


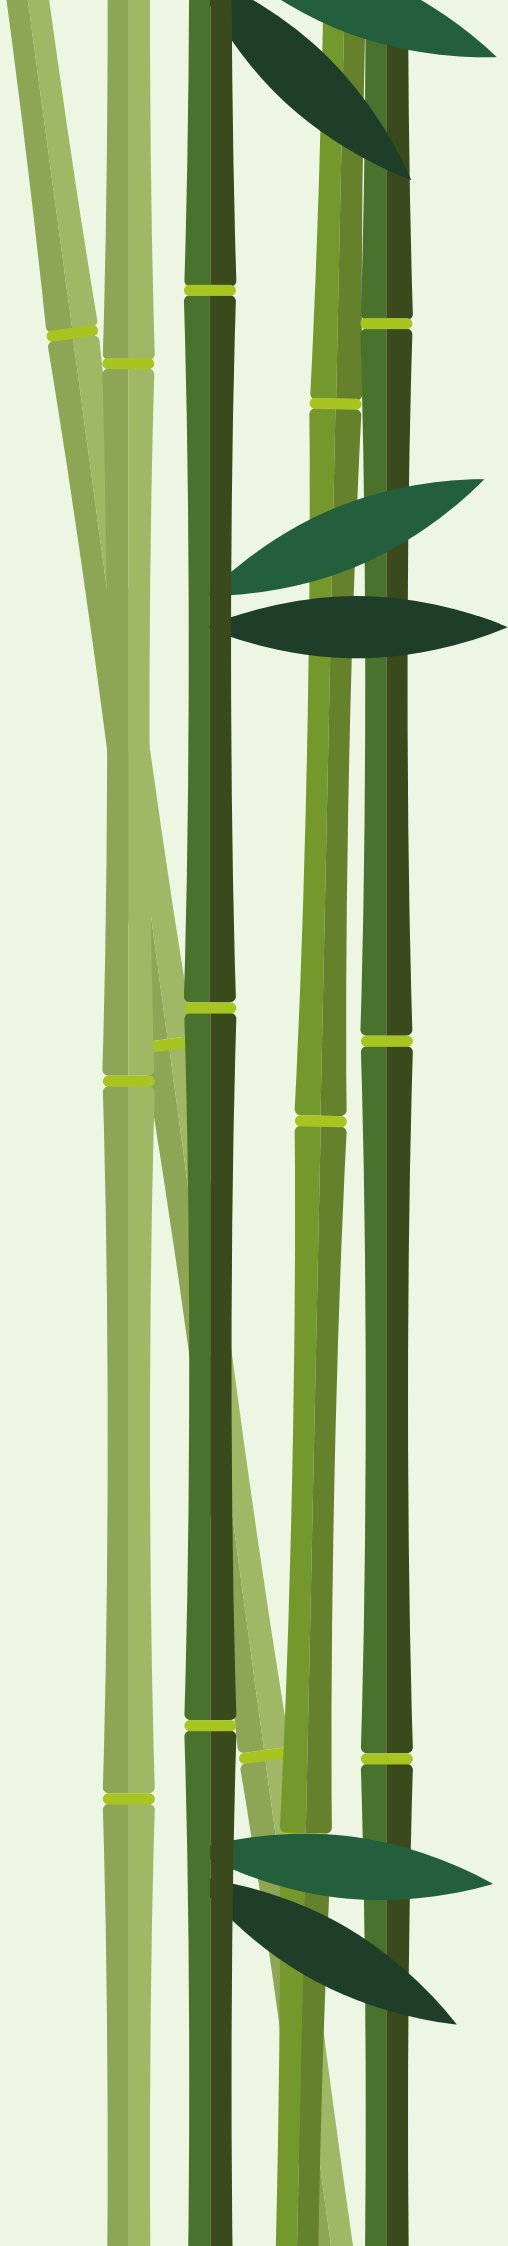

ART WPC BAMBOO

outdoor design

suitable for all environments

Index

The Company

Company	06
Strengths	07
A clean and sustainable product	09
What is Wpc Bamboo	10
Why choose our product	12
Features	14
Care and cleaning	120
Frequently asked questions	122
Partners	124
Completed projects	128
General sales conditions	132

Products

Fencing	17
Useful information	18
"Privacy Trend Deluxe" Fencing	20
"Privacy Deluxe" Fencing	26
"Vedo Non Vedo Trend Deluxe" Fencing	32
"Vedo Non Vedo Deluxe" Fencing	38
Posts	44
Fencing compositions	48
Assembly instructions	50

Flooring	55
Classic Flooring	60
Professional Flooring	62
Dock flooring	64
Flooring mounting accessories	65
Flooring supports	66
Flooring installation	68

Cladding	79
Classic Cladding	82
Professional Cladding	84
Professional Grecato Cladding	86
Grecato Large Cladding	88
Cladding mounting accessories	90
Installation instructions	92

Profiles	97
Flat and angular profiles	98
Bench profiles	100
Railing profiles	101

Sun Screens	103
Sun screens	104
Slim sun screens	106

Railings	109
Square profile railings	110
"L'Unica" Railings	114

Bamboo Canes	118
---------------------	------------

Company

Everything started from the commercialization of an innovative product, **WPC**: the encounter with this material pushed us to form a team of specialists in the use and treatment of bamboo fiber. From the team was born a commercial line, now established throughout Italy and abroad, and a company that produces various articles also to measure in WPC.

The products range from **ecological cladding** to **flooring, fencing, railings, finishing profiles, sun screens** and **finished articles** in various colors.

Bamboo composite has various characteristics that distinguish it from other materials.




Composed of 60% **bamboo fiber**, 30% recycled material and 10% reinforced plastic agents, **WPC is eco-sustainable**, water-resistant, weather and bacteria resistant, easy to clean, and very similar to wood in appearance.



Our Strengths

- Has obtained various **certifications** in a short time
- Has a wood-like appearance without its drawbacks
- Available in various colors
- **Non-deformable, mold and bacteria resistant, rot-proof**
- Resistant to moisture and UV rays
- Does not turn gray
- Free of toxic substances such as formaldehyde, benzene and radioactivity
- **Easy to clean and install**
- **Warranty:** all products are covered by warranty that will be issued by the company upon customer request depending on the product purchased

Given its performance, **Wood Plastic Composites** is ideal for use especially in **outdoor environments** such as gardens, parks, pools, beaches and many other spaces.

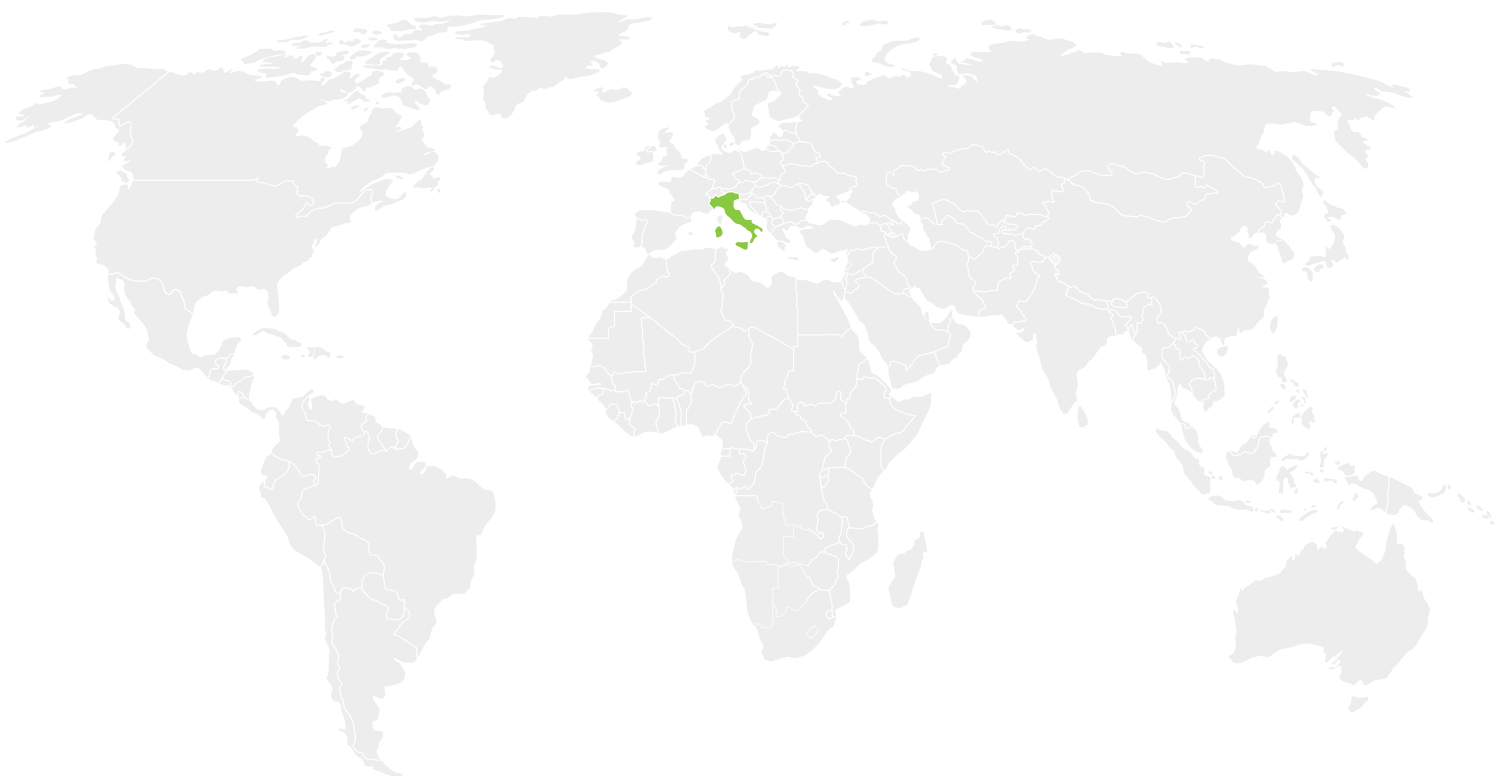



RESISTANT

INNOVATIVE


ECO-SUSTAINABLE

A Clean and Sustainable Product

In summary, bamboo composite is an **eco-sustainable product** as it uses thermoplastic (PE) recyclable plastics, thus reducing the volume of plastic waste, perfectly in line with European directive 2008/98/EC. The density of WPC Bamboo is so high that it can be compared with MDF.

The use of bamboo is an eco-sustainable solution, as it is a **plant with a rapid life cycle: an average of 3 years is enough to obtain raw material useful for its industrialization.**

It is an innovative material with zero impact and, due to its performance characteristics, suitable for outdoor environments.

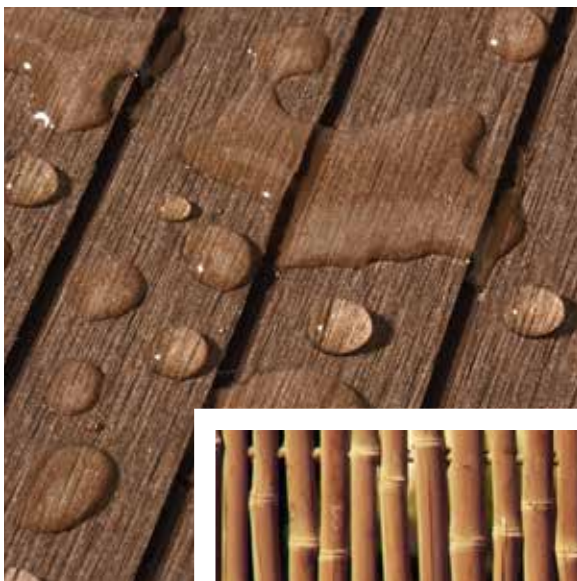

Versatile and resistant,
WPC is an excellent **eco-sustainable solution to replace wood**
even on large surfaces.

What is **WPC Bamboo** ?

It is an environmentally friendly product, composed of bamboo, natural recycling materials and a small part of technological plastic resins.



Processing

The material is extruded at high pressure and temperature by specific and professional machinery that determines its quality and durability.

Composition:

60%

bamboo fibers (dried)

30%

HDPE (recycled material)

10%

additives (anti-UV agents, antioxidants, stabilizers, colorants, reinforcers, adhesives, etc.)

Use

This material is perfect in various fields of design and eco-design. WPC Bamboo, in fact, is widely used in the furniture and construction sector.

Protagonist of a continuously expanding market, wood plastic composites is used in residential (for terraces, parks, gardens, bathrooms, stairs and other external or internal spaces of homes), in public with LCA - C.A.M. certification (for beaches, parks and public gardens, for decorative elements such as planters, for pools, docking piers and walkways, gazebos, pontoons, dividers, railings, non-slip steps and many other structures) and in commercial (shops, warehouses, etc.).



COMMERCIAL



PUBLIC



RESIDENTIAL

Certifications

Art WPC Bamboo

UNI EN 13501-1	Fire reaction for floor use
UNI EN 13501-1	Fire reaction for wall and ceiling use
UNI EN ISO 26987	Stain resistance
UNI EN 438-2	Abrasion resistance
UNI EN 12664	Thermal resistance
CEN/TS 15676	Slip resistance on dry surface
ISO 178	Flexural behavior
ISO 14040:2006 ISO 14044:2006	Minimum environmental criteria

Load tests for railings/delimiters available on request

Certifications and technical sheets of all flooring are available on request

Why **Choose** Our Product

01

100% eco-sustainable

02

Very similar to wood,
but without its drawbacks

03

Resistant to moisture and water,
rot-proof, tested in marine environments

04

Walkable barefoot, anti-slip or smooth,
does not crack or deform

05

Does not require preservative treatments
or gluing, very little maintenance

06

Weather resistant, thermal range
allowed from -40°C to +60°C

07

Unaffected by termites,
insects, anti-mold

08

Available in different colors

09

Easy to install and clean

10

Warranty on all products

MANY SOLUTIONS
in a single product



ECO-LOGICAL

For every ton of WPC BAMBOO we can save 2 trees of 30 years, reduce the emission of 5 tons of CO₂, save 80 barrels of oil, reduce pollution from 60,000 plastic bags.



COMPETITIVE

Assembly is easy and fast, through clips and supports, which makes the product economically competitive.



AESTHETIC

Excellent results in terms of aesthetic impact, versatility and flexibility. New construction needs are oriented towards this type of design product and "green" philosophy.



Features

Our bamboo fiber composite material requires no treatment, regular cleaning is sufficient. Furthermore, being resistant to water and UV rays, it is not affected by external stress and therefore is non-deformable. Therefore, over time it resists wear, not forming splinters or cracks and maintaining its coloration without graying.





Easy installation

Modular, cuttable and interlocking

No maintenance

Perfect for setting up terraces and fences

Does not splinter

Non-deformable

UV RESISTANT

Chlorine resistant

fencing

Weather resistance, UV stress resistance, being non-deformable, unaffected by mold and rot-proof makes WPC Bamboo the ideal ally for creating outdoor structures.

Privacy Trend Deluxe

Privacy Deluxe

Vedo Non Vedo Trend Deluxe

Vedo Non Vedo Deluxe

useful info

Trend and Deluxe line fences with Privacy and Vedo Non Vedo models are classified as **delimiters** (they are not railings, for which safety regulations are required).

Deluxe line fences in Privacy and Vedo Non Vedo models are made with 60% bamboo fiber composite material, 30% HDPE (recycled material) and are coated with a high-density resistant **polymer**.

- **Zero maintenance, water-repellent and stain-resistant.** Any cleaning can be performed using simple degreaser and pressure washer.

N.B. To guarantee the product, it is necessary to follow the assembly instructions (see indications in the catalog).

Our fences are supplied in **standard modules**, they can possibly be adapted to your needs by cutting both the slats and columns on site, using a disc for cutting aluminum or wood.

- **We do not perform custom cuts.**
- **We do not supply vehicular and pedestrian gates.** We can possibly supply the material but for the structure it is necessary to contact a craftsman in your area.
- **Product disposal:** Disposal in bulk waste.

PRODUCT WARRANTY: Our product is guaranteed for 15 years, following the assembly instructions.

Privacy Trend e Deluxe Line: Fencing module for complete coverage, width approximately 1500 mm, variable height (see measurements indicated in catalog).

Vedo Non Vedo Trend and Deluxe Line: Fencing module for partial coverage, width approximately 2000 mm, with standard distance of 20 mm between slats. To vary the distance between slats, we can supply a 2050 mm profile for possible on-site customizations. Variable height (see measurements indicated in catalog).

For this model we supply slat and reinforcement core. This system ensures that the material does not deform.

Both models are supplied with **closure KIT** (for more information see catalog).

Trend Modelli Privacy and Vedo Non Vedo Models: Aluminum column, WPC slat with similar coloring.

Fixing system: Aluminum plate

Fixing dowels: Material not supplied for installation. We recommend mechanical dowel diameter 10 mm, length 100/120 mm or chemical dowel (make sure to have a suitable support to fix the dowels).

Deluxe Line Privacy and Vedo Non Vedo Models: Hot-dip galvanized iron post, WPC column, WPC slat in the same color.

Fixing system: Hot-dip galvanized iron plate, for doweling, side and tilting (New).

Fixing dowels: Material not supplied for installation. We recommend mechanical dowel diameter 10 mm, length 100/120 mm or chemical dowel (make sure to have a suitable support to fix the dowels).




NEW!

ALUMINUM COLUMN

Privacy Trend Deluxe

Design color in line with current trends

components **privacy trend deluxe**

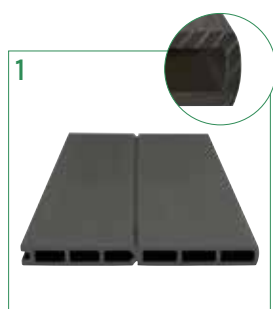

Beveled
terminal slat



Classic slat




Closure kit



Aluminum
finishing profile
H. 2050 mm



Complete
aluminum column
with 2 or 3 slots



Interior: WPC Bamboo

Exterior: High-density resistant polymer



fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes

fencing

Privacy Trend Deluxe

For correct installation respect the 1500 mm center distance (from column center to column center)

■ Equal slats on both sides



In columns any closure profiles (spacer bar h2050 mm) must be requested.

The model is supplied with closure kit.

Available colors for in wpc bamboo slats *



Dark Grey Lux



Light Grey Lux

Actual colors may differ from those shown, color samples may be requested *

ELEMENTS



CLASSIC SLAT



BEVELED TERMINAL SLAT

Closes the fence in height



CLOSURE KIT




ALUMINUM FINISHING PROFILE

to be inserted in the slot of the spacer column H. 2050 mm



ALUMINUM COLUMN 70x70mm


Plate 130x130mm
Thickness 6mm

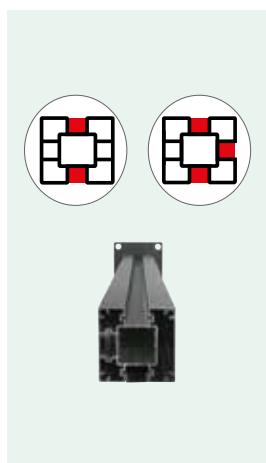

COMPLETE ALUMINUM COLUMN 2 OR 3 SLOTS

complete with plate, plastic cap, aluminum profile for third slot closure







TECHNICAL DRAWINGS

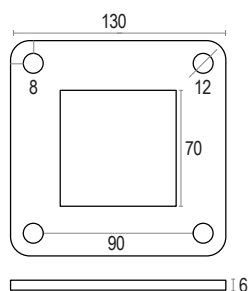

Aluminum column plate

Privacy Trend Deluxe


TECHNICAL DRAWINGS

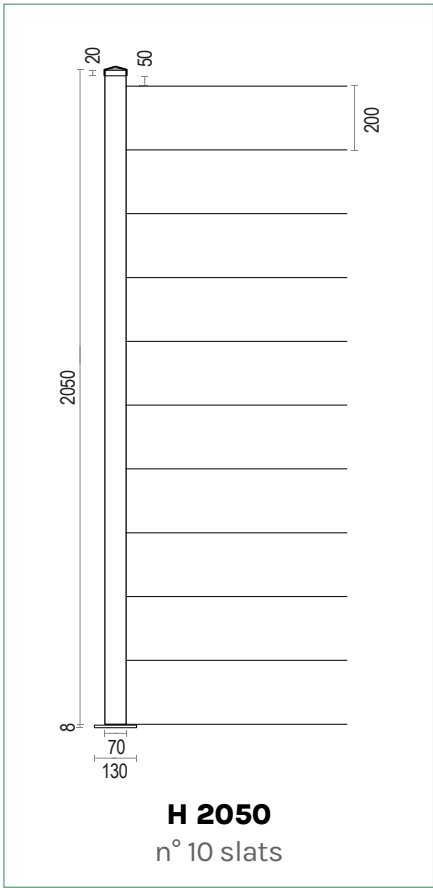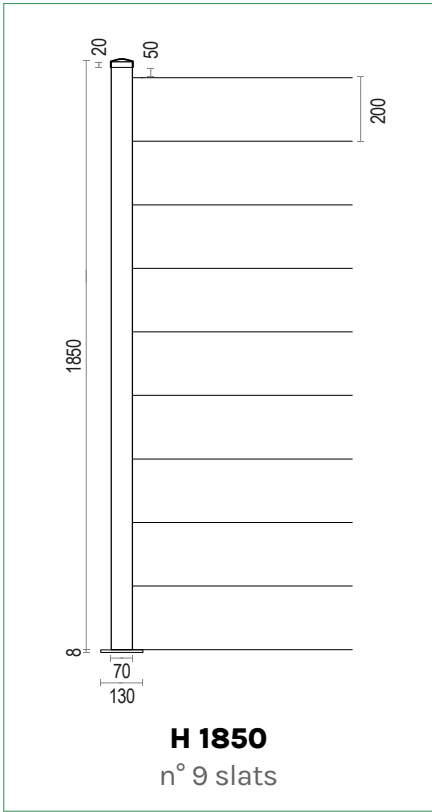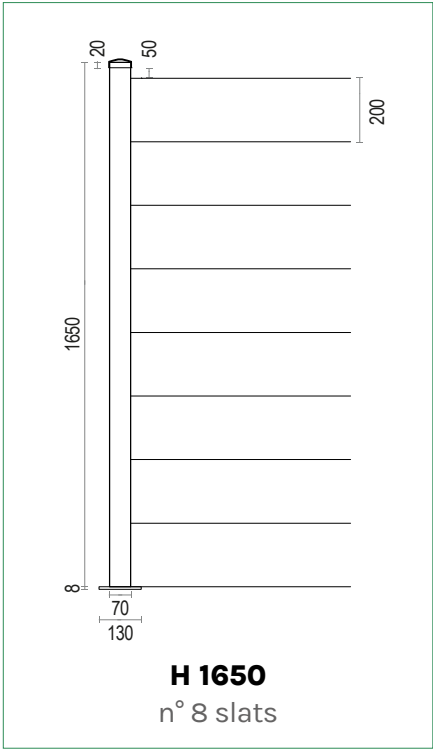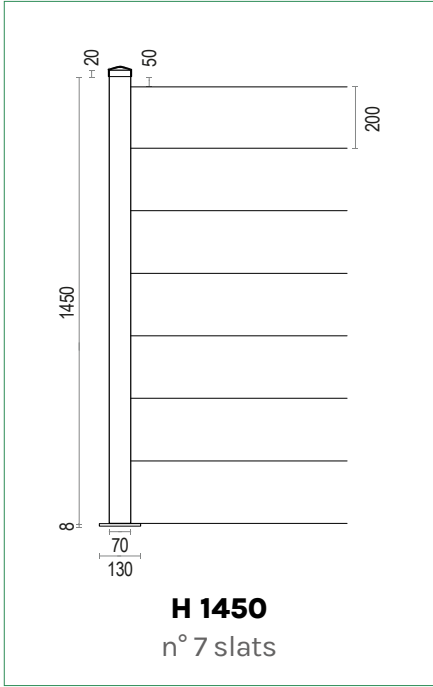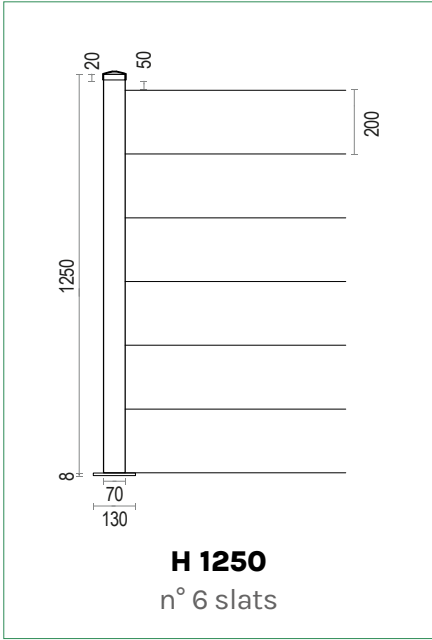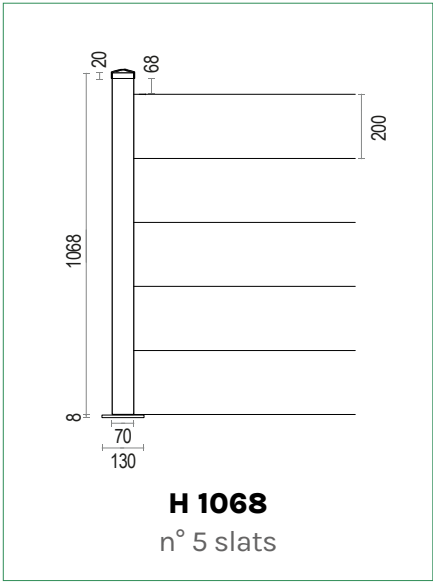

PRICE LIST CODES

Features		Price list codes and colors		Dimensioni (mm) L x H x Th.
WPC BAMBOO SLATS		Dark Grey Lux	Light Grey Lux	
Classic slat		AF140-1DGS	AF140-1DGC	1450x205x20
Beveled terminal slat		AF140-3DGS	AF140-3DGC	1450x205x20
ALLUMINUM COLUMNS		Dark Grey Lux	Light Grey Lux	
Column 2/3 slots		AF113GS	AF119GC	1068x70x70
Column 2/3 slots		AF114GS	AF120GC	1250x70x70
Column 2/3 slots		AF115GS	AF121GC	1450x70x70
Column 2/3 slots		AF116GS	AF122GC	1650x70x70
Column 2/3 slots		AF117GS	AF123GC	1850x70x70
Column 2/3 slots		AF118GS	AF124GC	2050x70x70
ALLUMINUM SPACERS		Dark Grey Lux	Light Grey Lux	
Aluminum spacers to be inserted in vertical slot of aluminum columns		AF121GS	AF121GCH	2050 H
CLOSURE KIT				Price list code
Closure kit for PRIVACY fencing including: two hooks with screws and reinforcement core L 1450mm				KIT-P

The **PRIVACY TREND** line in light gray and dark gray **remains available** until stock is exhausted.

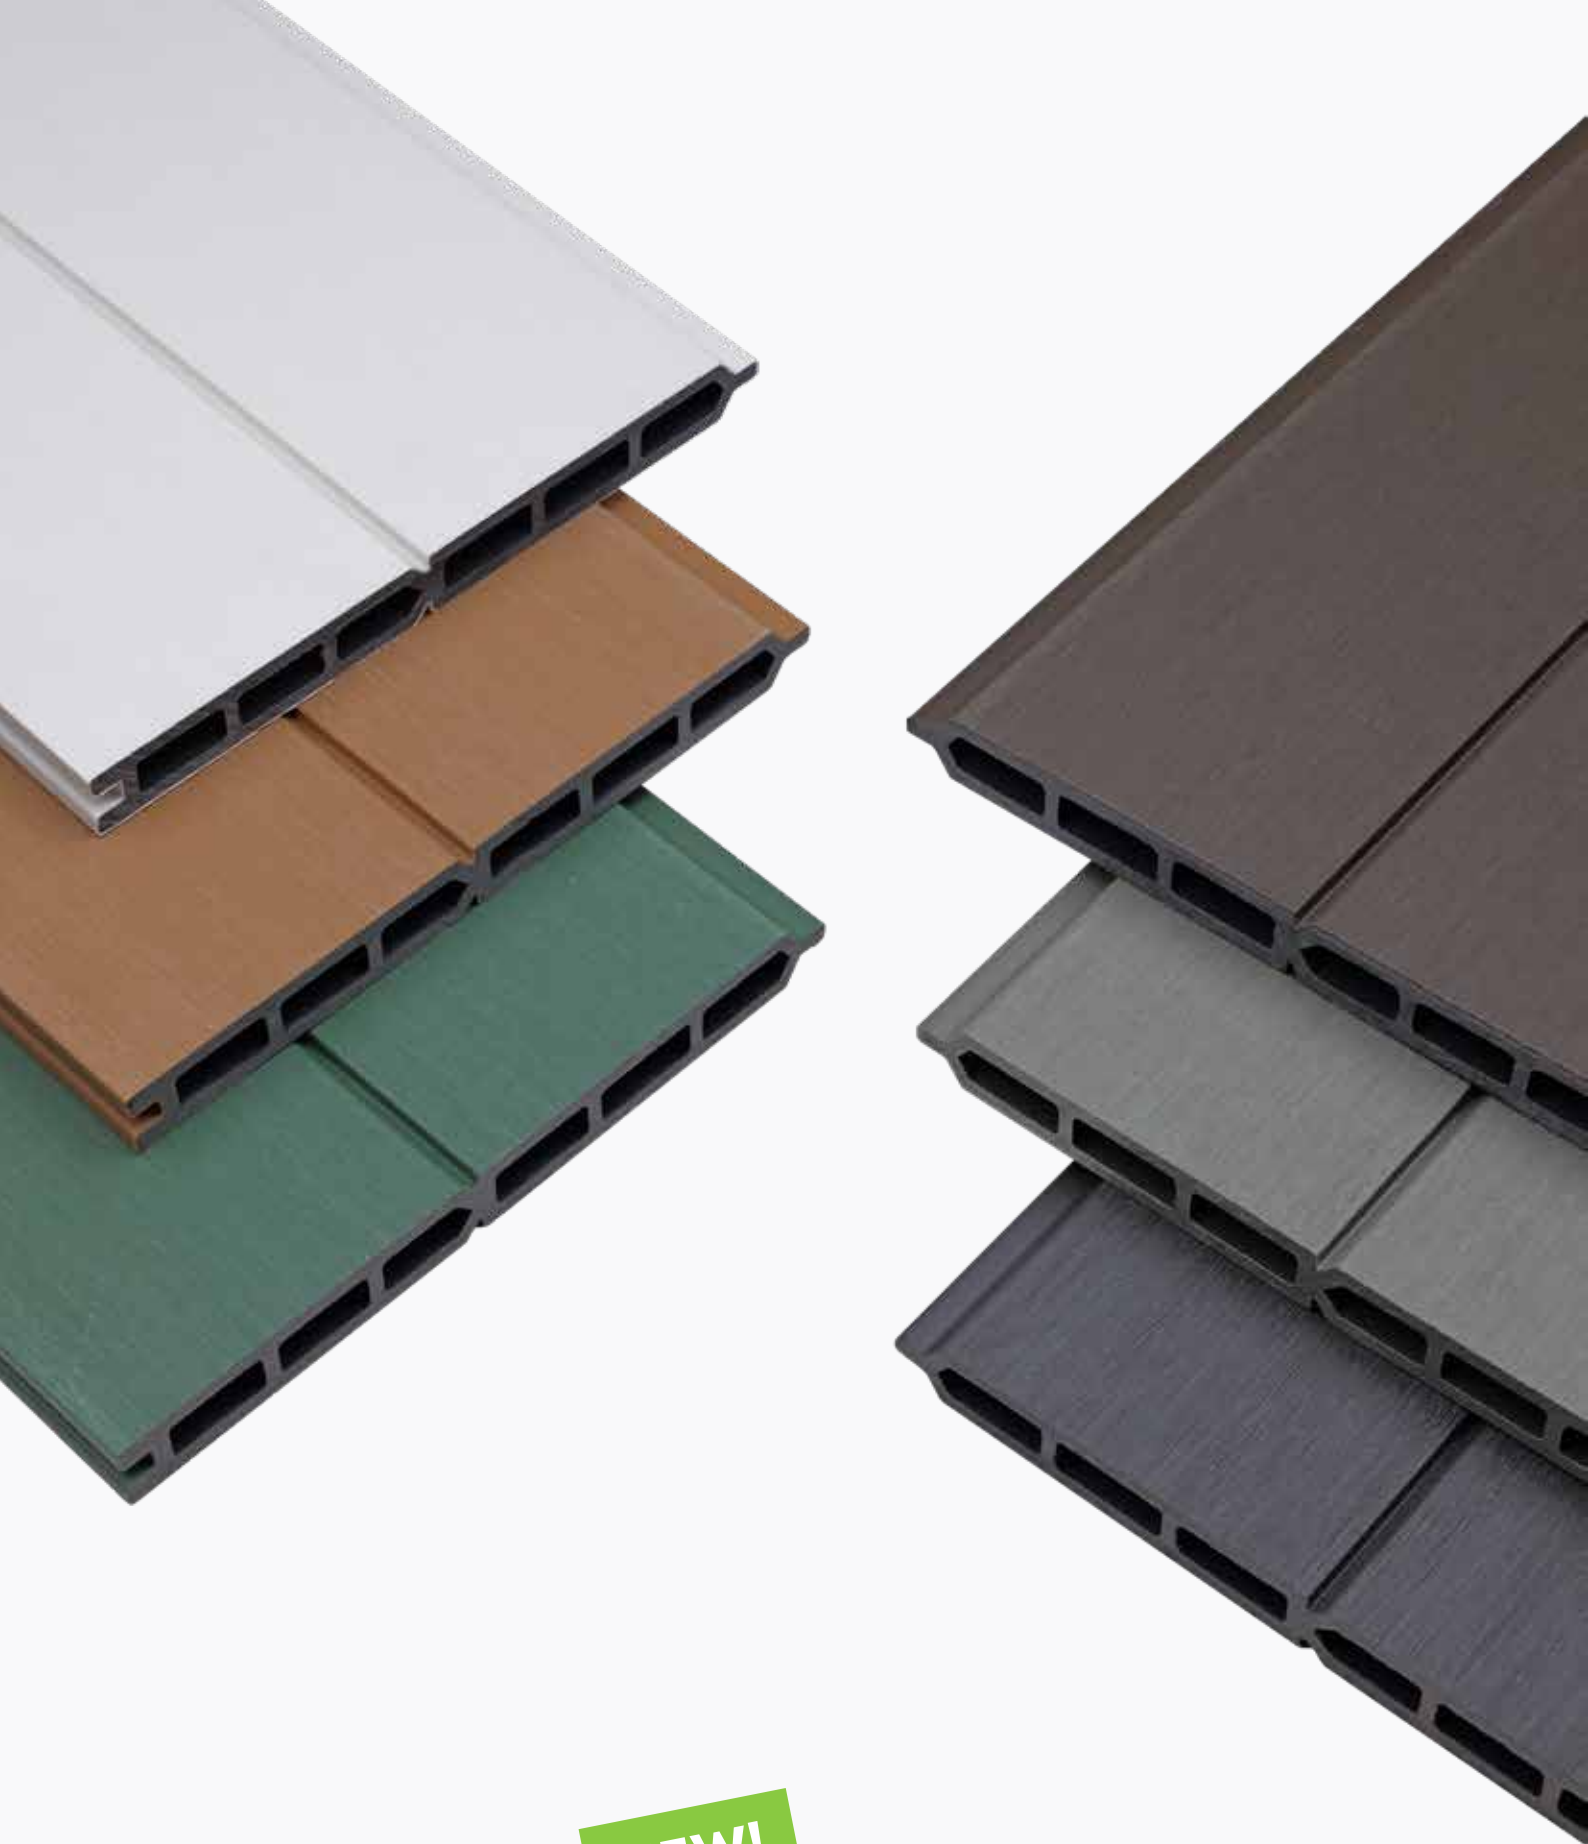


NEW!

Privacy Deluxe

Zero maintenance, water-repellent and stain-resistant are the features of the new co-extruded fence

components **privacy deluxe**

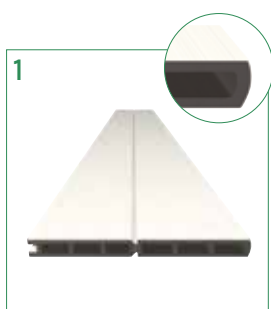

Beveled
terminal slat



Classic slat



Closure kit



WPC column
with 2 or 3 slots
for corners



WPC
finishing profile
H. 2050mm



WPC
closure cap



Interior: WPC Bamboo
Exterior: High-density resistant polymer



Privacy Deluxe


For correct installation respect the 1520 mm center distance (from column center to column center)

Equal slats on both sides



In columns any closure profiles (spacer bar h2050 mm) must be requested.
The model is supplied with closure kit.

Available colors for WPC bamboo
slats and columns *

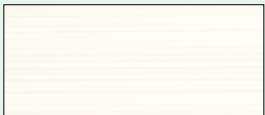

White Lux



Light Grey Lux



Hazel Lux



Dark Grey Lux



Green Lux



Wengè Lux

Actual colors may differ from those shown, color samples may be requested *

ELEMENTS



CLASSIC SLAT



BEVELED TERMINAL SLAT

Closes the fence in height



CLOSURE KIT



CLOSURE CAP




WPC FINISHING PROFILE


to be inserted in the column slot



WPC COLUMN
100x100 mm

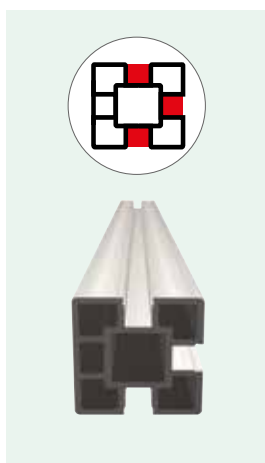

WPC COLUMN 3 SLOTS
for fence corners

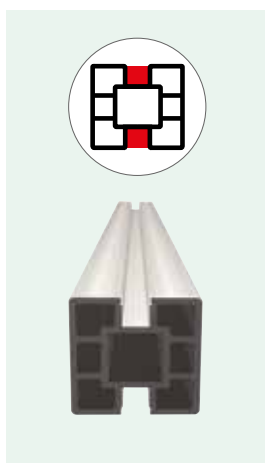


WPC COLUMN 2 SLOTS
for the central part of the fence


7 different types of posts are available for this model.

See page 44 for all technical information and **choose the one most suitable for your needs.**


TECHNICAL DRAWINGS

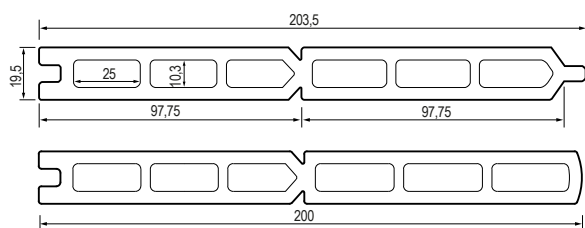

Co-extruded slats
Normal and beveled









Doweling plate
for fences H 1000 - 1200 - 1400

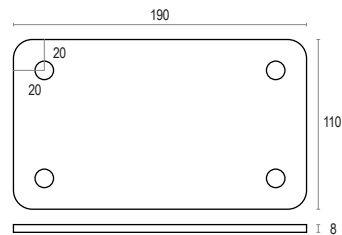

Doweling plate
for fences H 1600 - 1800 - 2000

Privacy Deluxe

TECHNICAL DRAWINGS

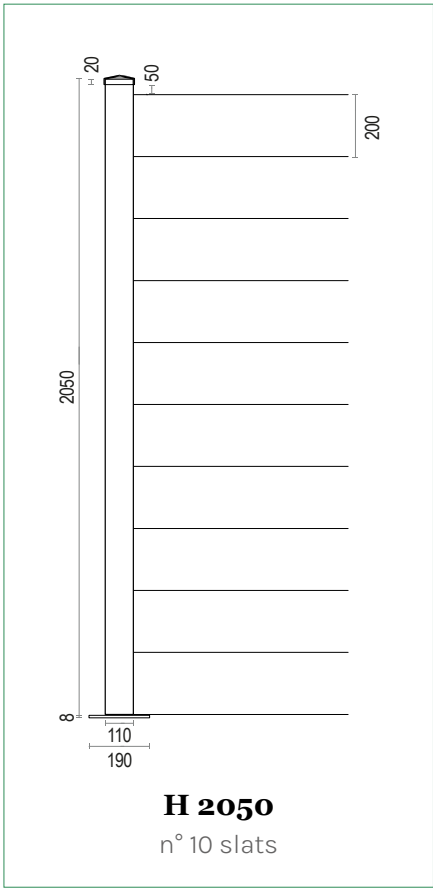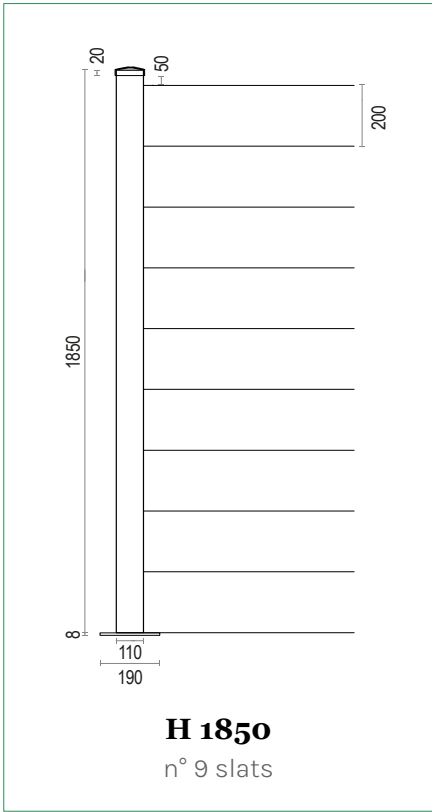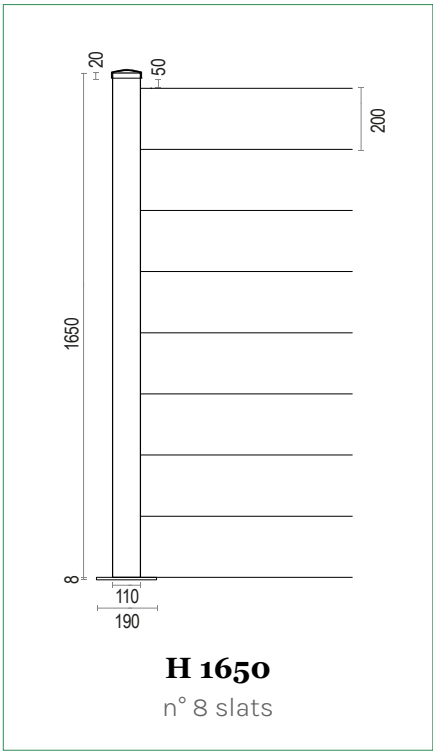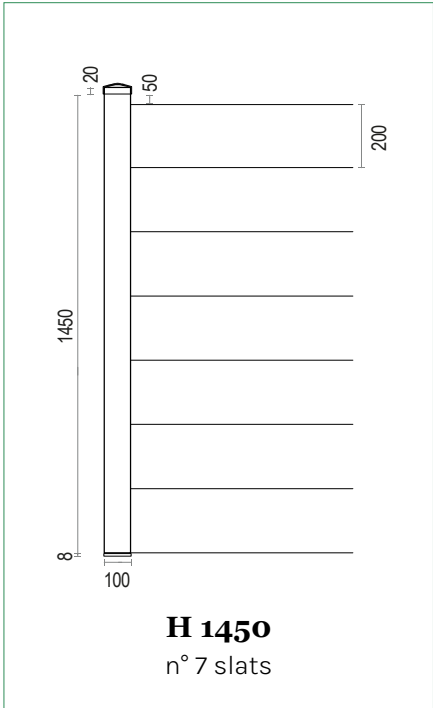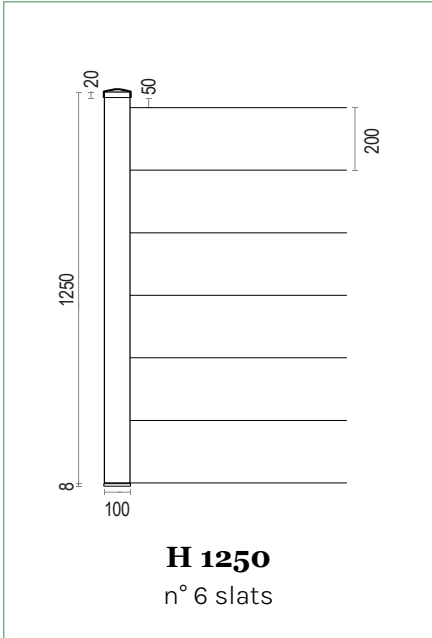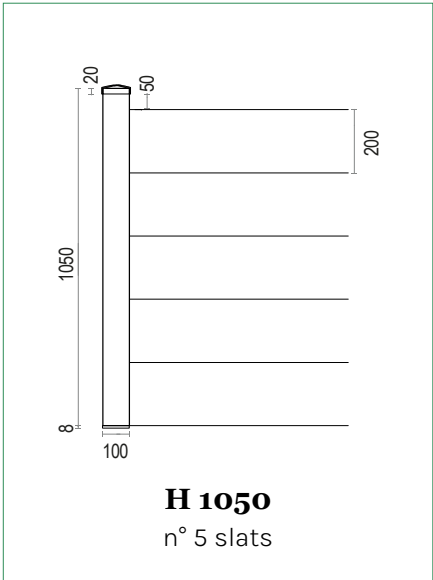

FEATURES	Price list codes and colors						Dimensions (mm) L x H x Th.
WPC BAMBOO SLATS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
Classic slat	AF170-1DB	AF170-1DN	AF170-1DV	AF170-1DW	AF140-1DGS	AF140-1DGC	1450x205x20
Beveled terminal slat	AF170-3DB	AF170-3DN	AF170-3DV	AF170-3DW	AF140-3DGS	AF140-3DGC	1450x200x20
Classic slat	AF170-2900DB	AF170-2900DN	AF170-2900DV	AF170-2900DW			2900x205x20
Beveled terminal slat	AF170-1-2900DB	AF170-1-2900DN	AF170-1-2900DV	AF170-1-2900DW			2900x205x20
WPC BAMBOO COLUMNS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
Column 3 slots	AF171DB-1050	AF171DN-1050	AF171DV-1050	AF171DW-1050	AF171DGS-1050	AF171DGC-1050	1050x100x100
Column 3 slots	AF171DB-1250	AF171DN-1250	AF171DV-1250	AF171DW-1250	AF171DGS-1250	AF171DGC-1250	1250x100x100
Column 3 slots	AF171DB-1450	AF171DN-1450	AF171DV-1450	AF171DW-1450	AF171DGS-1450	AF171DGC-1450	1450x100x100
Column 3 slots	AF171DB-1650	AF171DN-1650	AF171DV-1650	AF171DW-1650	AF171DGS-1650	AF171DGC-1650	1650x100x100
Column 3 slots	AF171DB-1850	AF171DN-1850	AF171DV-1850	AF171DW-1850	AF171DGS-1850	AF171DGC-1850	1850x100x100
Column 3 slots	AF171DB-2050	AF171DN-2050	AF171DV-2050	AF171DW-2050	AF171D-GS-2050	AF171D-GC-2050	2050x100x100
Column 2 slots	AF171-1DB	AF171-1DN	AF171-1DV	AF171-1DW	AF171-1DGS	AF171-1DGC	1050x100x100
Column 2 slots	AF171-2DB	AF171-2DN	AF171-2DV	AF171-2DW	AF171-2DGS	AF171-2DGC	1250x100x100
Column 2 slots	AF171-3DB	AF171-3DN	AF171-3DV	AF171-3DW	AF171-3DGS	AF171-3DGC	1450x100x100
Column 2 slots	AF171-4DB	AF171-4DN	AF171-4DV	AF171-4DW	AF171-4DGS	AF171-4DGC	1650x100x100
Column 2 slots	AF171-5DB	AF171-5DN	AF171-5DV	AF171-5DW	AF171-5DGS	AF171-5DGC	1850x100x100
Column 2 slots	AF171-6DB	AF171-6DN	AF171-6DV	AF171-6DW	AF171-6DGS	AF171-6DGC	2050x100x100
WPC SPACERS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
WPC spacers to insert in vertical slot of WPC columns	AF119DB	AF119ND	AF119VD	AF119WD	AF119GSD	AF119GCD	H 2050
CLOSURE CAPS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
WPC closure cap	AF1313DB	AF1313ND	AF1313VD	AF1313WD	AF1313GSD	AF1313GCD	110x110x43
CLOSURE KIT					Price list codes		
Closure kit for PRIVACY fencing including: two hooks with screws and reinforcement core L 1450mm					KIT-P		
FEATURES		Price list codes			Dimensions (mm)		
GALVANIZED POSTS							
Galvanized post with doweling plate		AF400Z	Base 100x100x8 - Round holes Tubular 40x40x2,5 - H 1000			For fences height 1000 - 1200 - 1400	
		AF403Z	Base 190X110X8 - Round holes Tubular 40x40x2,5 - H 1200			For fences height 1600 - 1800 - 2000	
Galvanized immersion post		AF404Z	40x40x2 - H 1200				
		AF402Z	40x40x2 - H 1500				
		AF405Z	40x40x2 - H 2000				
Side post		AF407Z	Base 190x110 - Tubular 40x40 - H 1000				
Concave corner post		AF408Z	Double plate 160x100 to fix to wall H1000 and tube 40x40				
Convex corner post		AF409Z	Double plate 160x100 to fix to wall H1000 and tube 40x40				
Tilting post		AF410Z	100 x 100 x H 1000				
PIANTANE CONSIGLIATE							
PRIVACY		For fences height 1050 - 1250 mm					post 100x100
PRIVACY		For fences height 1450 - 1650 - 1850 - 2050 mm					post 190x100

The **PRIVACY DELUXE** line in classic, Hazel, Green e wengè **remains available** until stock is exhausted.

fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes



NEW!

ALUMINUM COLUMN

Vedo Non Vedo Trend Deluxe




Design color
in line with current trends

vedo non vedo trend deluxe



Classic slat

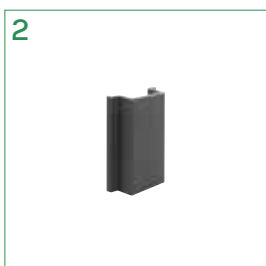

Aluminum spacer
H. 20mm



Closure kit




Complete aluminum
column with
2 or 3 slots



Reinforcement core
cold galvanized tube



Aluminum
spacer
H. 2050mm



Interior: WPC Bamboo
Exterior: High-density
resistant polymer

Vedo Non Vedo Trend Deluxe

For correct installation respect the 2040 mm center distance (from column center to column center)

■ Front and rear side fencing



Fencing with ALUMINUM columns for standard modules 2040 mm center distance with 20 mm standard light gap		
H	N° slats	N° spacers
H1068	7	12
H1250	8	14
H1518	10	18
H1650	11	20
H1850	12	22
H2050	13	24

The spacer is intended starting from the next slat and not from the ground

In columns any closure profiles (spacer bar h2050 mm) must be requested.

The slats are supplied with a galvanized steel reinforcement core L 1900x20x10mm to ensure better robustness over time.

The model is supplied with closure kit.


Available colors for WPC bamboo slats *



Dark Grey Lux

Light Grey Lux

Available colors for aluminum columns *

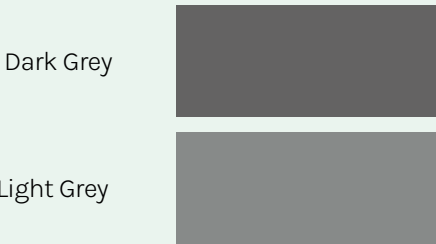

Dark Grey

Light Grey

Actual colors may differ from those shown, color samples may be requested *

ELEMENTS




"VEDO NON VEDO" SLAT



ALUMINUM FINISHING PROFILE
to be inserted in the column slot H. 20mm and spacer H. 2050mm




COLD GALVANIZED TUBE REINFORCEMENT CORE

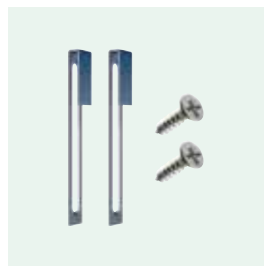

CLOSURE KIT




ALUMINUM COLUMN 70x70mm
Plate 130x130mm
Thickness 6mm

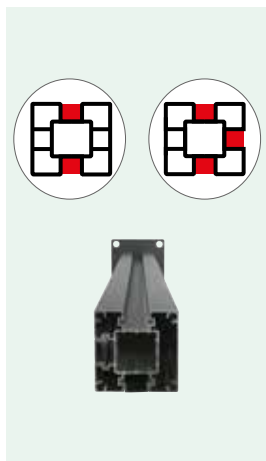


COMPLETE ALUMINUM COLUMN 2 OR 3 SLOT
complete with plate, plastic cap, aluminum profile for third slot closure

TECHNICAL DRAWINGS

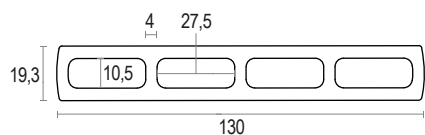







"Vedo non vedo" slat

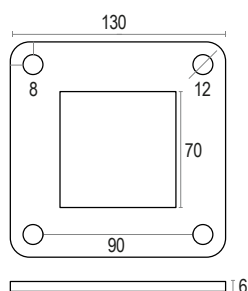

Aluminum column plate

Vedo Non Vedo Trend Deluxe

TECHNICAL DRAWINGS

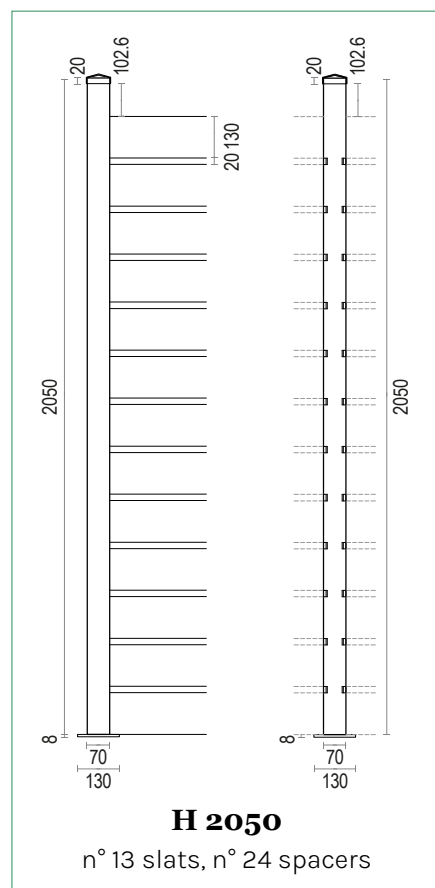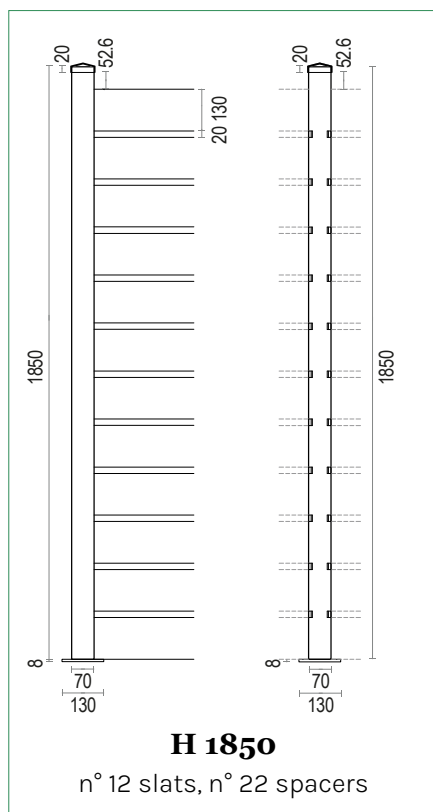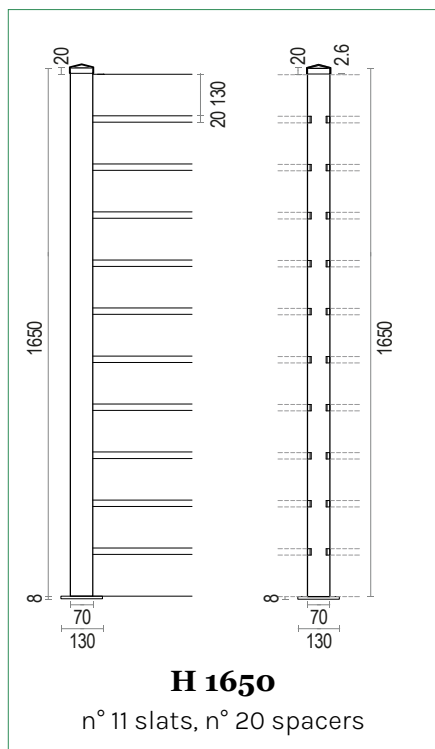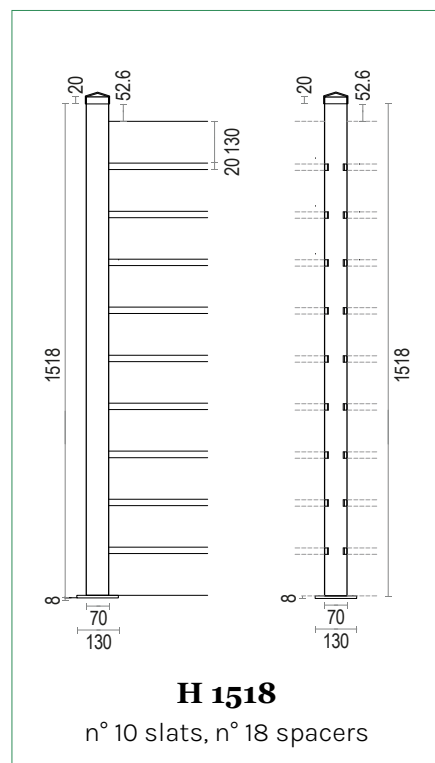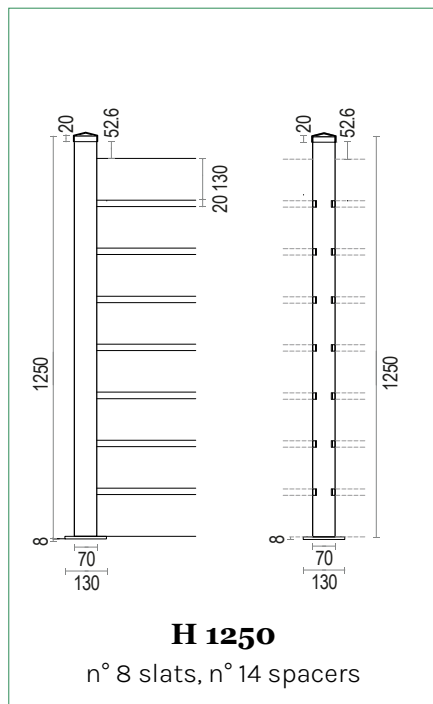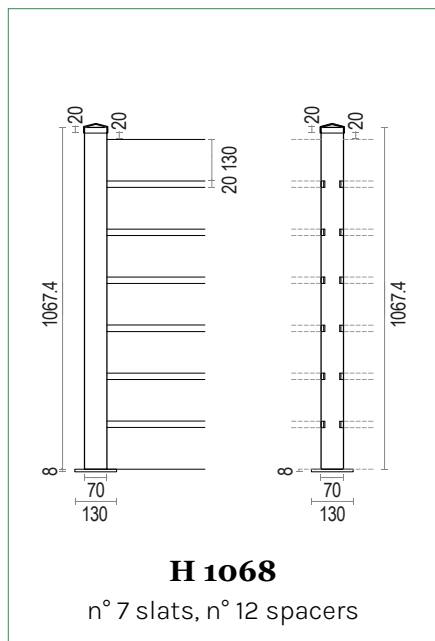

PRICE LIST CODES

Features	Price list codes and colors		Dimensions (mm) L x H x Th.
WPC BAMBOO SLATS	Dark Grey Lux	Light Grey Lux	
"Vedo non vedo" slat	AF180-1GSD	AF180-1GCD	1990x130x20
Reinforcement core	ANIMA		Cold-galvanized tubular 1990x20x10
ALUMINUM COLUMNS	Dark Grey Lux	Light Grey Lux	
2/3 groove column Complete with everything	AF113GS	AF119GC	1068x70x70
	AF114GS	AF120GC	1250x70x70
	AF115GS	AF121GC	1518x70x70
	AF116GS	AF122GC	1650x70x70
	AF117GS	AF123GC	1850x70x70
	AF118GS	AF124GC	2050x70x70
ALUMINUM SPACERS	Dark Grey Lux	Light Grey Lux	
Aluminum spacers for small thickness	AF120GS	AF120GCH	20 H
Aluminum spacers to insert on vertical groove of aluminum columns	AF121GS	AF121GCH	2050 H
CLOSING KIT			List Code
Closing kit for Vedo Non Vedo fencing including: two hooks with screws			KIT-VNV

The **VEDO NON VEDO** light gray and dark gray line **remains available** until stock depletion.



NEW!

Vedo Non Vedo Deluxe

Zero maintenance, water-repellent and stain-resistant are the characteristics of the new co-extruded fencing

vedo non vedo deluxe



Classic slate



WPC spacer
H. 20 mm



Closing kit



WPC
closing cap




WPC column
with 2 or 3 grooves
for corners



Cold-galvanized
reinforcement
tube core



WPC finishing profile
H. 2050 mm



Interior: WPC Bamboo
Exterior: High-density resistant polymer




Vedo Non Vedo Deluxe

For correct installation respect the 2060mm spacing (from column center to column center)

■ Same boards on both sides



Customizable light space

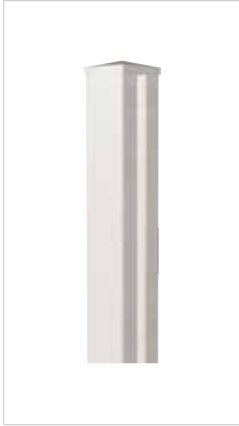

Fence with WPC columns for standard modules spacing 2060mm with standard light space of 20mm			
	H	N° slats	N° spacers
	H 1050	7	12
	H 1250	8	14
	H 1450	9	16
	H 1650	11	20
	H 1850	12	22
	H 2050	13	24

The spacer is intended starting from the next board and not from the ground

Boards are supplied with a galvanized steel reinforcement core L1900x20x10mm to guarantee better strength over time.

In columns, any closing profiles (spacer bar h2050mm) must be requested.

The model is supplied with closing kit.

Available colors for WPC bamboo boards and columns *



White Lux



Light Grey Lux



Hazel Lux



Dark Grey Lux



Green Lux



Wengè Lux

Actual colors may differ from those shown; color samples can be requested *

ELEMENTS




**"VEDO NON VEDO"
SLAT**




**WPC FINISHING PRO-
FILE TO INSERT IN THE
COLUMN GROOVE**



**COLD-GALVANIZED
REINFORCEMENT
TUBE CORE**

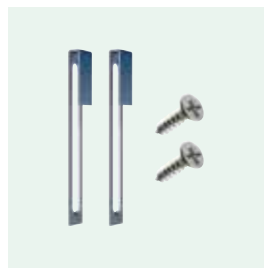


CLOSING KIT

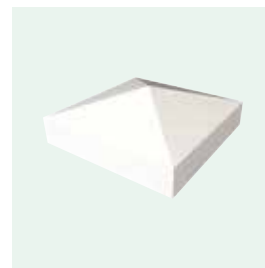


CLOSING CAP



WPC COLUMN
100x100 mm

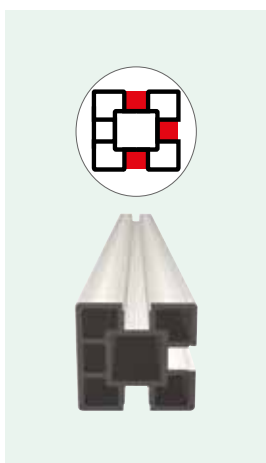

**WPC COLUMN
3 GROOVES
FOR FENCE CORNERS**
for fence corners

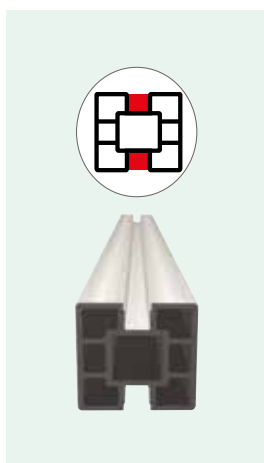


**WPC COLUMN
2 GROOVES**
for the central part
of the fence


7 different types of posts are available for this model.

See page 44 for all technical information and **choose the one most suitable for your needs.**


TECHNICAL DRAWINGS

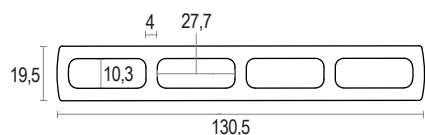


"Vedo non vedo" Slat



Spacer

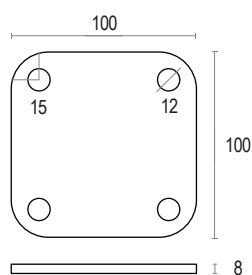







Anchor plate

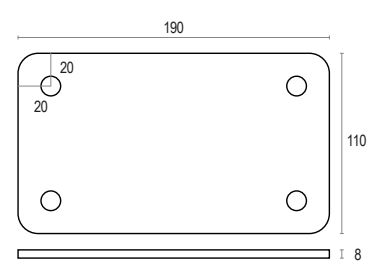

Anchor plate
for fences H 1600 - 1800 - 2000

Vedo Non Vedo Deluxe

TECHNICAL DRAWINGS

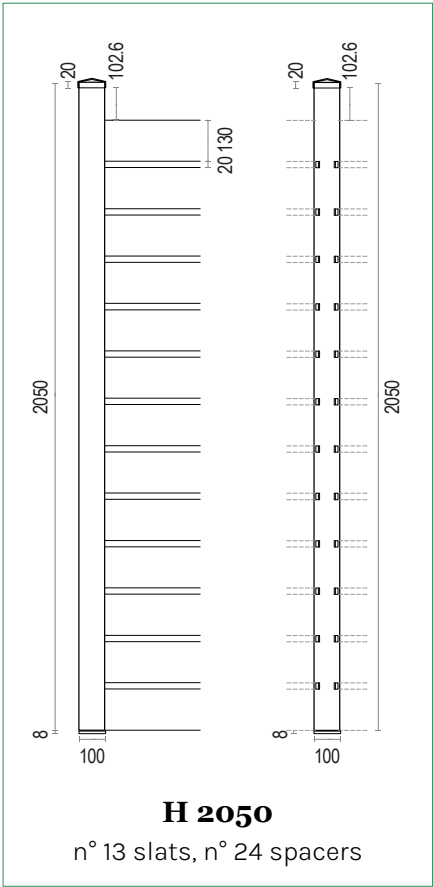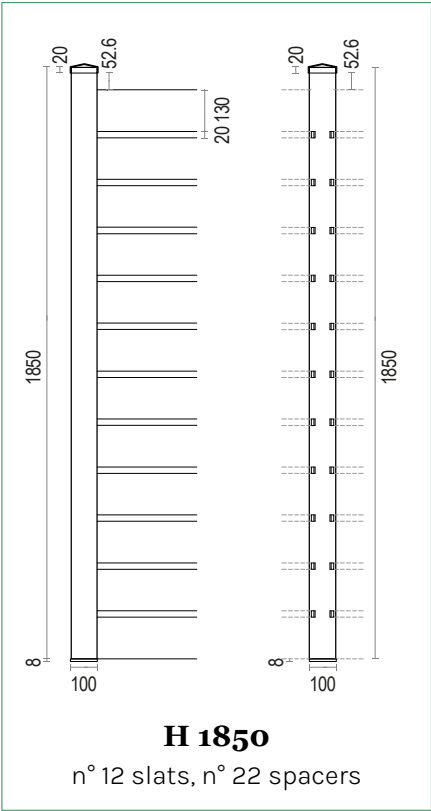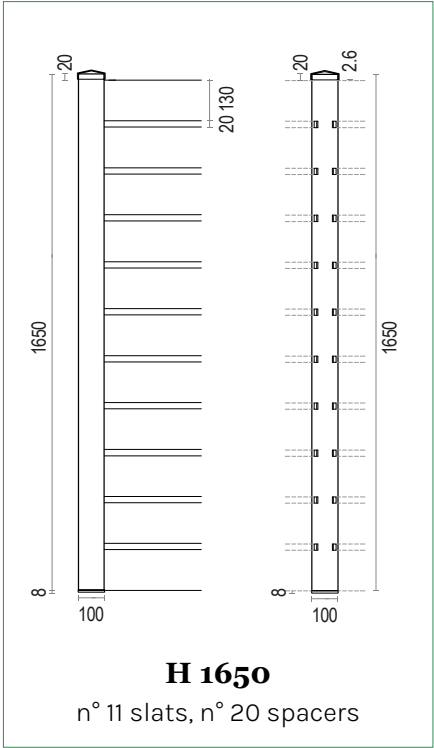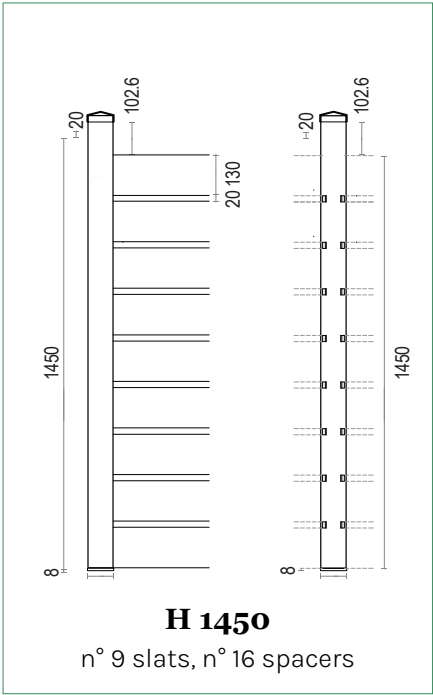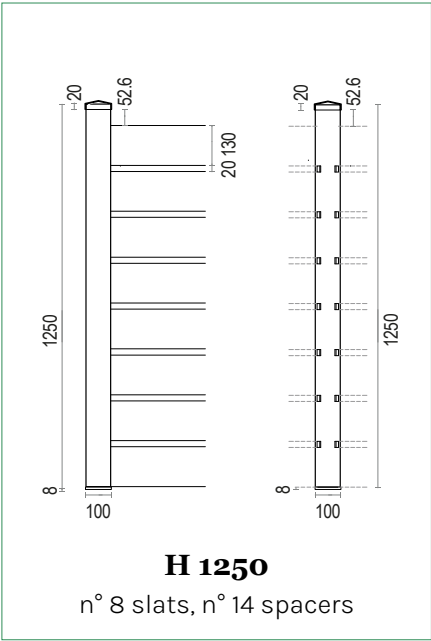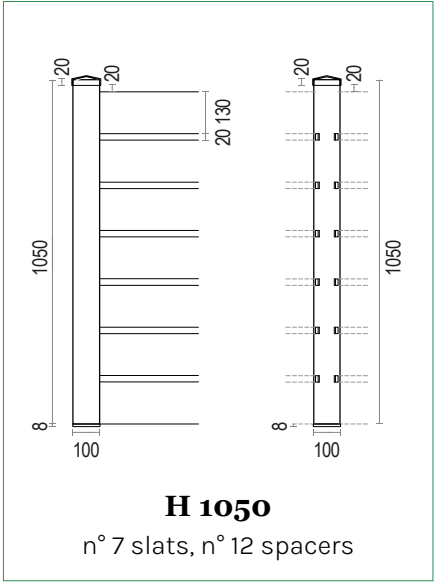

PRICE LIST CODES

Features	Price list codes and colors						Dimensions (mm) L x H x Th.
WPC BAMBOO SLATS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
"Vedo non vedo" slat	AF112BD	AF112NDX	AF112VDX	AF112WDX	AF180-1GSD	AF180-1GCD	1990x130x20
"Vedo non vedo" slat	AF113BD	AF113NDX	AF113VDX	AF113WDX	AF181-1GSD	AF181-1GCD	1450x130x20
Reinforcement core	ANIMA	ANIMA	ANIMA	ANIMA	ANIMA	ANIMA	1990x20x10
Reinforcement core	ANIMA 1450	ANIMA 1450	ANIMA 1450	ANIMA 1450	ANIMA 1450	ANIMA 1450	1450x20x10
WPC BAMBOO COLUMNS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
Column 3 slots	AF171DB-1050	AF171DN-1050	AF171DV-1050	AF171DW-1050	AF171DGS-1050	AF171DGC-1050	1050x100x100
Column 3 slots	AF171DB-1250	AF171DN-1250	AF171DV-1250	AF171DW-1250	AF171DGS-1250	AF171DGC-1250	1250x100x100
Column 3 slots	AF171DB-1450	AF171DN-1450	AF171DV-1450	AF171DW-1450	AF171DGS-1450	AF171DGC-1450	1450x100x100
Column 3 slots	AF171DB-1650	AF171DN-1650	AF171DV-1650	AF171DW-1650	AF171DGS-1650	AF171DGC-1650	1650x100x100
Column 3 slots	AF171DB-1850	AF171DN-1850	AF171DV-1850	AF171DW-1850	AF171DGS-1850	AF171DGC-1850	1850x100x100
Column 3 slots	AF171DB-2050	AF171DN-2050	AF171DV-2050	AF171DW-2050	AF171DGS-2050	AF171DGC-2050	2050x100x100
Column 2 slots	AF171-1DB	AF171-1DN	AF171-1DV	AF171-1DW	AF171-1DGS	AF171-1DGC	1050x100x100
Column 2 slots	AF171-2DB	AF171-2DN	AF171-2DV	AF171-2DW	AF171-2DGS	AF171-2DGC	1250x100x100
Column 2 slots	AF171-3DB	AF171-3DN	AF171-3DV	AF171-3DW	AF171-3DGS	AF171-3DGC	1450x100x100
Column 2 slots	AF171-4DB	AF171-4DN	AF171-4DV	AF171-4DW	AF171-4DGS	AF171-4DGC	1650x100x100
Column 2 slots	AF171-5DB	AF171-5DN	AF171-5DV	AF171-5DW	AF171-5DGS	AF171-5DGC	1850x100x100
Column 2 slots	AF171-6DB	AF171-6DN	AF171-6DV	AF171-6DW	AF171-6DGS	AF171-6DGC	2050x100x100
DISTANZIALI IN WPC	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
WPC spacers for small thickness	AF118DB	AF118ND	AF118VD	AF118WD	AF118GSD	AF118GCD	20 H
WPC spacers to insert on vertical groove of WPC columns	AF119DB	AF119ND	AF119VD	AF119WD	AF119GSD	AF119GCD	2050 H
CLOSING CAPS	White Lux	Hazel Lux	Green Lux	Wengè Lux	Dark Grey Lux	Light Grey Lux	
WPC closing cap	AF1313DB	AF1313ND	AF1313VD	AF1313WD	AF1313GSD	AF1313GCD	110x110x43
CLOSING KIT							List code
Closing kit for Vedo Non Vedo DELUXE fencing including: two hooks with screws							KIT-VNV
Features	List code		Dimensions (mm)				
GALVANIZED POSTS							
Galvanized post with doweling plate	AF400Z		Base 100x100x8 - Round holes Tubular 40x40x2,5 - H 1000		For fences height 1000 - 1200 - 1400		
	AF403Z		Base 190X110X8 - Round holes Tubular 40x40x2,5 - H 1200		For fences height 1600 - 1800 - 2000		
Galvanized immersion post	AF404Z		40x40x2 - H 1200				
	AF402Z		40x40x2 - H 1500				
	AF405Z		40x40x2 - H 2000				
Side post	AF407Z		Base 190x110 - Tubular 40x40 - H 1000				
Concave corner post	AF408Z		Double plate 160x100 wall-mounted H1000 and tube 40x40				
Convex corner post	AF409Z		Double plate 160x100 wall-mounted H1000 and tube 40x40				
Tiltable post	AF410Z		100 x 100 x H 1000				
RECOMMENDED POSTS							
VEDO NON VEDO			For fences height 1050 - 1250 - 1450 mm		post 100x100		
VEDO NON VEDO			For fences height 1650 - 1850 - 2050 mm		post 190x100		

The **VEDO NON VEDO** classic, Hazel, Green and wengè remains available until stock depletion.

fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes

Posts

Immersion

Post



Cold-galvanized tube
40x40 th. 2 mm

Heights:

1000 mm
1200 mm
1500 mm

A

Anchor

Post



**SQUARE
BASE POST**

Height 1000 mm

Plate 100 x 100


Hole 12 mm

Hole center 15 mm

Hot-dip galvanized

Tube 40x40 x th. 2,5
mm hot-dip galvanized


Support plate
th. 8 mm



B

Anchor

Post

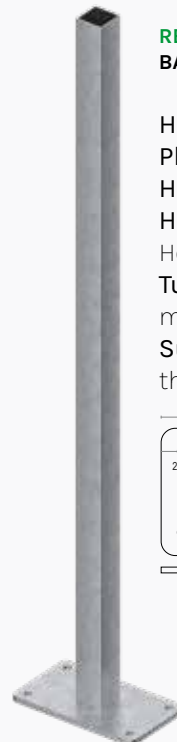

**RECTANGULAR
BASE POST**

Height 1200 mm

Plate 190 x 110


Hole 12 mm

Hole center 20 mm

Hot-dip galvanized

Tube 40x40 x th. 2,5
mm hot-dip galvanized


Support plate
th. 8 mm

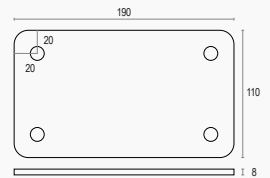

C

Side

Post

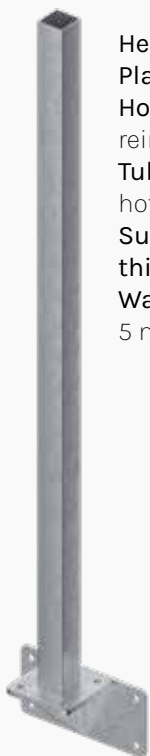

Height 1000 mm

Plate 200x100 mm

Hole 12 mm with central
reinforcement

Tube 40x40 th. 2,5 mm
hot-dip galvanized

Support plate

thickness 8 mm

Wall plate thickness
5 mm

D

Angular

Post



**CONVEX
CORNER POST**

Height 1000 mm

Plate 150x100 mm


Tube 40x40 x th. 2,5
mm hot-dip galvanized

Support base 100x100
x th. 8 mm

E

Angular

Post

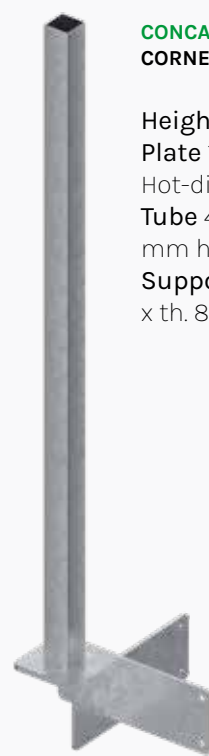

**CONCAVE
CORNER POST**

Height 1000 mm

Plate 150x100 mm

Hot-dip galvanized

Tube 40x40 x th. 2,5
mm hot-dip galvanized


Support base 100x100
x th. 8 mm

F

Galvanized TiltablePost


NEW!

Hot-dip galvanized tube
40x40 th. 2,5 mm
Hole 12 mm
Hole center 15 mm
Plate thickness 8 mm

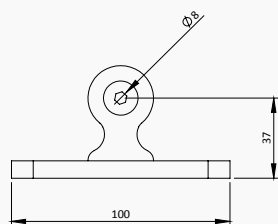


The galvanized tiltable post is used for the **Vedo Non Vedo Deluxe** and **Privacy Deluxe**.


Suitable for maximum inclination of **30°**.

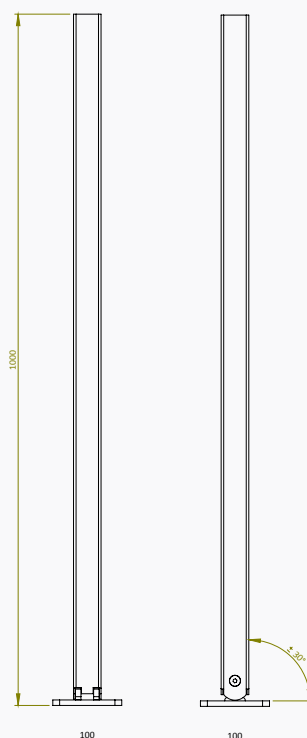

N.B. The WPC column must be cut during installation, based on the necessary inclination.



G

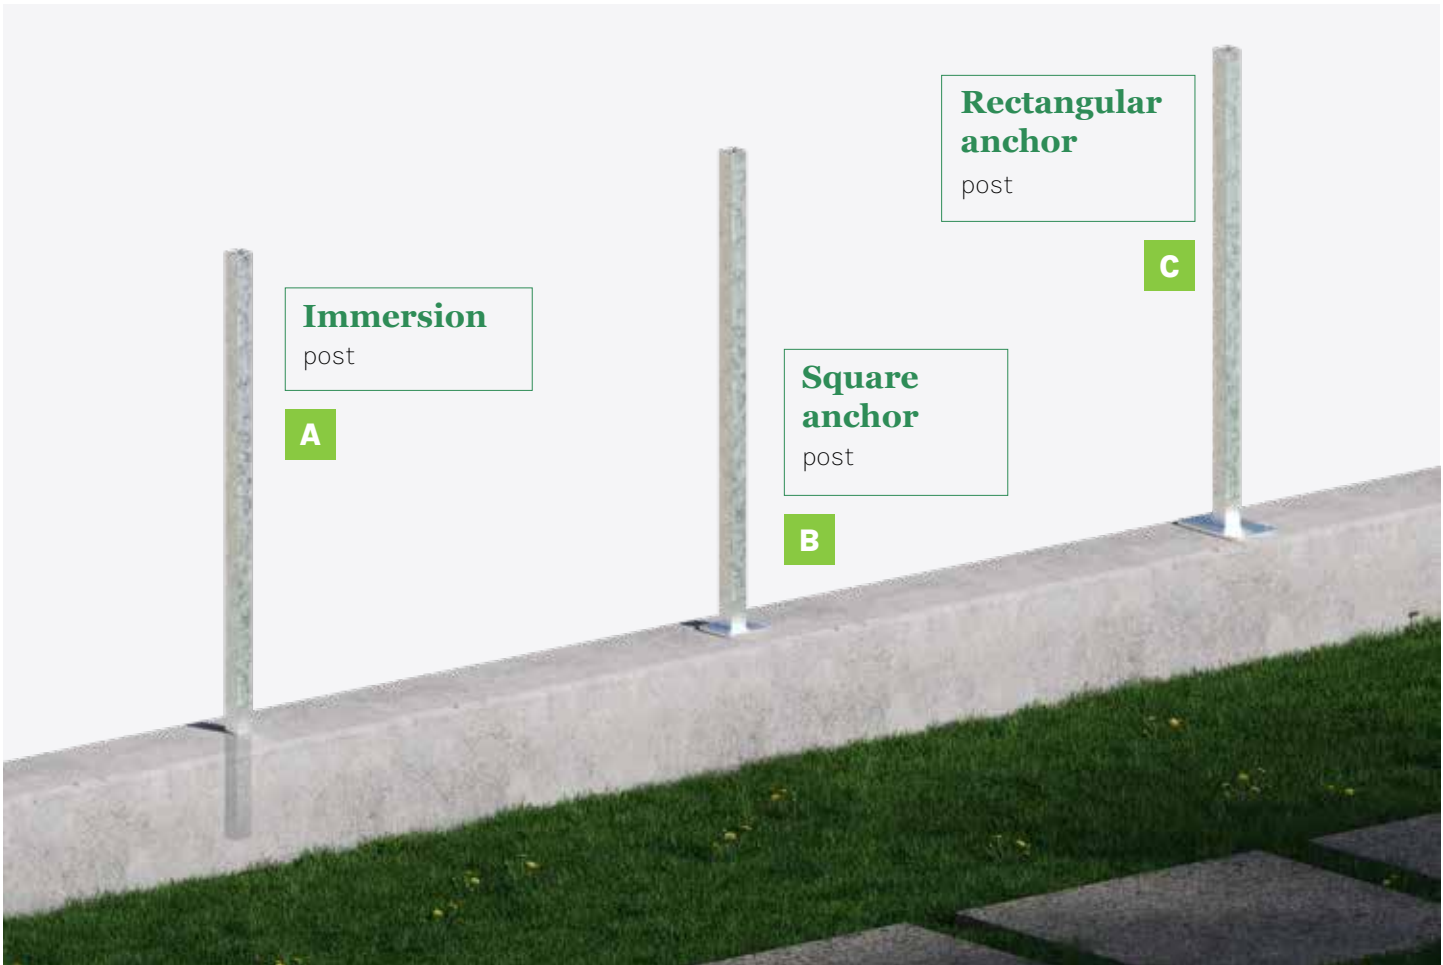



Model Mix

Valid for all models and colors

both standard board size L. 1450 mm

FENCING EXAMPLES

1



column height H 1050mm, spacing 1520mm
4 VEDO NON VEDO slats + 2 PRIVACY slats
with standard 20 mm spacer

2



column height H 1250mm, spacing 1520mm
4 VEDO NON VEDO slats + 3 PRIVACY slats
with standard 20 mm spacer

Co-extrusion makes the fence more durable over time, much easier to clean and suitable for any environment.

MIXED FENCING EXAMPLES



column height H 1450mm, spacing 1520mm
4 VEDO NON VEDO slats + 4 PRIVACY slats
with standard 20 mm spacer



column height H 1650mm, spacing 1520mm
1 VEDO NON VEDO slats + 7 PRIVACY slats
with standard 60 mm spacer



column height H 1850mm, spacing 1520mm
4 VEDO NON VEDO slats + 6 PRIVACY slats
with standard 20 mm spacer





column height H 2050mm, spacing 1520mm
8 doghe VEDO NON VEDO + 4 doghe PRIVACY
with standard 20 mm spacer

01. post installation


INSTALLATION OF **ANCHOR** AND **IMMERSION POSTS**, GALVANIZED AND ALUMINUM

SPACING FOR FENCING


- PRIVACY TREND DELUXE with aluminum post: **1500mm**
- PRIVACY DELUXE with WPC post: **1520mm**
- VEDO NON VEDO TREND DELUXE with aluminum post: **2040mm**
- VEDO NON VEDO DELUXE with WPC post: **2060mm**

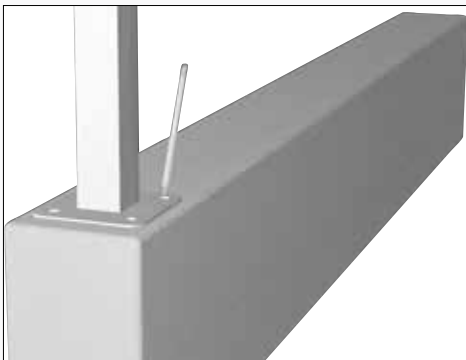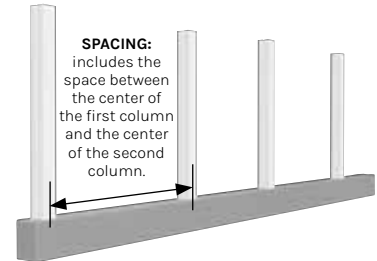


Place the initial post on the base and mark the holes on the concrete slab or curb.

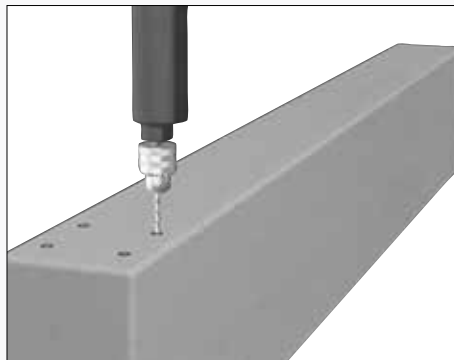

Drill the holes.

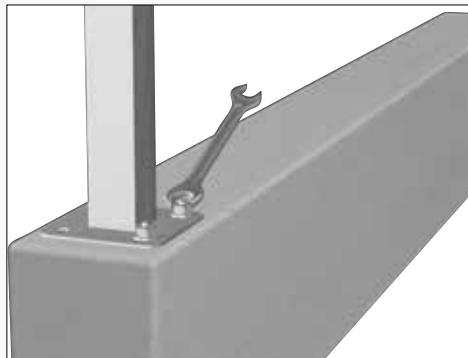

Place the galvanized post and fix it.

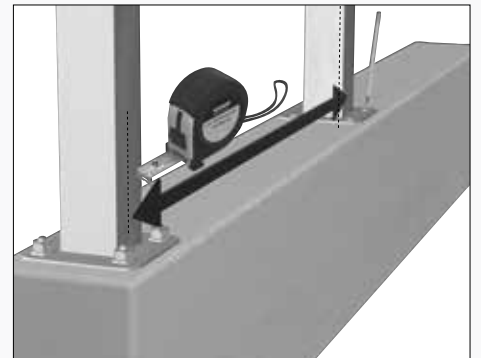


Measure the position of the next galvanized post (from column center to column center).



DO NOT INSTALL ALL POSTS!

Proceed progressively to correct any calculation errors.

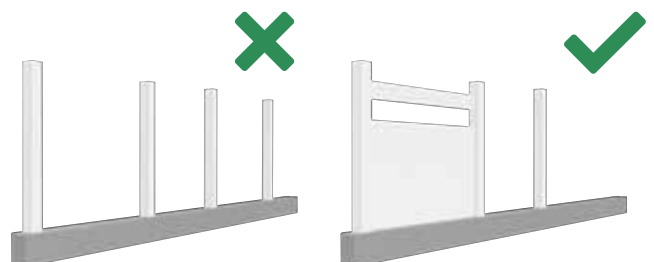


02. slats installation




If the spacing has been respected, there will be 5mm space on both sides between the end of the slat and the columns, so as not to damage the structure in case of thermal expansion of the WPC Bamboo boards.

VALID FOR ALL TYPES OF FENCING, INCLUDING THOSE SUBJECT TO POSSIBLE MODIFICATIONS.

SLAT INSTALLATION - **PRIVACY TREND DELUXE** AND **PRIVACY DELUXE**

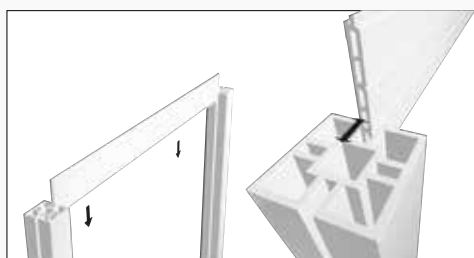


Insert "Privacy" slats by inserting them from above into the WPC column groove.

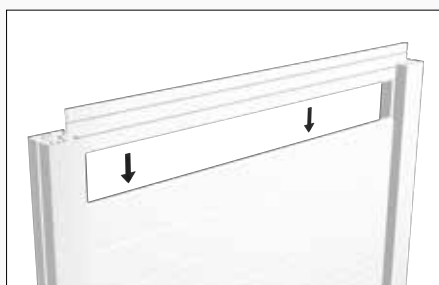


Insert the finishing slat last.


SLAT INSTALLATION - **VEDO NON VEDO TREND DELUXE** AND **VEDO NON VEDO DELUXE**

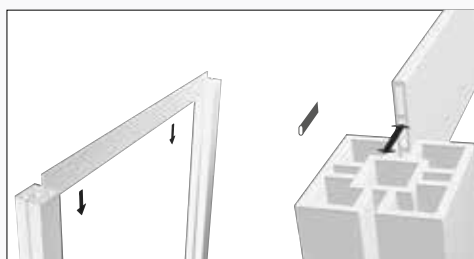

Insert "Vedo non vedo" slats with the reinforcement core (20x10 mm cold galvanized) by inserting them from above into the slot of the WPC column.

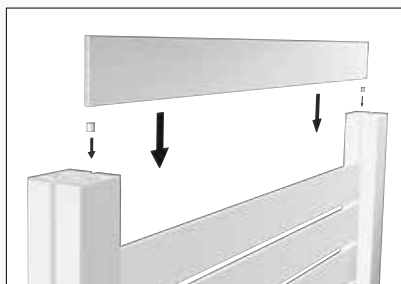

Between one slat and another, spacers must be inserted by threading them from above into the channels of the column.

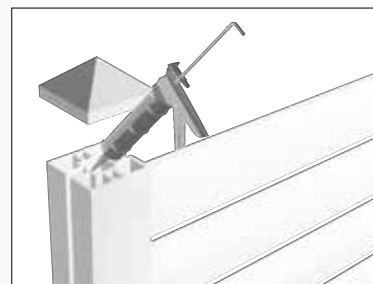

Close the top of the column with a closure cap with screws or two-component epoxy glue.



VIDEO
**PRIVACY
TREND DELUXE**



VIDEO
**PRIVACY
DELUXE**



VIDEO
**VEDO NON VEDO
TREND DELUXE**



VIDEO
**VEDO NON VEDO
TREND DELUXE**

03. closure kit

CLOSURE KIT INSTALLATION - **PRIVACY LINE**



Insert the reinforcement core in the upper part of the beveled privacy slat.



Position the closure kit in the upper part and fix with the screw in the reinforcement core.



Insert kit and slat into the post, adjusting the position.



Insert the kit on both sides of the slat.



Insert the kit completely.



Proceed with inserting the cap.

CLOSURE KIT INSTALLATION - **VEDO NON VEDO LINE**



Position the closure kit in the upper part and fix with the screw in the reinforcement core.



Insert kit and slat into the post, adjusting the position.



Insert the kit on both sides of the slat.



Insert the kit completely.



Proceed with inserting the cap.

flooring


WPC Bamboo provides a **pleasant sensation of warmth and comfort**, as well as the ability to resist water wear. This makes it the ideal material for **coverings surrounding pools**, unlike wood, which tends to change its technical characteristics, WPC Bamboo has a particularly smooth surface without splinters and therefore walkable barefoot.

Classic

Professional

For docks

flooring

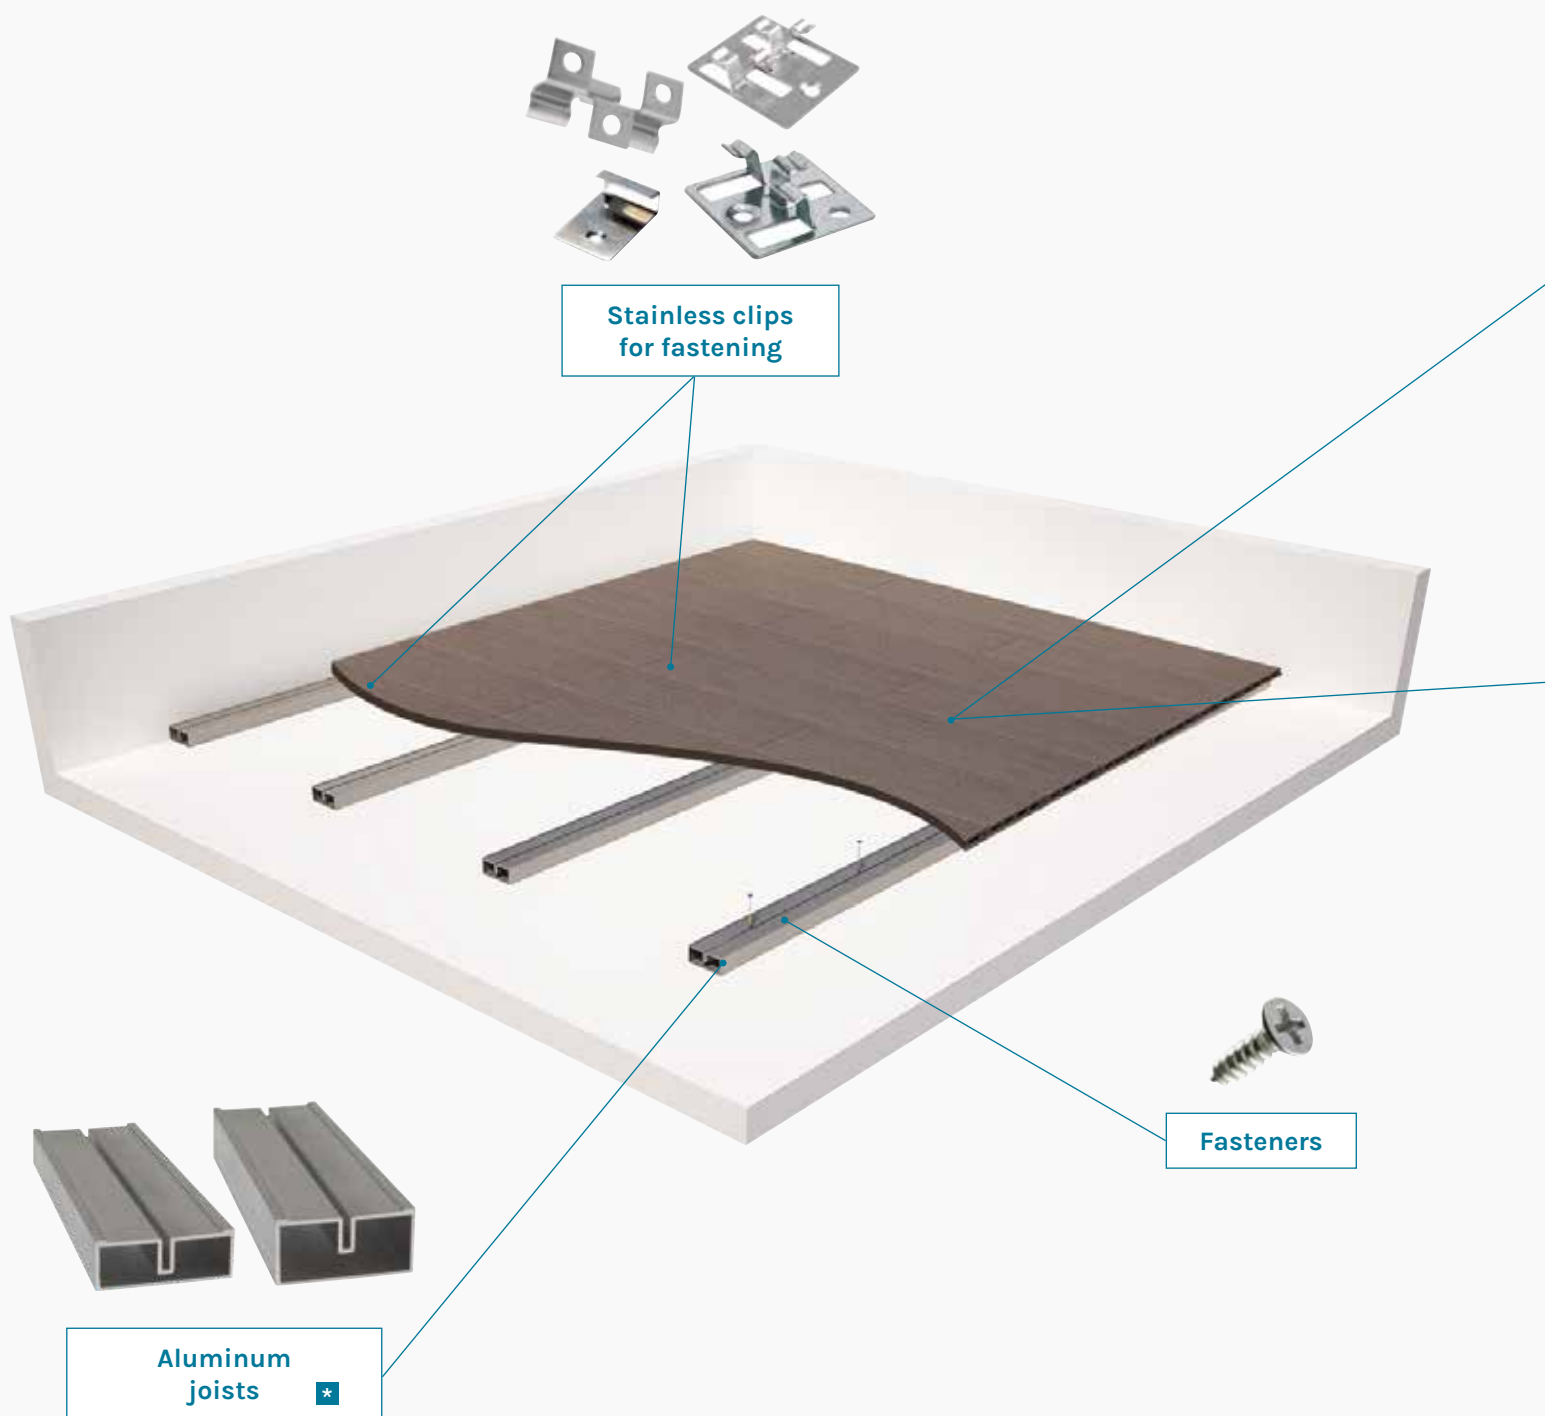

* anodized aluminum on request

EXAMPLE MATERIAL DEVELOPMENT PER SQ M OF FLOORING

Joist art. AF501 ml n° 3 per sq m
Clips art. AF601 pz. n° 21 per sq m
Start clips art. AF602 pz. n° 2 per sq m
Galvanized steel screws for clips art. AF701 pz. n° 23 per sq m

components flooring



**Classic Bamboo
Flooring Slat**

The proposal of a classic floor with the characteristic of being double-sided. You can thus choose, in addition to the various colors available, which side of the slat to use: the lines are wide on one side and narrower on the other. Product made from bamboo fiber.




**Professional Co-extruded
Flooring Slat**

It is a co-extruded product coated with technologically advanced polymers. Suitable for any type of flooring, it is the ideal choice for areas most subject to resistance tests. Product made from bamboo fiber.



DIFFERENCES BETWEEN
wpc professional
AND **wpc classic**

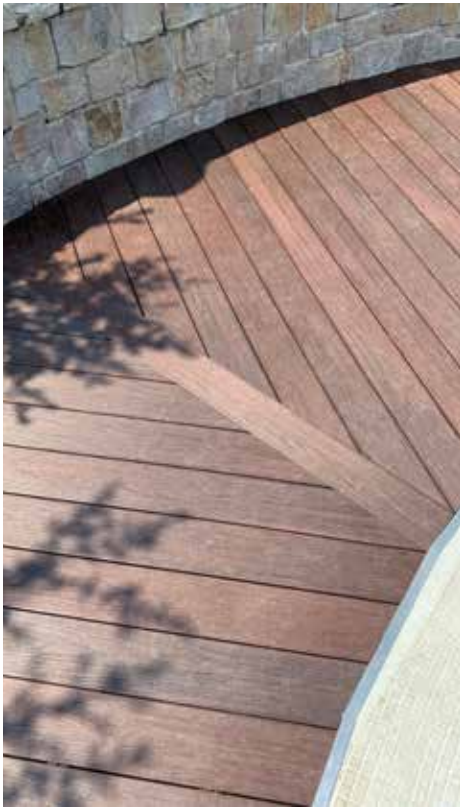

Latest generation **WPC professional Co-extruded:**

- WPC professional maintains the advantage of WPC classic but is **much easier to clean**, which means **less maintenance** and also **scratches less easily**
- Any **stain** or **external residue** can be easily removed from the surface as **it is not absorbed**
- IT IS **100% waterproof** and prevents the formation of any mold or cracks
- It is not necessary to intervene immediately to clean any oil or coffee stains etc.
- The color changes slightly over the years, but the change is not perceptible to the human eye
- It is much **more water-repellent**

WPC classic Mono extrusion:

- More **natural effect** to the eye and more similar to wood
- If WPC classic requires immediate cleaning to avoid creating stains
- In certain installation areas there could be mold formation (which can be removed with pressure washer and simple bleach)
- The color changes by 20% after installation
- It is **less water-repellent**



Classic

Pavimento double-face righe larghe e strette
facile da installare e resistente

PRICE LIST CODES

Features	Price list codes and colors					Dimensions (mm) L x H x Th.
	Ice	Grey	Wengé	Hazel	Chestnut	
CLASSIC WPC BAMBOO SLATS						
Classic flooring slat	AF201GD	AF201GR	AF201WD	AF201ND	AF201CD	2200x140x25
FLAT AND ANGULAR PROFILES						
ANGULAR - Smooth effect	AF800-1GD	AF800-01GR	AF801-1WD	AF802-1ND	AF803-1CD	2200x40x40
FLAT - Line effect on both sides	AF804-1GD	AF804-1GR	AF805-1WD	AF806-1ND	AF807-1CD	2200x72x11

[Mounting accessories page 65](#)



Double-face flooring slat
with one side with wide lines and one side with narrow lines




Corner profile smooth effect (40x40)




Profile with line effect both sides (72x11)

Available colors for slats and profiles *


Ice

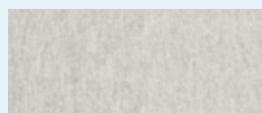

Grey

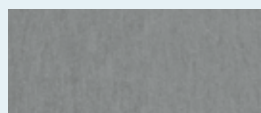

Wengé

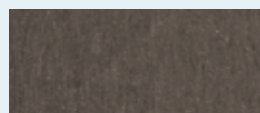

Hazel



Chestnut



*Actual colors may differ from those shown, color samples may be requested *




Professional

Flooring made with two colors for maximum environmental customization

PRICE LIST CODES

Features	Price list codes and colors				Dimensions (mm) L x H x Th.
PROFESSIONAL SLATS	White marble/ Dove grey	Light Grey/Asphalt	Terracotta/ Savannah	Green/ Blue	
Professional slat	AF250P-BT	AF250P-GA	AF250P-TS	AF250P-VA	2200x138x23
PROFILE	White marble	Dove Grey	Light Grey	Asphalt	
Flat profile for professional flooring	AF251P-BM	AF251P-T	AF251P-GC	AF251P-A	2200x100x12
	TerraCotta	Savannah	Green	Blue	
	AF251P-TC	AF251P-S	AF251P-V	AF251P-AZ	
ANGULAR PROFILE	White marble	Dove Grey	Light Grey	Asphalt	
ANGULAR - Wood effect	AF251A-BM	AF251A-T	AF251A-GC	AF251A-A	2200x45x45
	Terracotta	Savannah	Green	Blue	
	AF251A-TC	AF251A-S	AF251A-V	AF251A-AZ	

Mounting accessories page 65

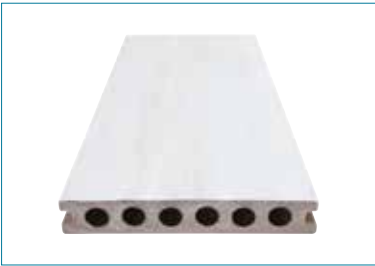


Professional flooring slat
two-color wood effect



Professional flooring profile
wood effect



Corner profile for
professional flooring



Interior: WPC Bamboo
Exterior: High-density resistant polymer

Available colors for **slats** *

White marble/Dove Grey



Light Grey/Asphalt



Terracotta/Savannah




Green/Blue



Actual colors may differ from those shown, color samples may be requested *

TECHNICAL DRAWINGS

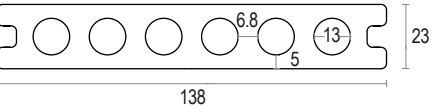

**Professional flooring slat
wood effect**

* Co-extrusion tolerance +1mm -0,5mm

PRICE LIST CODES

Features			Dimensions (mm) L x H x Th.
DOCK SLATS	Hazel	Chestnut	
Dock slat, thicker than classic flooring slat	AF210ND	AF212CD	2200x150x35

Dock slat with narrow lines on both sides



Available colors for **slats** *

Hazel



Chestnut



Actual colors may differ from those shown, color samples may be requested *

Mounting Accessories

Classic - Professional Flooring

PRICE LIST CODES

Features	List codes	Dimensions (mm) L - B x H x Th.
FIXING JOIST		
Aluminum joist	AF501	L 2200 50x25x2
Aluminum joist	AF503	L 2200 50x15x2
CLIPS FOR FIXING		B x H x Th.
Stainless steel 304 clip for Classic flooring	AF601	40x26x12
Start clip in stainless steel 304 for Classic, Professional flooring	AF602	25x25x11
Clips for Professional flooring	AF604	34x40x9
Clips for Classic flooring ABS	AF605	50x15x20
Clips for Professional flooring ABS	AF606	38x12x15
Clip for Classic flooring stainless double use	AF607	40x45x6
Clip for Professional flooring stainless double use	AF608	45x45x8
FASTENERS		
Stainless steel 304 screw	AF701	3,5x13



Joists



Fasteners



ABS clip AF605 - AF606 used to facilitate board replacement



Clip AF601 for Classic flooring



Start clip AF602 for Classic and Professional flooring




Clip AF604 for Professional flooring




Clip AF607 for Classic flooring and Clip AF608 for Professional flooring stainless double use

TECHNICAL DRAWINGS



Clip AF607 for Classic flooring double use



Clip AF608 for Professional flooring double use

Flooring Supports

TECHNICAL INFO


Specific supports for joists and WPC bamboo flooring installation

WHAT SPACING SHOULD I USE WITH SUPPORTS?

With decking installation, the spacing between one joist and the next and between one support and the next is not determined by the load capacity of the supports but by the finished floor that will be laid. The final decision is influenced by the type of essence used, the thickness of the joist and final boards. For further clarification, consult the WPC Bamboo flooring manufacturer.


Advantages

- Perfect flatness of final flooring
- Passage of systems under the floor
- Recovery of floors with various heights
- Easy inspection and maintenance of waterproofing without demolition

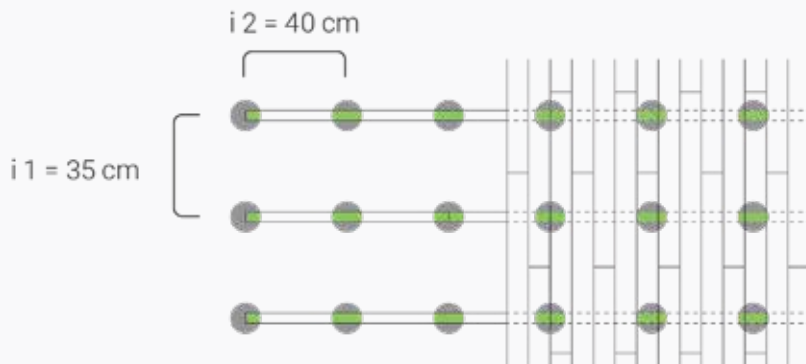

1 : i1 : i2

		i 2				
		cm	35	40	45	50
i 1	35	8,20				
	40		6,20			
	45				5,0	
	50					4,0

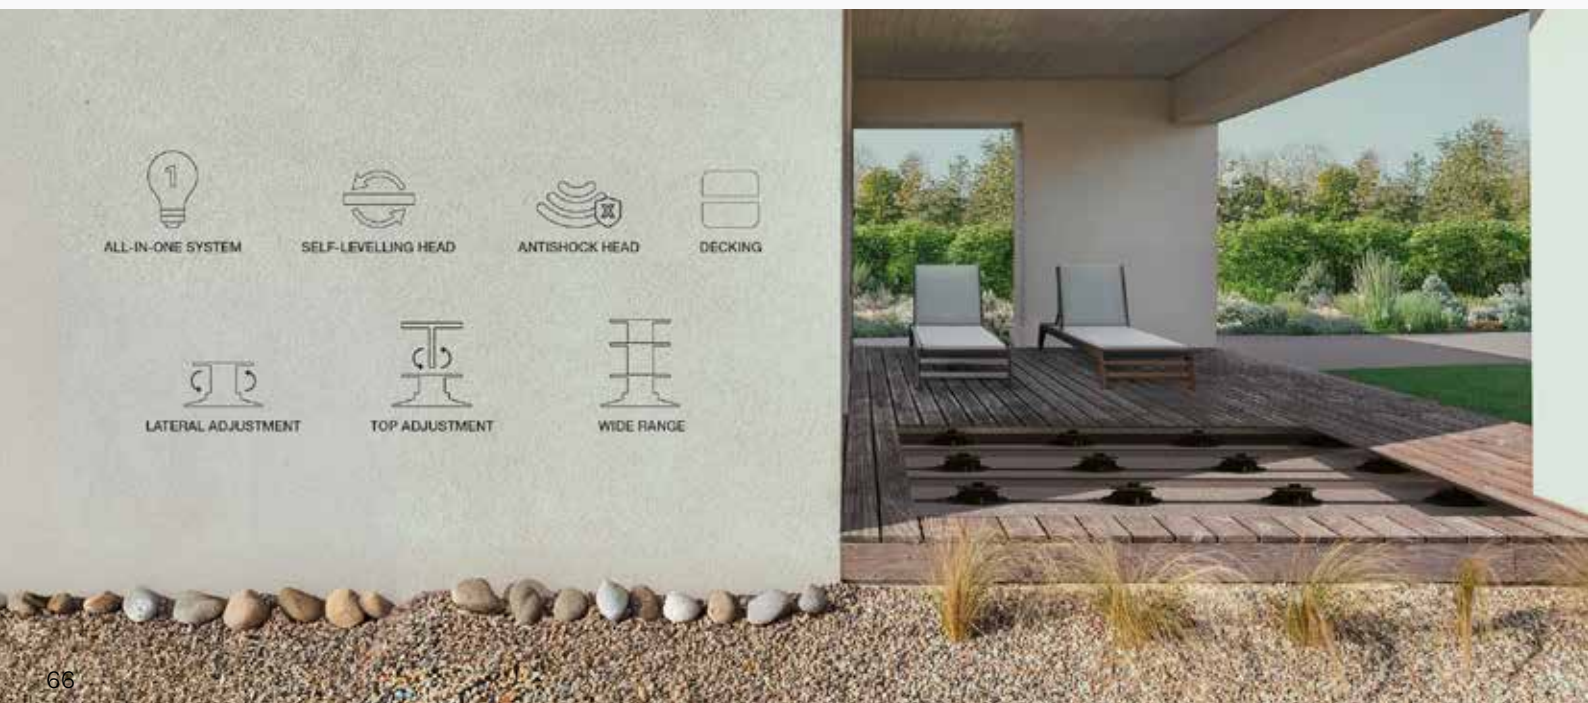



Caratteristiche e misure	Price list codes
PrimeUp h 10-15	AF1500



Features and measurements	Price list codes
PrimeUp h 10-20	AF1501



Features and measurements	Price list codes
PrimeUp h 10-25	AF1502




Features and measurements	Price list codes
PrimeUp h 25-40	AF1550



Features and measurements	Price list codes
PrimeUp h 40-60	AF1551



Features and measurements	Price list codes
PrimeUp h 60-100	AF1552



Features and measurements	Price list codes
PrimeUp h 100-180	AF1553

SPECIFIC SUPPORTS FOR JOISTS AND WPC BAMBOO FLOORING INSTALLATION

The material with which the supports are produced makes them resistant to acid and basic solutions and atmospheric agents.

The excellent resistance to temperature changes allows them to be installed at temperatures from 0° to 40°.

LUNAR SUPPORT EXTENSIONS


Features and measurements	Price list codes
Extension PSL20	AF1554





Features and measurements	Price list codes
Extension PSL80	AF1555




01. JOIST

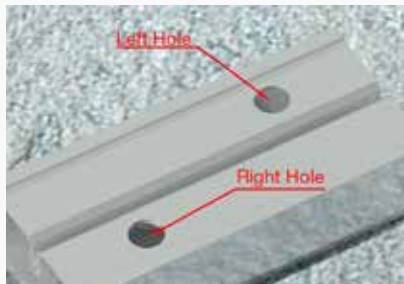

Representative image, alternate the holes to the right of the central axis of the joist. The optimal longitudinal distance of the holes is 525 mm.

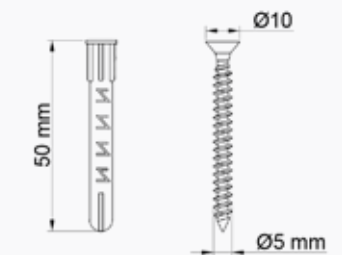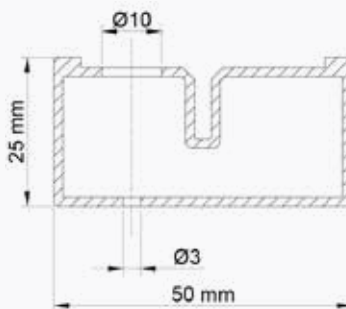


20 X DOWEL 6x30/50

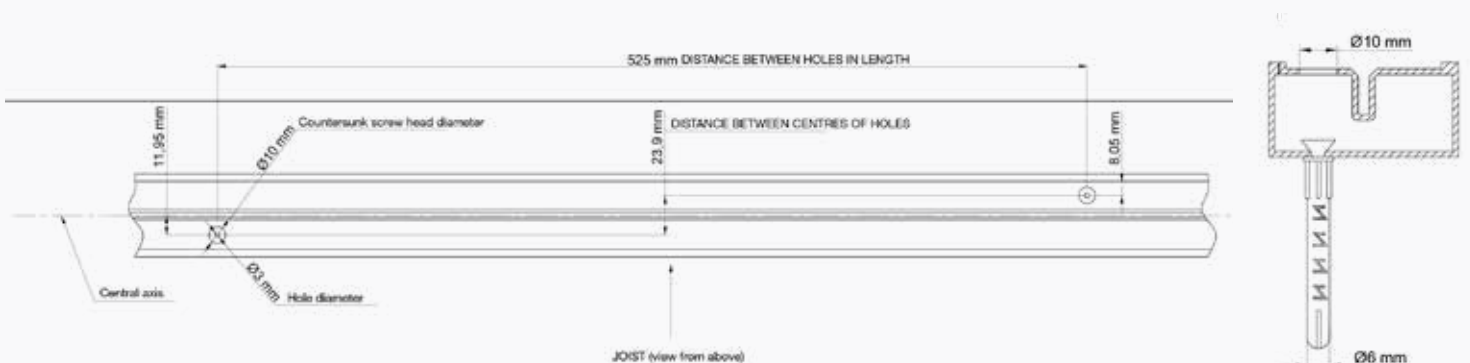


02. START CLIPS




1) Position the start clips by matching the clip hole with the joist slot

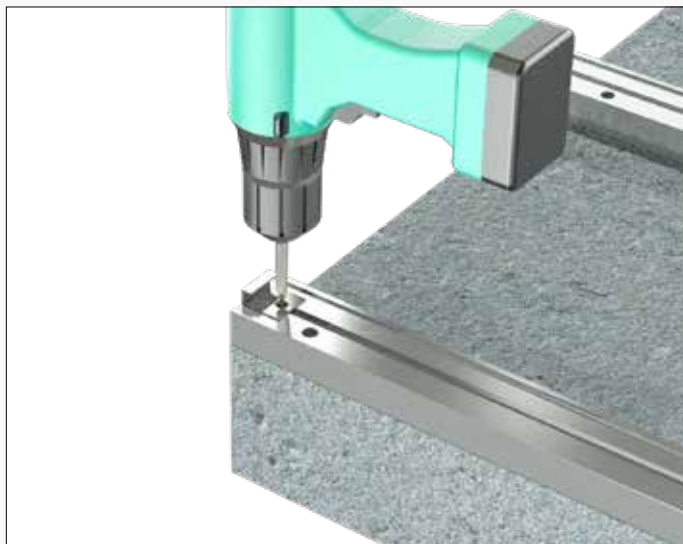

2) Apply the screw to the clip fixing it to the joist

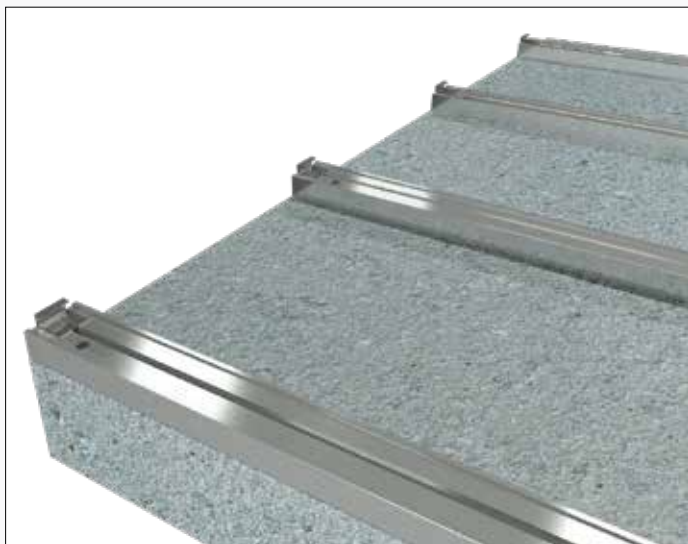

3) Final result

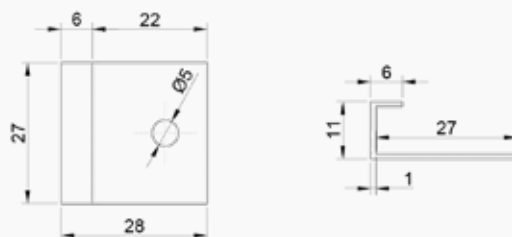

START CLIP (dimensions in mm)

Flooring Installation Classic and Professional


03. FIRST SLAT INSTALLATION



1) Position the slat transversely to the joists and push it until reaching the "start clips"



2) Match the slat slot with the "start clips"

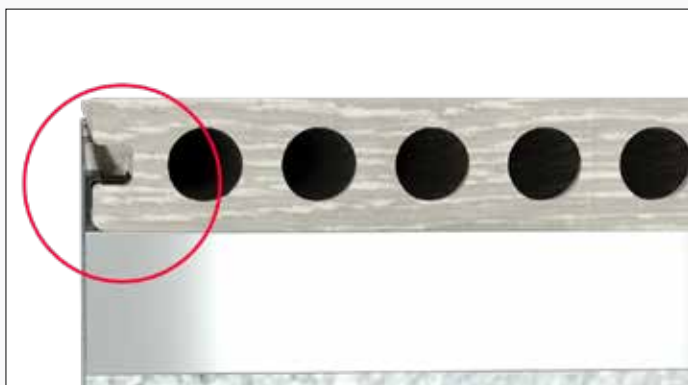

Final result



3) Correct installation of the first slat from the "start clips"


04. CLIP INSTALLATION



1) Insert the steel clips on the joist and bring it close to the slat




2) Screw the steel clip

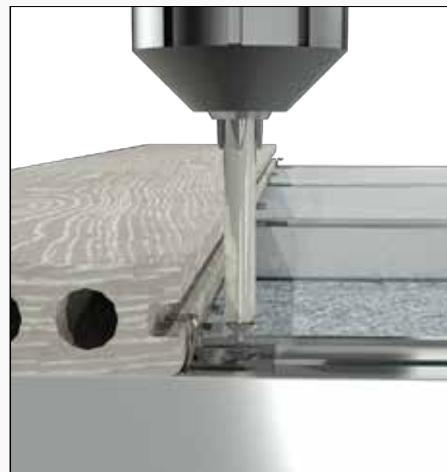


3) Make sure the clips are adhering to the slat



4) In case it is necessary to join two or more slats, make the joint exactly at the center of the clip

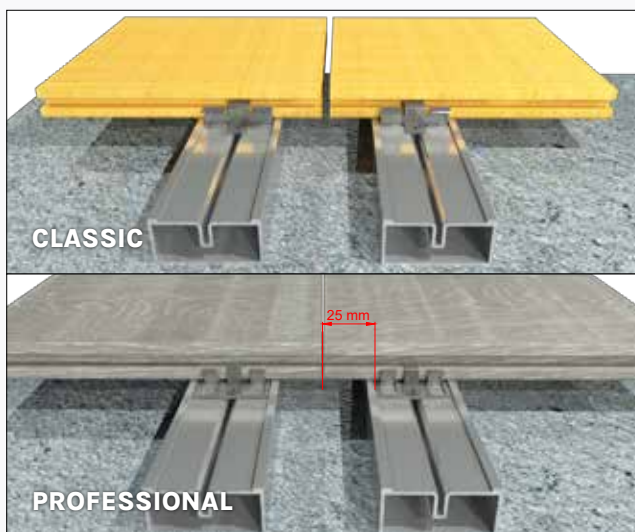

5) Installation example to fix the same slats in a case other than the previous figure

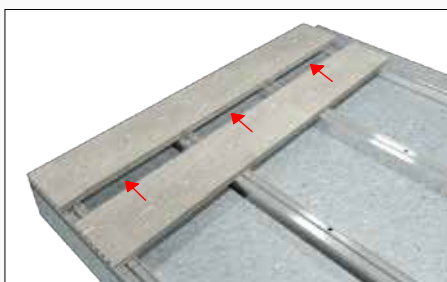

6) Lay the second slat parallel to the first and insert it into the clips




7) Installation of two slats

Flooring Installation Classic and Professional

05. SLAT FASTENING




1) Carry out the same procedure until the end of the supplied slats

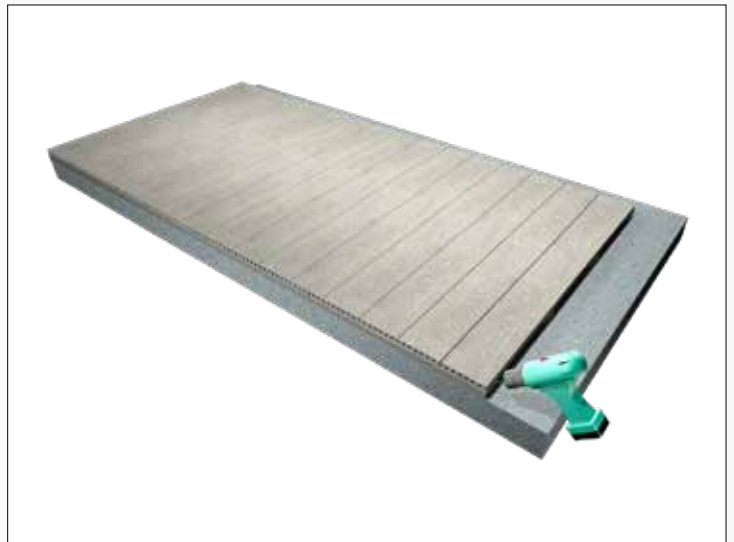

2) Drill the slot of the last slat and joist with an inclination greater than 45 degrees with a 3mm wood bit




3) Detail of joist drilling and slot of the last slat

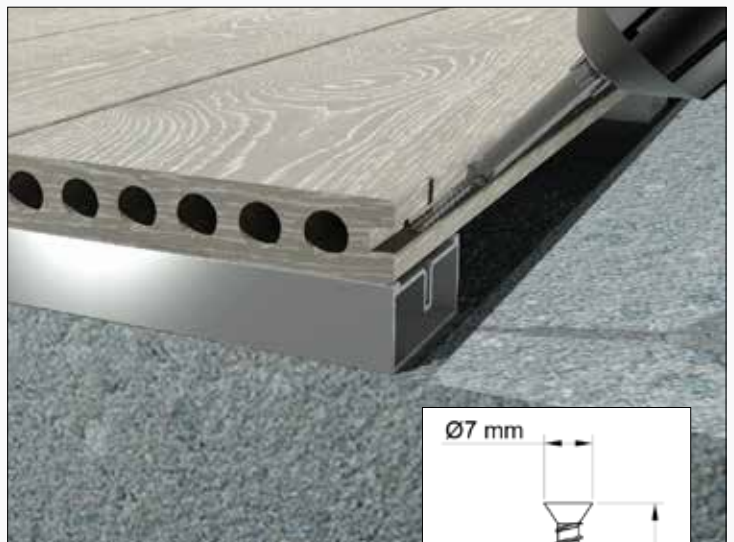

4) Insert the locking screw in the just created hole


Locking screw for last slat
4x50 mm

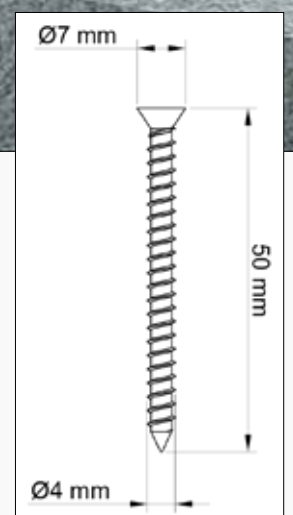

06. CORNER PROFILE INSTALLATION




1) Cut all corner profile ends at 45 degrees

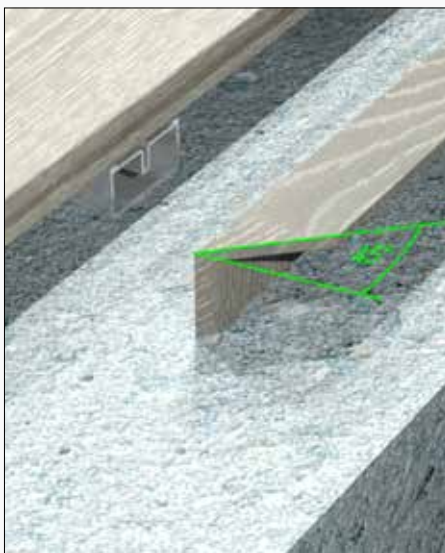

2) Appearance of the corner profile after cutting



3) Apply the first corner profile (short side) making it match correctly to the slat

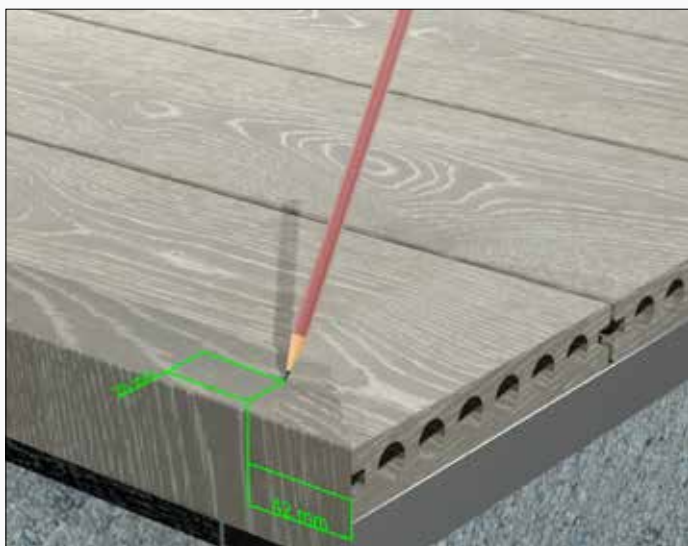

4) Mark the point to be drilled with a pencil, the measurements are purely indicative



5) Drill with a 3 mm wood bit, to a depth of 25 mm

Flooring Installation Classic and Professional


06/1. CORNER PROFILE INSTALLATION



6) Insert the screw in the just created hole, remembering to use the plastic washer supplied




7) Carry out drilling and screwing work every 254.5 mm

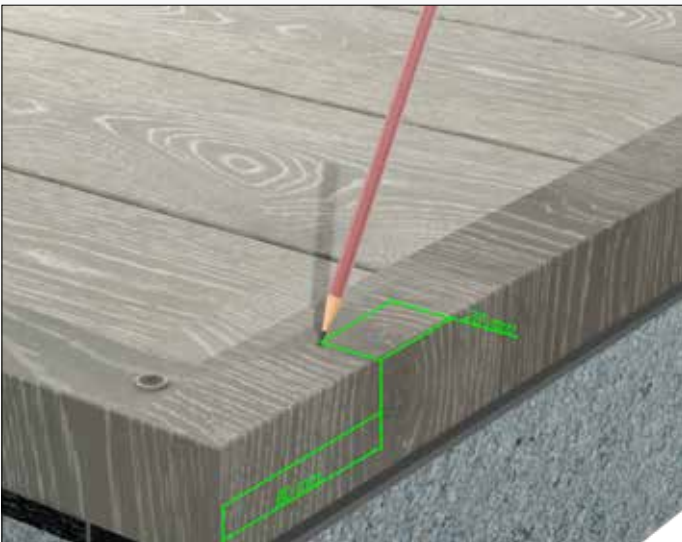

8) Apply the second corner profile (long side) and make sure it matches the first corner profile laid. Measurements purely indicative.




9) Drill with a 3 mm wood bit

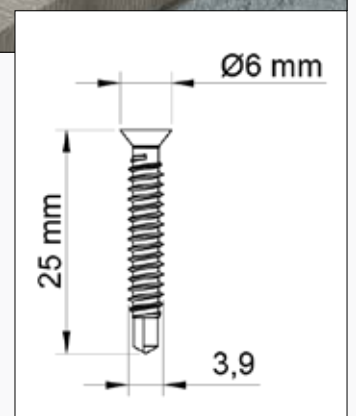

Screw to use for
corner profile fastening

06/2. CORNER PROFILE INSTALLATION

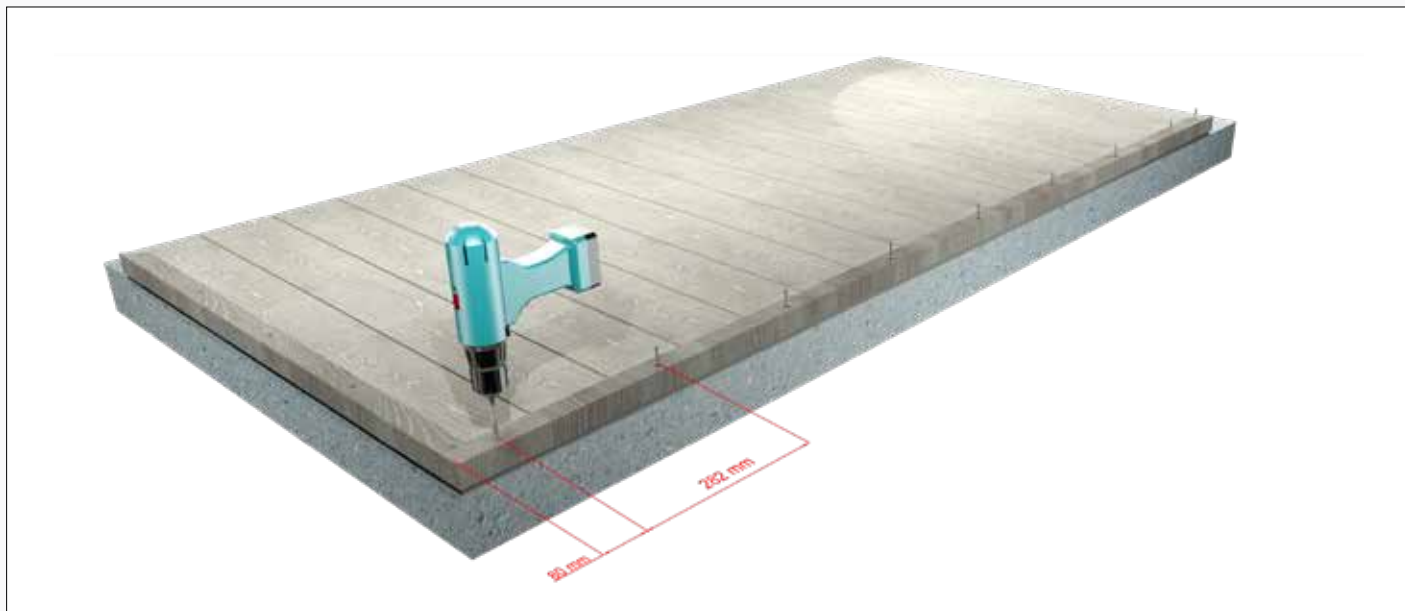

10) Carry out drilling work (3 mm bit) and screwing on the entire "long" corner profile approximately every 282 mm. Remember to always apply the supplied plastic washers.




11) Perform the same work as the first two corner profiles, on the two remaining ones.


Installation on Unstable Surface

Classic and Professional

01. ADJUSTABLE SUPPORTS

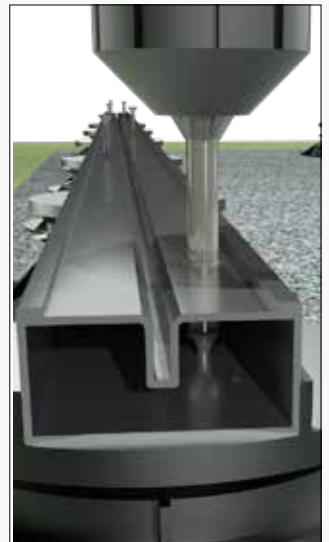

1) Drill at a certain distance of 350 mm, always alternating the holes to the right and left with respect to the central axis, the upper face of the joist with a 10 mm metal bit, the lower face with a 3 mm bit, after which insert a 25 mm screw to fix the joist itself.

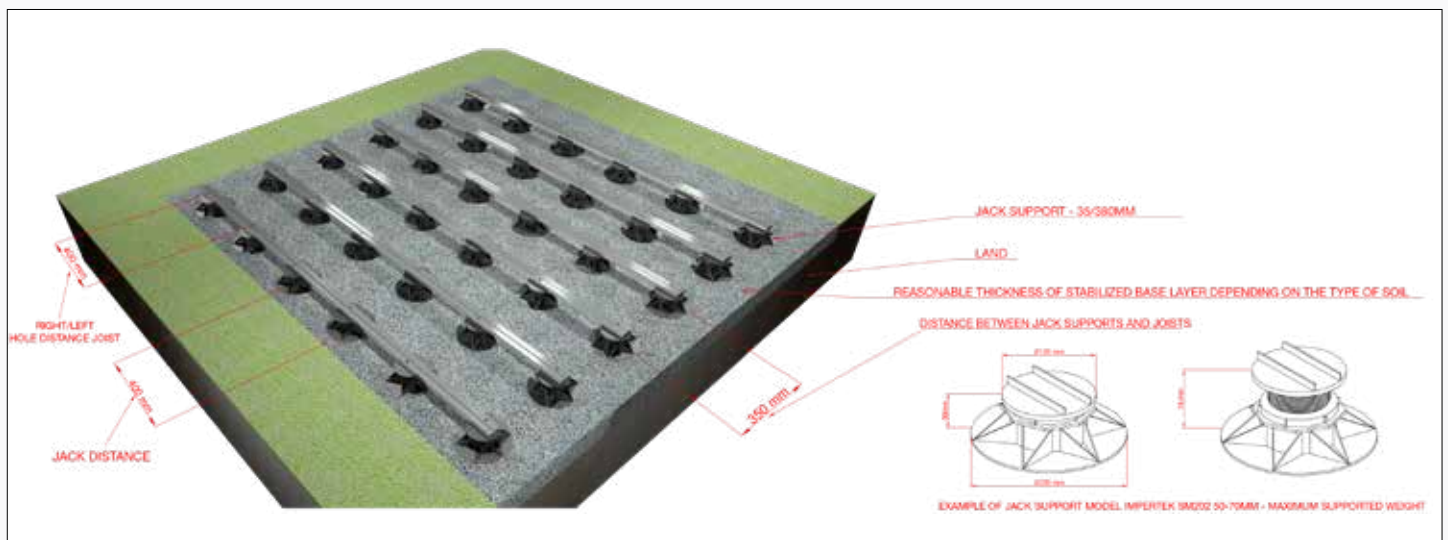

2) Complete installation.


02. UNSTABLE SURFACE WITH CEMENT PLATE AND DOUBLE JOIST



1) Drill at a distance of 525 mm, always alternating the holes to the right and left with respect to the central axis (FIGURE 1), the upper face of the joist with a 10mm metal bit, the lower face with a 3mm bit, after which insert the dowel in the cement plate and fix the joist. Suggested 50mm screw

2) After laying the lower joists, fix the upper ones by pre-drilling the upper face of the joist itself with a 10mm metal bit and the lower one with a 3 mm bit

3) Fix the upper joist, use 25mm screw

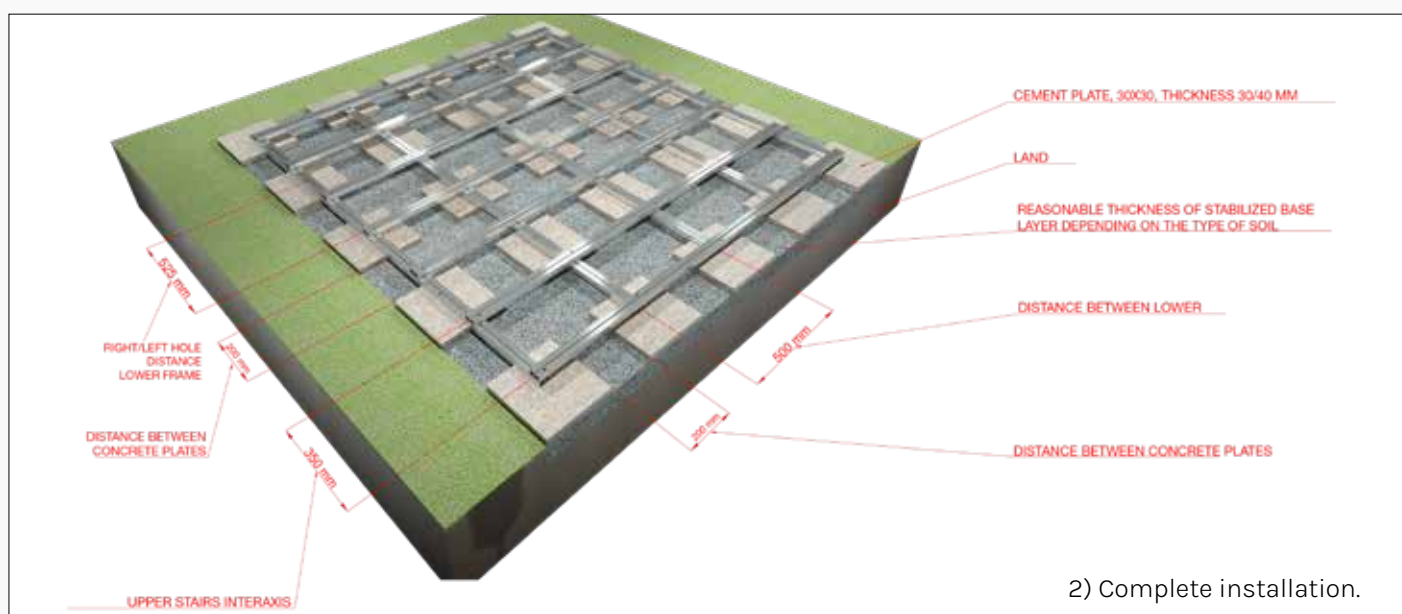

2) Complete installation.

cladding

Bamboo coverings suitable for all exteriors. It gives elegance and personality to the home with composite **wood cladding in bamboo fiber**. Suitable for every facade of the house, resistant to atmospheric agents and easy to clean.


Classic

Professional

Grecato

Grecato Large

cladding

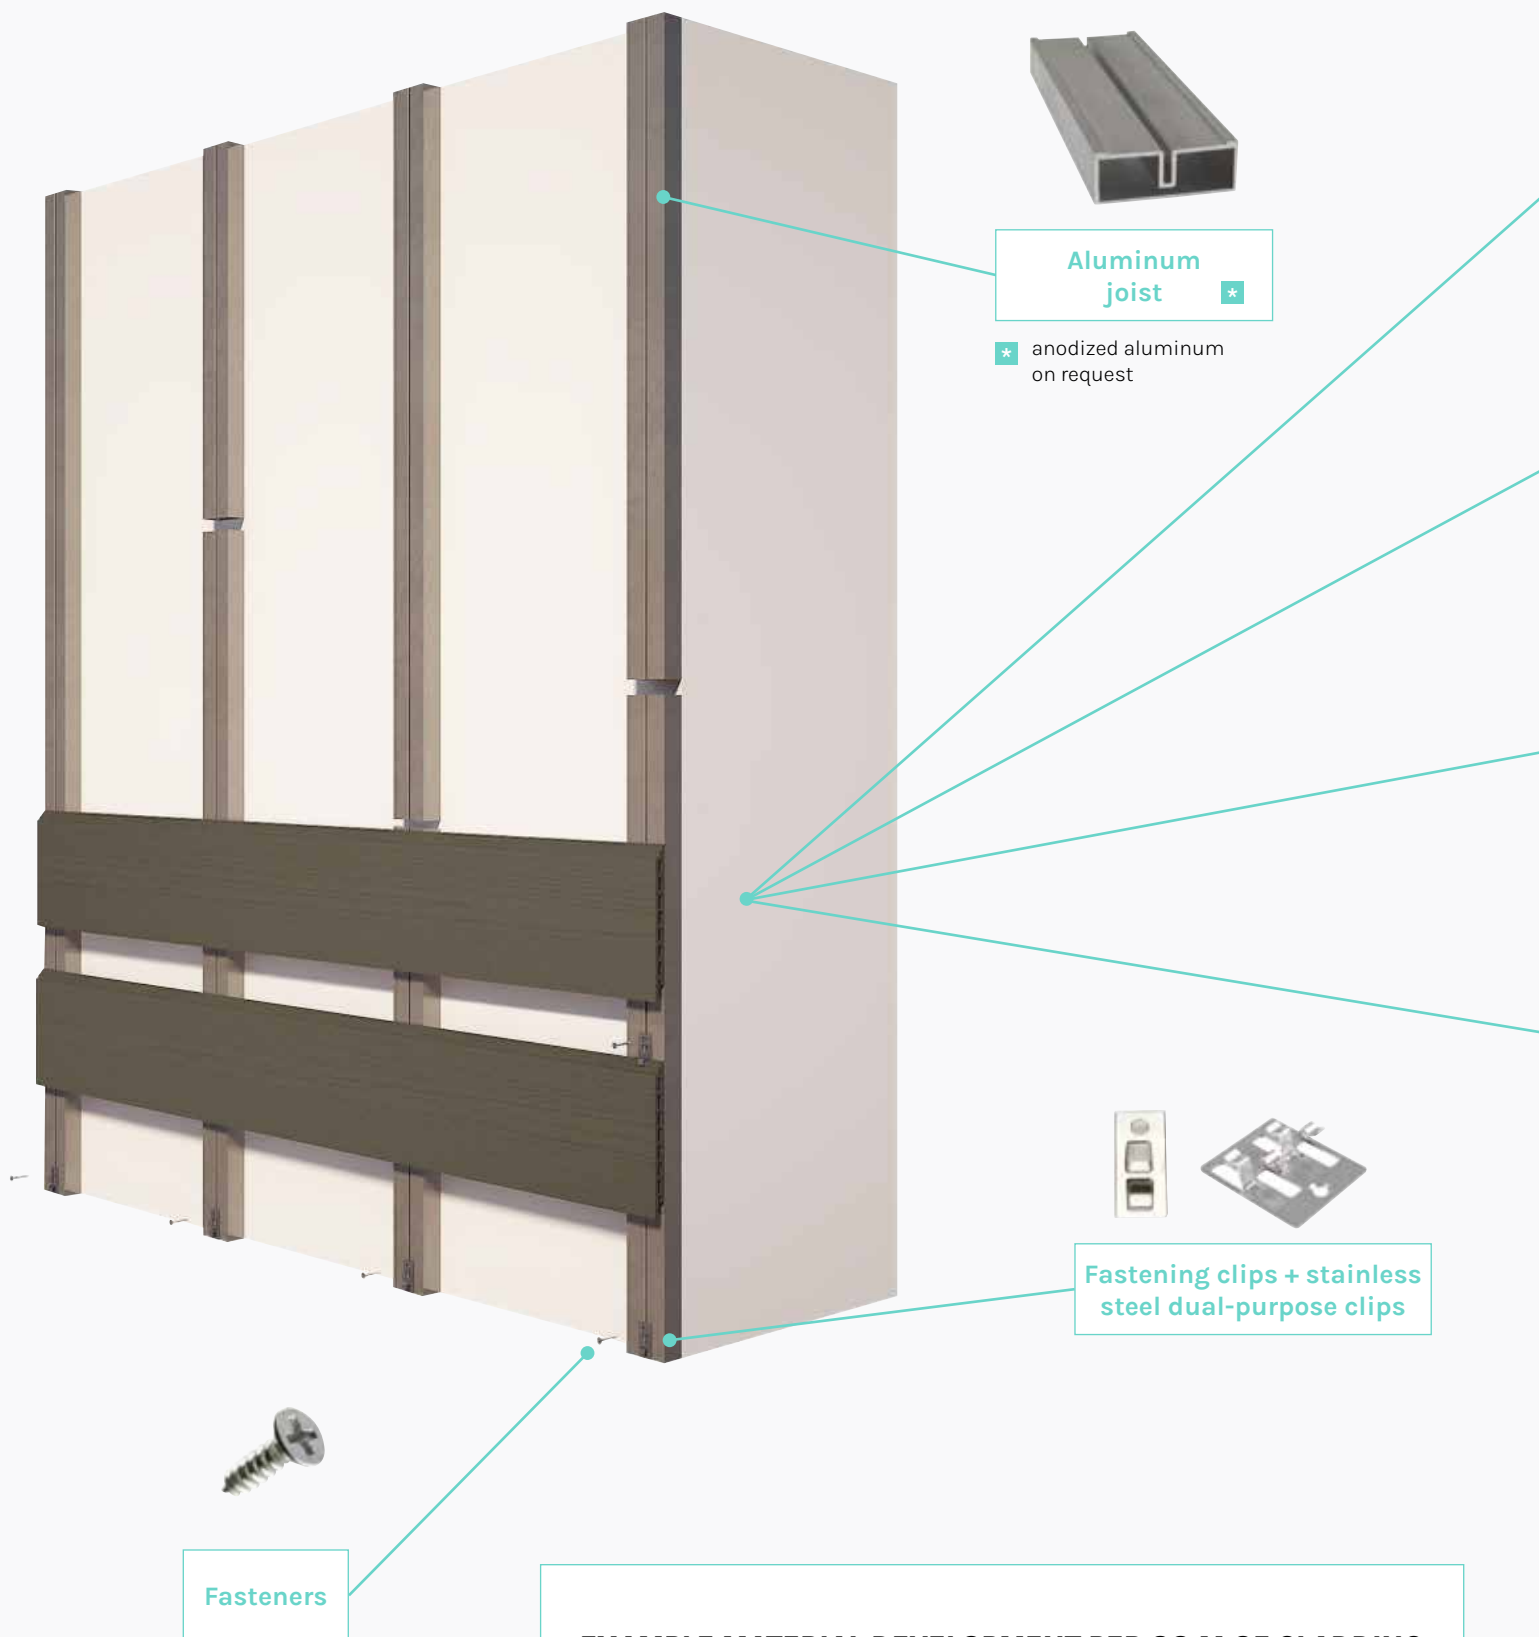

EXAMPLE MATERIAL DEVELOPMENT PER SQ M OF CLADDING

Joist art. AF503 ml n° 3 per sq m

Clips art. AF603 pz. n° 23 per sq m

Galvanized steel screws for clips art. AF701 pz. n° 23 per sq m

components

cladding



**Classic
Cladding Slat**

Classic cladding is an article made by mono-extrusion with visible wood-effect grain. The cladding is not double-sided and is not suitable for thermal insulation use. Suitable for purely aesthetic purposes.



**Professional Co-extruded
Cladding Slat**

Cladding with technological innovations specially designed to make the article more resistant and modern than the classic slat. It does not deteriorate over time, does not lose color and is ideal for any environment.



**Grecato Co-extruded
Cladding Slat**

Like the Professional slat, Grecato co-extruded cladding is resistant and made with new material technologies. Suitable for cladding different types of environments, this article stands out for its modern and design aesthetic line.



**Grecato Large
Cladding Slat**

Like the Professional slat, Grecato Large co-extruded cladding is resistant and made with new material technologies. Suitable for cladding different types of environments, this article stands out for its modern and design aesthetic line.





Classic

Classic cladding
with visible wood-effect grain

PRICE LIST CODES


Features	Price list codes and colors					Dimensions (mm) L x H x Th.
	Ice	Grey	Wengé	Hazel	Chestnut	
CLADDING SLATS						
Classic outdoor cladding	AF302GD	AF303GR	AF304WD	AF306ND	AF308CD	2900x152x12
CORNER PROFILE						
CORNER - Smooth effect	AF800GD	AF800GR	AF801WD	AF802ND	AF803CD	2900x40x40

Mounting accessories page 90




Cladding slat
wood effect

Corner profile smooth
effect (40x40)

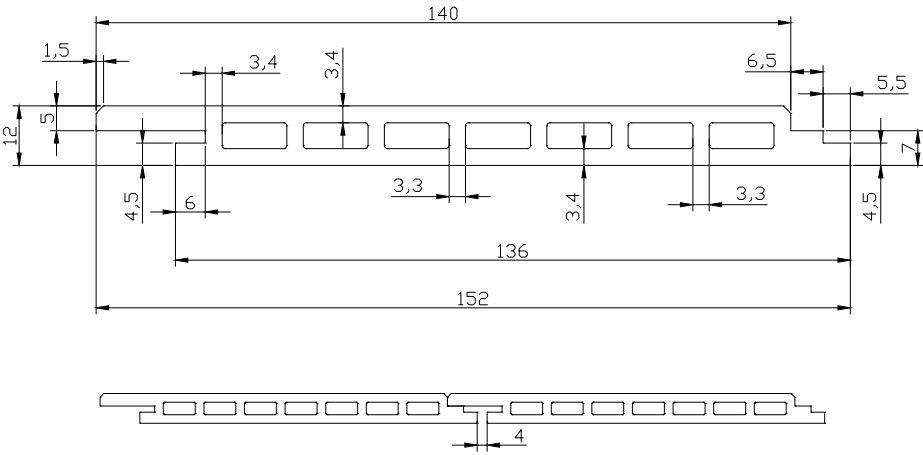

Available colors for slats and profiles *

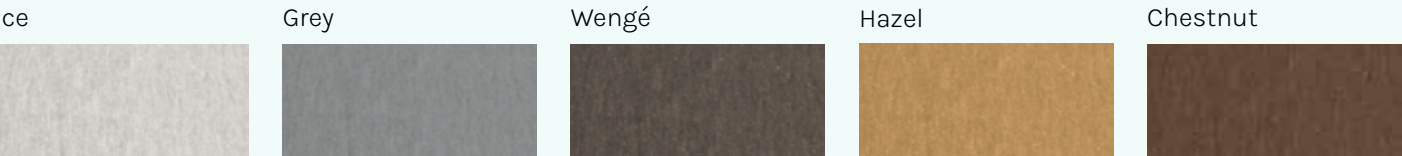

Actual colors may differ from those shown, color samples may be requested *



Professional

Modern and linear cladding
for wood effect coverage



Professional Grecato

Coverage with typical
Greek-shaped finishing

professional grecato cladding


PRICE LIST CODES

Features	Price list codes and colors					Dimensions (mm) L x H x Th.
CLADDING SLATS	White marmo	Light Grey	Savannah	Terracotta	Asphalt	
Grecato outdoor cladding	AF3040-BM	AF3041-GC	AF3042-S	AF3043-TC	AF3044-A	3000x170x26
PROFILES AND CORNERS	White marmo	Light Grey	Savannah	Terracotta	Asphalt	
CORNER - Wood effect	AF3040A-BM	AF3041A-GC	AF3042A-S	AF3043A-TC	AF3044A-A	3000x81x81
Start/finish profile clad. wood effect	AF3040P-BM	AF3041P-GC	AF3042P-S	AF3043P-TC	AF3044P-A	3000x81x56


Mounting accessories page 91




Cladding slat
wood effect

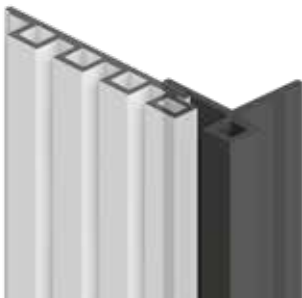


Corner profile for
cladding wood effect

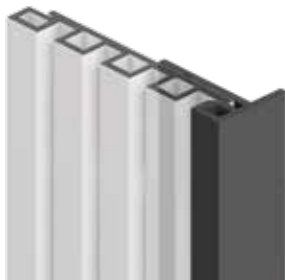

Start and finish profile for
cladding wood effect

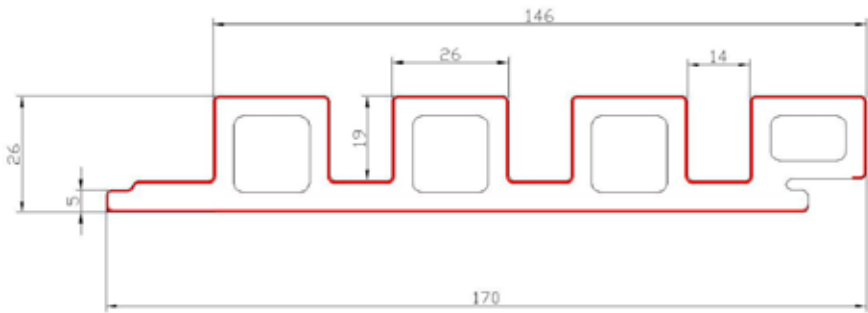

Interior: WPC Bamboo
Exterior: High-density resistant polymer



Available colors for slats and profiles *

White marble



Light Grey



Savannah



Terracotta



Asphalt



Actual colors may differ from those shown, color samples may be requested *



Grecato Large

Large coverage with typical
Greek-shaped finishing

professional grecato large cladding

PRICE LIST CODES

Features	Price list codes and colors			Dimensions (mm) L x H x Th.
	Teak	Oliva	Noce	
CLADDING SLATS	AF3050-LT	AF3051-LO	AF3052-LN	3000x205x25
PROFILES AND CORNERS	Teak	Oliva	Noce	
CORNER	AF3050A-LT	AF3051A-LO	AF3052A-LN	3000x81x81
START PROFILE	AF3050P-LT	AF3051P-LO	AF3052P-LN	3000x81x56


Mounting accessories page 91




Cladding slat
wood effect



Corner profile for cladding
wood effect

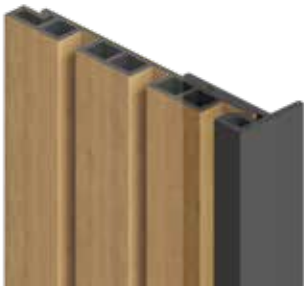


Start and finish profile for
cladding wood effect

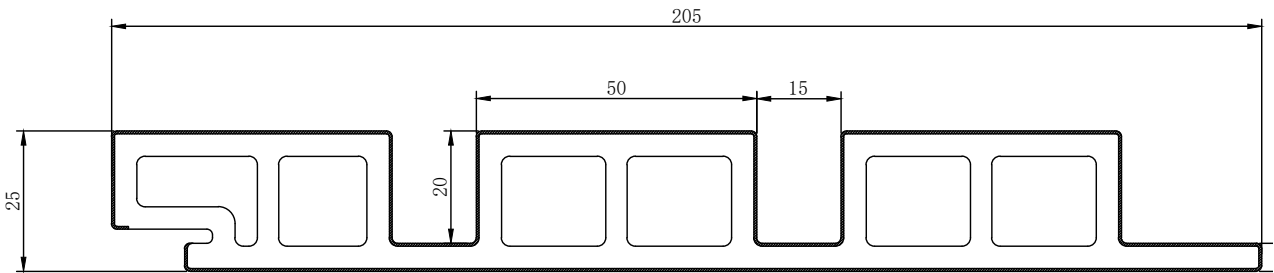

Interior: WPC Bamboo
Exterior: High-density resistant polymer



Available colors for slats and profiles *

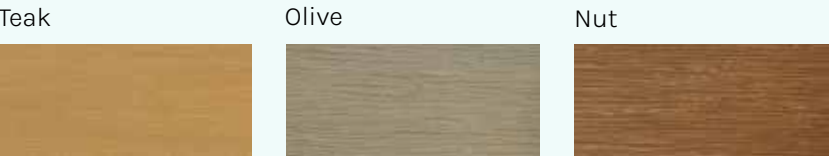

Actual colors may differ from those shown, color samples may be requested *

Mounting Accessories

Cladding Classic - Professional

PRICE LIST CODES

Features	Price list codes	Dimensions (mm) L - B x H x Th.
JOIST FOR FASTENING		
Aluminum joist	AF503	L 2200 50x15x2
CLIPS FOR FASTENING		
Stainless steel 304 clip for Classic cladding	AF603	35x15x6
Aluminum clip for Professional cladding	AF609	37x11x40
Stainless steel dual-purpose clip for Classic cladding	AF611	40x45x4,5
FASTENERS		
Stainless steel 304 screw for classic cladding	AF701	3,5x13
Stainless steel 304 screw for professional cladding	AF702	3,5x16



Joist




Fasteners



Stainless steel clips for
Classic cladding AF603




Stainless steel dual-purpose
clip for Classic cladding AF611




Aluminum clips
for Professional cladding AF609

TECHNICAL DRAWINGS



Stainless steel dual-purpose
clip for Classic cladding AF611



Aluminum clip AF609

Mounting Accessories

Cladding Professional Grecato- Grecato Large

PRICE LIST CODES


Features	Price list codes	Dimensions (mm) L - B x H x Th.
JOIST FOR FASTENING		
Aluminum joist	AF503	L 2200 50x15x2
CLIPS FOR FASTENING		
Aluminum clip for Grecato cladding	AF610	33x12x40
SUPPORT		
Aluminum support for fastening	AF612	80x5
FASTENERS		
Stainless steel 304 screw	AF702	3,5x16



Joist




Fasteners



Aluminum clips for
Professional Grecato Large cladding AF610

TECHNICAL DRAWINGS



Aluminum clip AF610

Installation Instructions

CLASSIC AND PROFESSIONAL CLADDING INSTALLATION

Joist center distance - vertical slats



Install the aluminum joists on a regular and smooth surface. Respect the distances as shown in the drawing.



After fixing the joists use the start clip using clip code AF602 to fix the first slat, then continue the installation using clip code AF601.



Vertical installation details.

POSA IN LINEA



POSA SFALSATA



* Min 300 mm
Max 400 mm

Measurements that must be respected for the validity of the warranty. *

Thermal expansion

Ambient temperature (°C)	Example length of slats to install and mm of gap to maintain only from the longitudinal part (ends) of the slats **				
°C	Example length of slats to install				
	m.l. 1.00	m.l. 1.50	m.l. 2.00	m.l. 2.50	m.l. 3.00
	Dimension in mm of the longitudinal gap between the slats (at the end)				
10	2,70	4,10	5,40	6,50	8,10
20	1,80	2,70	3,60	4,30	5,40
25	1,40	2,00	2,70	3,20	4,10
30	0,90	1,40	1,80	2,20	2,70
35	0,50	0,70	0,90	1,10	1,40

in respect of the temperature at the time of installation **

Joist center distance - horizontal slats


Instruction video



Install the aluminum joists on a regular and smooth surface. Respect the distances as shown in the drawing.



After fixing the joists use the start clip using clip code AF602 to fix the first slat, then continue the installation using clip code AF601.

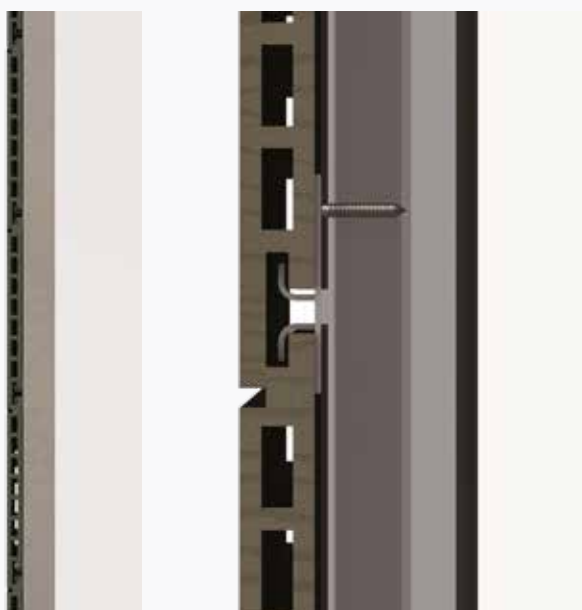

Horizontal installation details with clips.



IN-LINE INSTALLATION




STAGGERED
INSTALLATION





Min 300 mm
Max 400 mm *

Installation Instructions


PROFESSIONAL GRECATO AND GRECATO LARGE CLADDING INSTALLATION

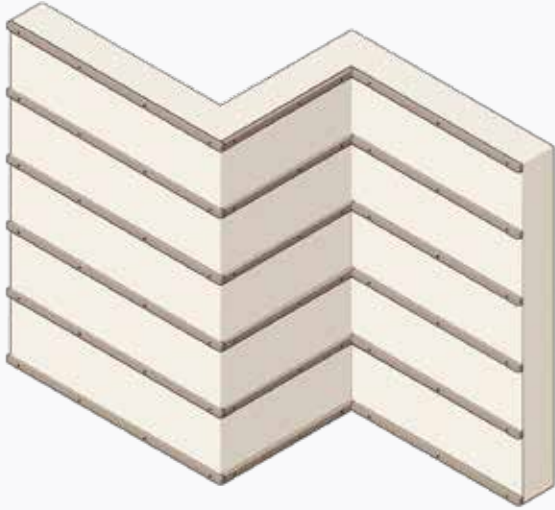




Fastening of joists with maximum center distance of 40 cm.

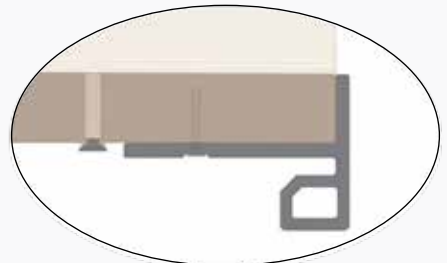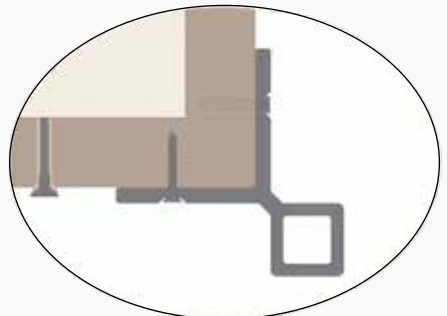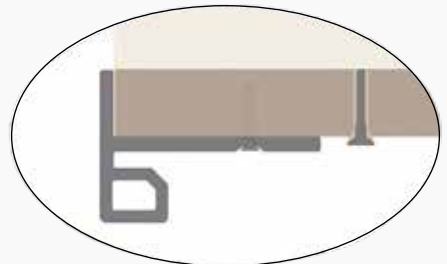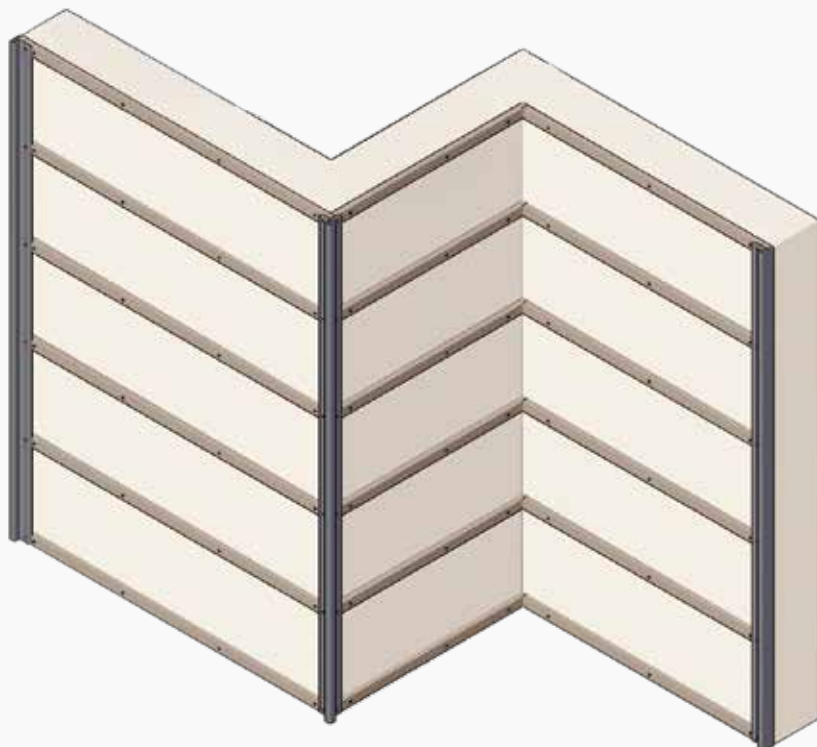



Install the corner start profiles and the terminal.

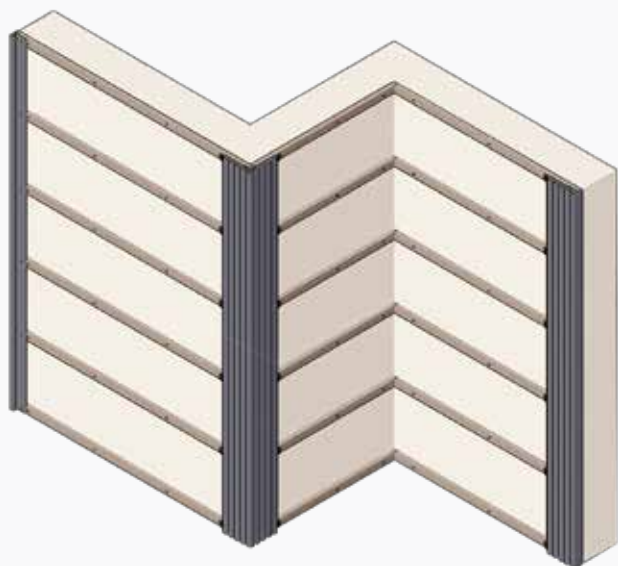


Start the cladding installation.

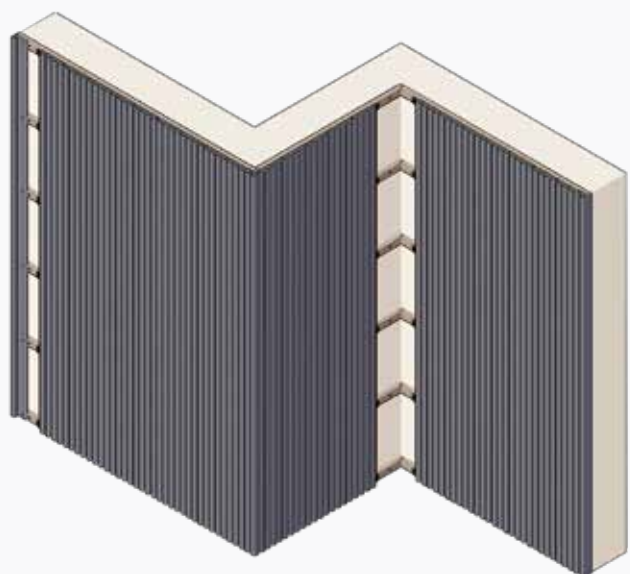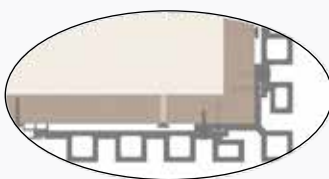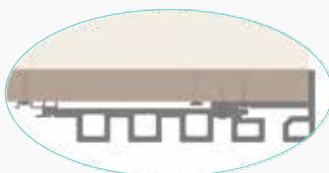

Continue the installation up to the corner.

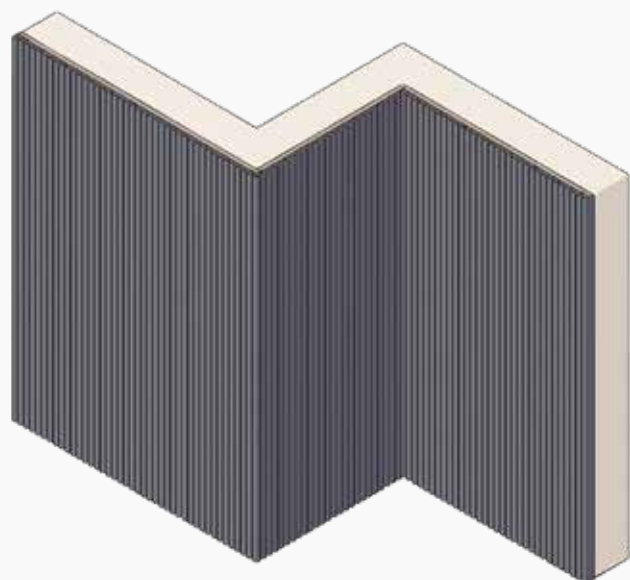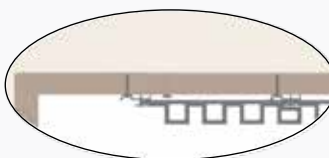

Complete installation.

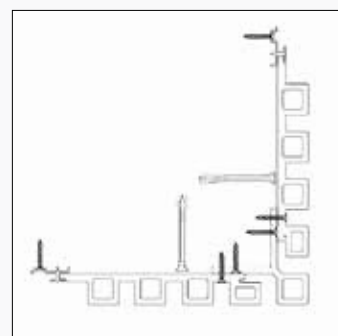

profiles

Finishes carefully designed to make the **finished work** as harmonious as possible. Flat profiles, corners, for benches and railings are the essential detail of class that meets every need.

Flat

Corner

For benches

For railings

Flat and Corner

PRICE LIST CODES

Features	Price list codes and colors					Dimensions (mm) L x H x Th.
FLAT AND CORNER PROFILES FLOORING/CLADDING CLASSIC	Ice	Grey	Wengé	Hazel	Chestnut	
CORNER flooring - Smooth effect	AF800-1GD	AF800-01GR	AF801-1WD	AF802-1ND	AF803-1CD	2200x40x40
CORNER cladding - Smooth effect	AF800GD	AF800GR	AF801WD	AF802ND	AF803CD	2900x40x40
FLAT flooring - Line effect on both sides	AF804-1GD	AF804-1GR	AF805-1WD	AF806-1ND	AF807-1CD	2200x72x11
FLAT - Side 1 wood effect, Side 2 smooth	AF808GD	/	AF809WD	AF810ND	AF811CD	2900x140x11
FLAT - Wood effect on both sides	AF816GD	/	/	AF817ND	AF818CD	2900x100x13
FLAT - WOOD EFFECT ON BOTH SIDES	White marble	Dove Grey	Light Grey	Asphalt	2200x100x12	
FLAT - 1 SIDE WOOD EFFECT + 1 SIDE SMOOTH EFFECT	AF251P-BM	AF251P-T	AF251P-GC	AF251P-A		
	Terracotta	Savannah	Green	Blue		
	AF251P-TC	AF251P-S	AF251P-V	AF251P-AZ		
CORNER PROFILES PROFESSIONAL FLOORING	White marble	Dove Grey	Light Grey	Asphalt	2200x45x45	
CORNER - Smooth effect	AF251A-BM	AF251A-T	AF251A-GC	AF251A-A		
	Terracotta	Savannah	Green	Blue		
	AF251A-TC	AF251A-S	AF251A-V	AF251A-AZ		
CORNER PROFILES PROFESSIONAL CLADDING	White marble	Light Grey	Savannah	Terracotta	Asphalt	
CORNER - Smooth effect	AF3030A-BM	AF3031A-GC	AF3032A-S	AF3033A-TC	AF3034A-A	3000x45x45
PROFILES AND CORNERS PROFESSIONAL GRECATO CLADDING	White marble	Light Grey	Savannah	Terracotta	Asphalt	
CORNER - SMOOTH EFFECT	AF3040A-BM	AF3041A-GC	AF3042A-S	AF3043A-TC	AF3044A-A	3000x81x81
Start/finish profile smooth effect	AF3040P-BM	AF3041P-GC	AF3042P-S	AF3043P-TC	AF3044P-A	3000x81x56



Corner profile smooth effect
(40x40)



Line effect both sides
(72x11)



Side 1 wood effect, side 2
smooth effect (140x11)



Wood effect both sides
(100x13)



fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes

Bench

profiles

PRICE LIST CODES

Features	Price list codes and colors		Dimensions (mm) L x H x Th.
BENCH PROFILES	Hazel	Chestnut	
Terminal WPC profile for benches	AF812ND	AF813CD	2000x98x32
Solid WPC profile	AF814ND	AF815CD	2000x57x32



Terminal profile for benches



Solid profile

Features	Price list codes and colors		Dimensions (mm) L x H x Th.
ASSEMBLED BENCH	Hazel	Chestnut	
Assembled bench with rivets and WPC bamboo slats and galvanized and anthracite painted metal structure	AF1206NP	AF1207CP	1450x750x540



Available colors for bench profiles *

Hazel



Chestnut



Actual colors may differ from those shown, color samples may be requested *

Railing


profiles

PRICE LIST CODES

Features	Price list codes and colors			Dimensions (mm) L x H x Th.
RAILING PROFILES	Ice	Hazel	Chestnut	
Profile with rounded end	AF819GD	AF822ND	AF825CD	930x100x13
Profile with rounded end	AF821GD	AF824ND	AF827CD	1430x100x13



Railing profile

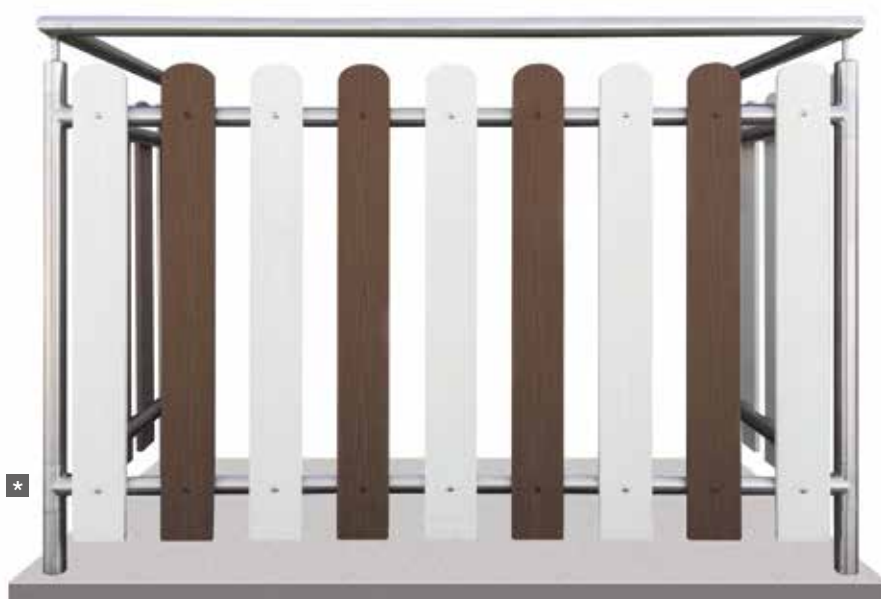

Application example
for slat fastening pre-drill the material



Available colors for **railing profiles** *

Ice



Hazel



Chestnut



Actual colors may differ from those shown, color samples may be requested *

fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes

sunshades

The solution that gives your exteriors the right combination of **performance and design**. Practical, unique and with customizable colors, in addition to protecting from the sun, they give uniqueness and elegance to the structure. A practical system, installed **horizontally or vertically**, that ensures your privacy on every occasion.

Sunshade

Slim Sunshade



Sunshades

PRICE LIST CODES

Features	Price list codes and colors				Dimensions (mm) L x H x Th.
	Beech	Ice	Hazel	Carbone	
Tubular WPC sunshade	AF900FD	AF901GD	AF902ND	AF903CD	2900x90x40




Sunshade

Available colors for sunshade *

Carbon



Ice

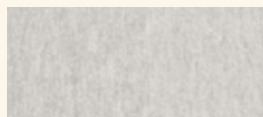

Beech




Hazel



Actual colors may differ from those shown, color samples may be requested *

TECHNICAL DRAWINGS

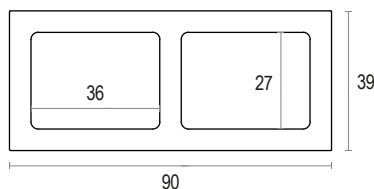

Wpc Sunshade

INSTALLATION SUGGESTIONS:

- Always use a metal core inside the WPC profile to avoid bending or curving.
- Possibility to install the profile vertically or horizontally.
- To fix screws or rivets ALWAYS PRE-DRILL the WPC profile.




Frangisole Slim

A smaller profile has been designed that guarantees excellent performance: possibility to insert aluminum or steel reinforcement

slim sunshade

PRICE LIST CODES

Features	Price list codes and colors				Dimensions (mm) L x H x Th.
	Beech	Ice	Hazel	Carbone	
Tubular WPC sunshade	AF904FD	/	AF904ND	/	3000x60x39

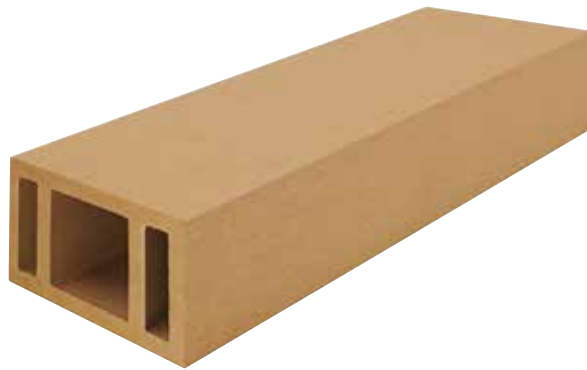

Slim sunshade

Available colors for sunshade *

Hazel




Beech



Actual colors may differ from those shown, color samples may be requested *

TECHNICAL DRAWINGS

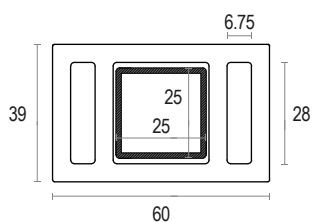

Wpc Slim sunshade

INSTALLATION SUGGESTIONS:

- Always use a metal core inside the WPC profile to avoid bending or curving.
- Possibility to install the profile vertically or horizontally.
- To fix screws or rivets ALWAYS PRE-DRILL the WPC profile.

railings

Quality and harmony location-proof: **WPC Bamboo delimiters** are the perfect choice for public and private construction. Available with two or more slats in various colors, they are the most suitable proposal for those seeking in installations, the modernity that fulfills the need to get closer to nature.

Quadro profile

L'unica




quadro profile

ADDITIONAL DELIMITER INFO

DELIMITER module of dimensions 2000x1100 mm composed of:

- 1 WPC Bamboo column
- 2 WPC Bamboo slats
- 2 optional galvanized tubes (25x10x2 mm)
- 1 galvanized iron post
- 1 closure cap

Technical and load tests of the railing with and without galvanized tubes can be requested from the company

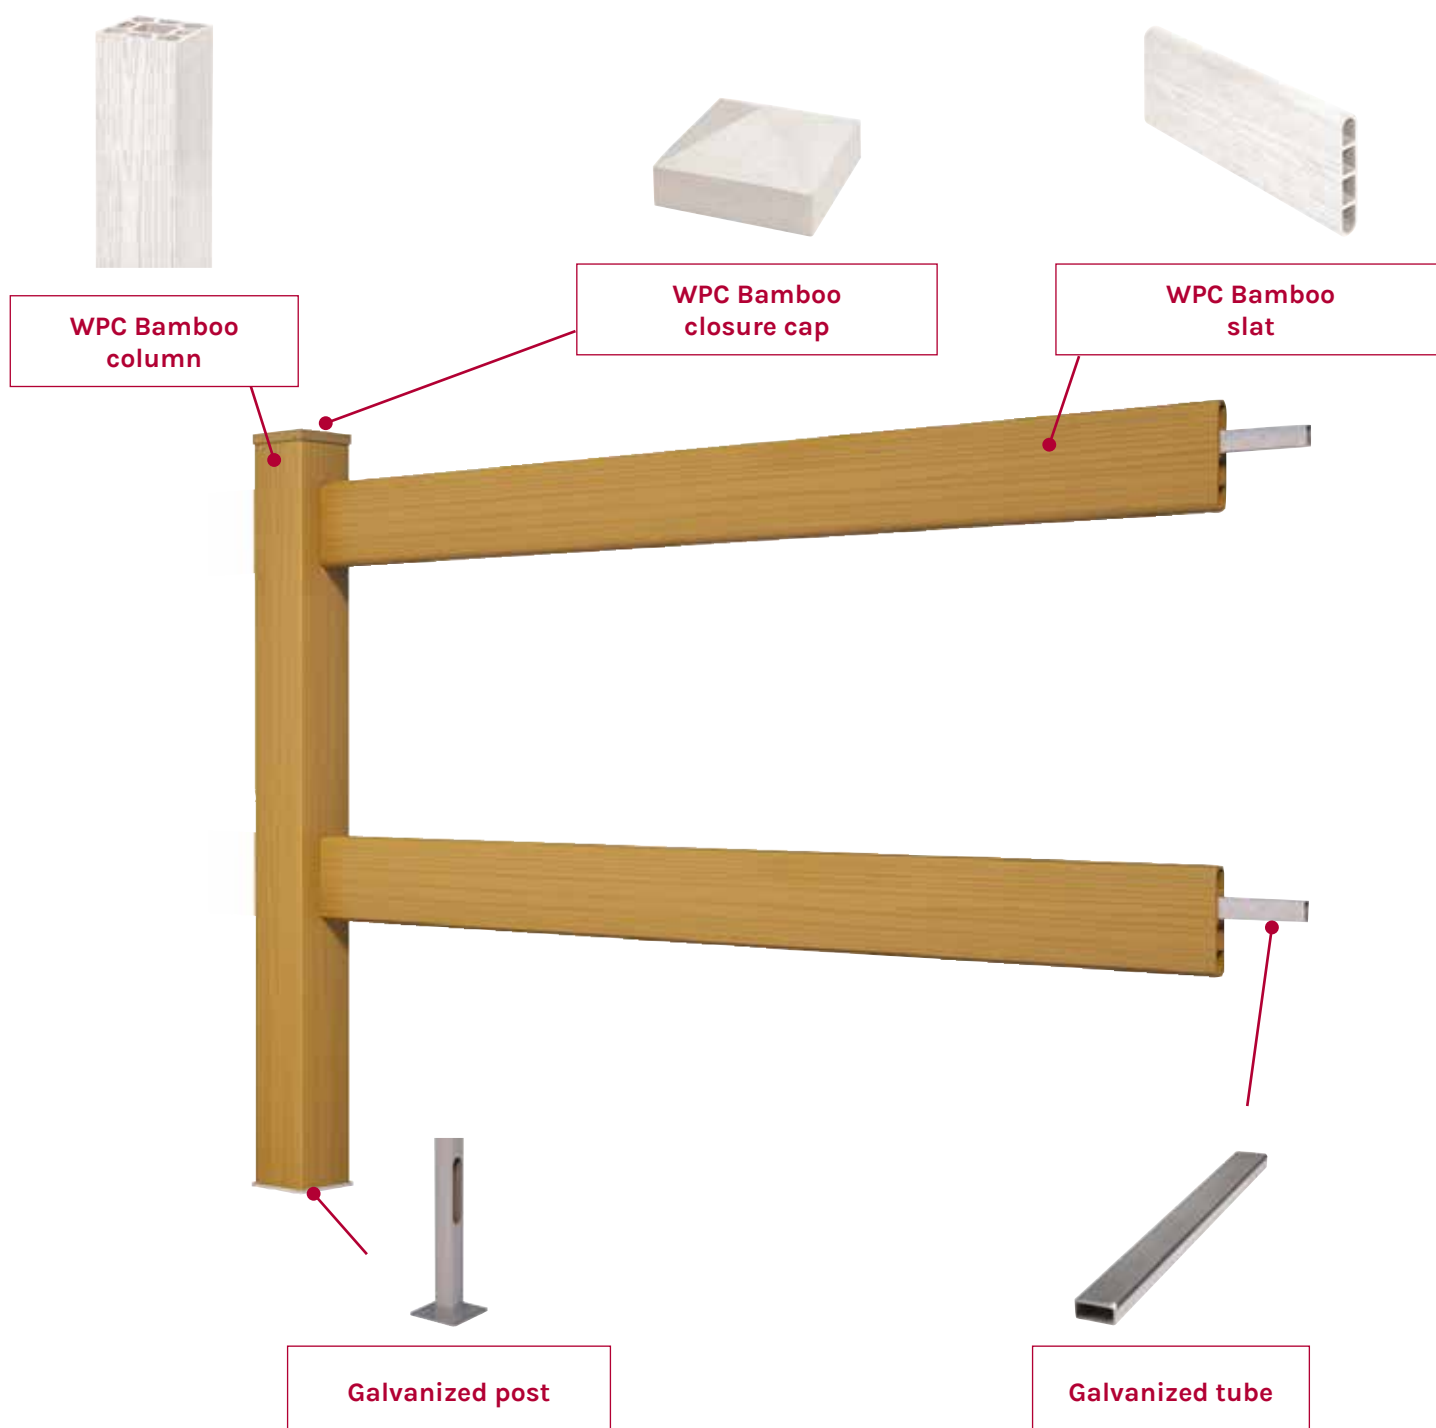


quadro profile


PRICE LIST CODES

Features	Price list codes and colors			Dimensions (mm) L x H
WPC BAMBOO RAILING MODULES	Ice	Hazel	Chestnut	
Standard modules	AF1300GD	AF1301ND	AF1302CD	2000x1100

POST CODES				
Model	Start post	Central post	90° corner post	Height (mm)
Anchor	PPT	PCT	PAT	1100
Cold-galvanized tube with slots dim. 40x40x2mm				

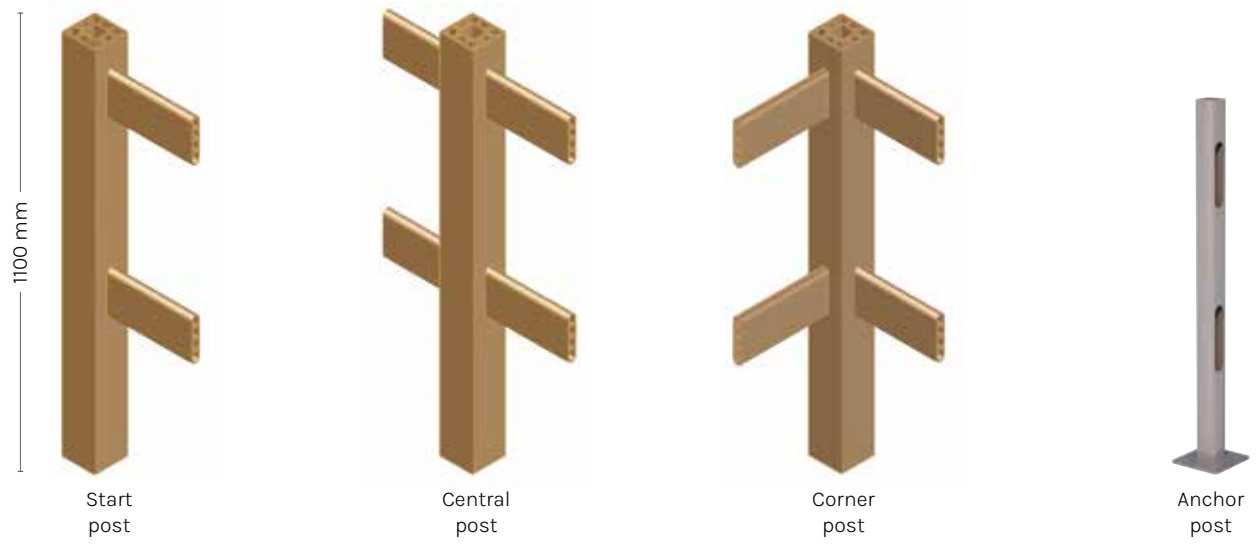

Available colors for quadro profile railing *

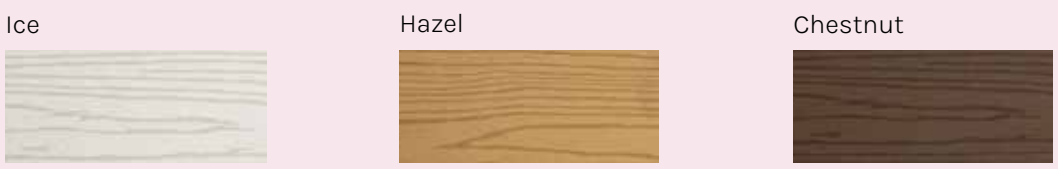

Actual colors may differ from those shown, color samples may be requested *

fencing
flooring
cladding
profiles
sunshades
railings
bamboo canes

Railing components

quadro profile

PRICE LIST CODES

Features	Price list codes and colors			Dimensions (mm) L x H x Th.
	Ice	Hazel	Chestnut	
WPC BAMBOO SLATS AND COLUMNS				
Wood-effect WPC Bamboo column without slat holes	AF1303GD-01	AF1304ND-01	AF1305CD-01	1100x100x100
Wood-effect WPC Bamboo slat	AF1306GD-01	AF1307ND-01	AF1308CD-01	2000x125x24
Wood-effect WPC Bamboo slat	AF1306GD	AF1307ND	AF1308CD	2900x125x24
CLOSING CAPS				
WPC Bamboo closing caps	AF1309G	AF1311N	AF1312C	110x110x43
IRON TUBE				
Galvanized iron tube (20x10x2)		AF1313		2000
Galvanized iron tube (20x10x2)		AF1314		30



Wood-effect board for railings



Wood-effect column




Closing cap



Galvanized iron tube

TECHNICAL DRAWINGS

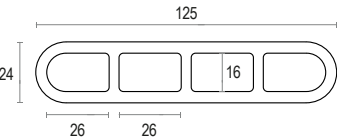


Quadro profile railing board

quadro profile



INSTALLATION SYSTEM with internal galvanized iron structure
To fix the board to the post use polyurethane expanding foam to guarantee solidity and strength to the fence.

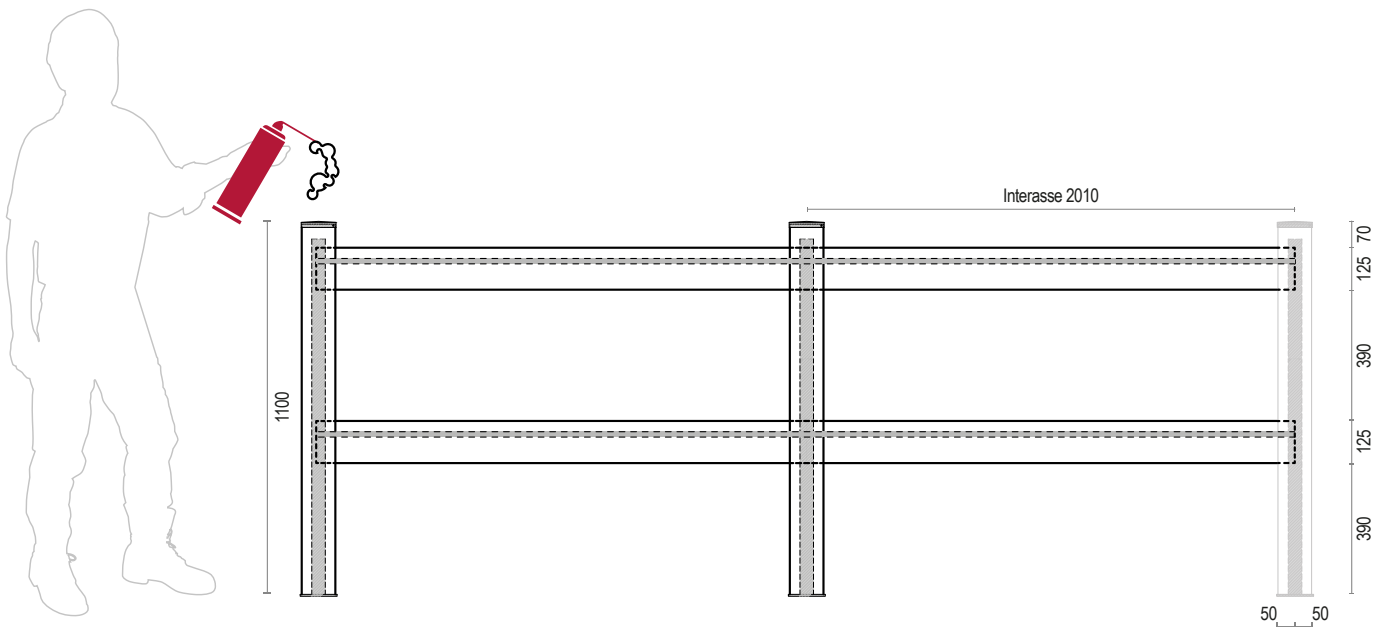

fencing

flooring

cladding

profiles

sunshades

railings

bamboo canes


L'unica

railing

Clean and linear aesthetics thanks to internal joints that strengthen the structure

The slat is inserted interlocking on the previously drilled column



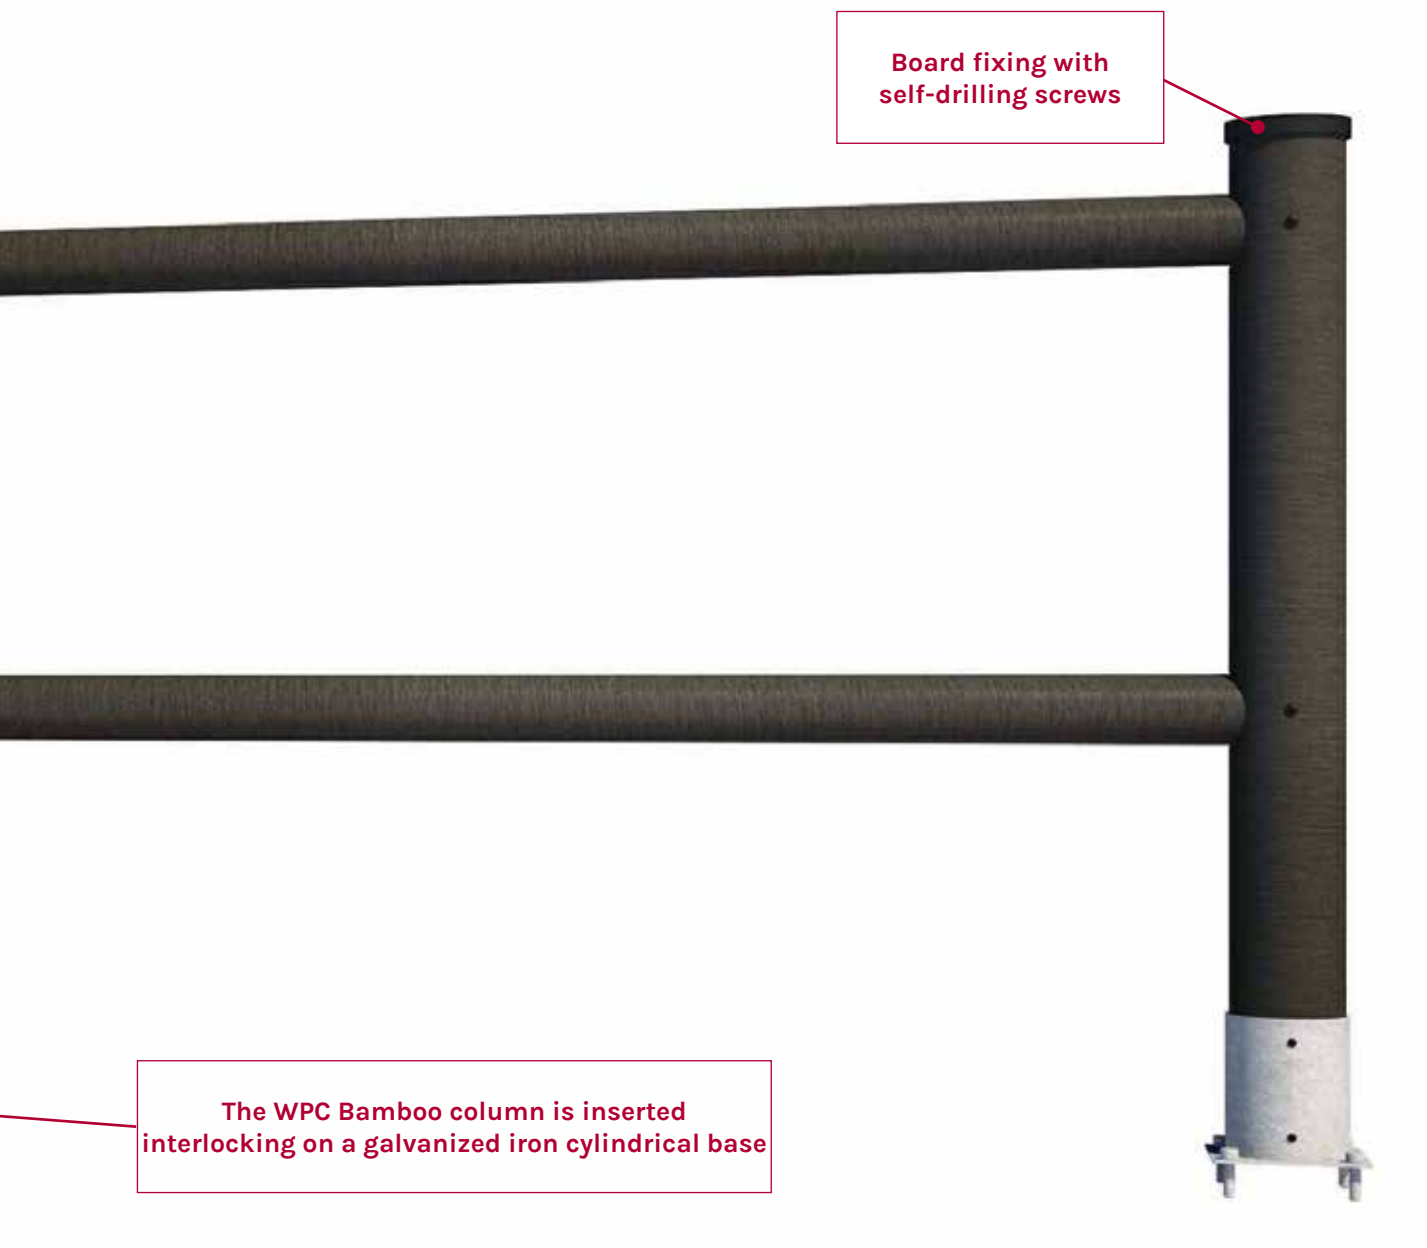

L'unica

railing


ADDITIONAL DELIMITER INFO

DELIMITER MODEL (length 2000mm)

- Round column H1100mm - Ø 120mm in WPC Bamboo
- Round horizontal boards in WPC Bamboo Ø 76mm
- Galvanized U-iron 39x39mm and square tube 60x60mm
- Cylindrical interlocking base in galvanized iron
- Galvanized painted iron cap
- Complete with screws

Technical and load tests of the railing with galvanized tubes can be requested from the company

The product requires no maintenance

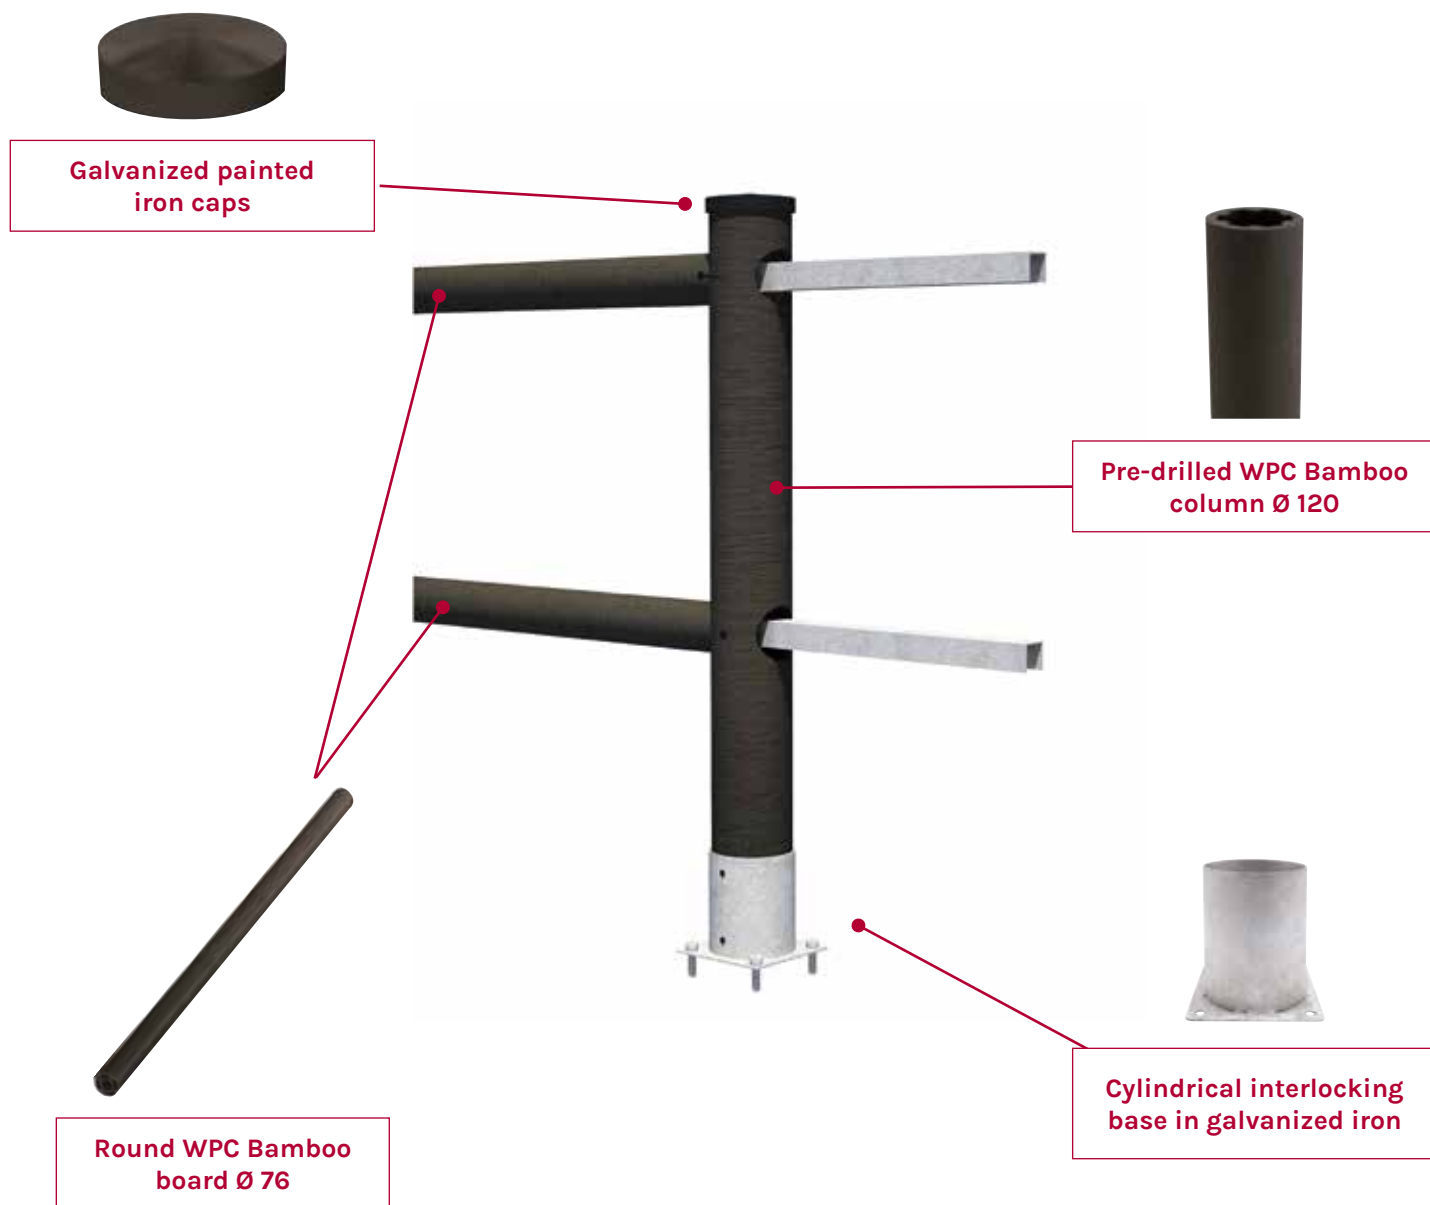

PRICE LIST CODES

Features	Price list codes and colors	Dimensions (mm) L x H
WPC BAMBOO RAILING MODULE	Dark walnut	
Standard WPC Bamboo module	S-TONDA-D	2000x1100

COLUMN codes		
Model	Price list codes	Dimensions (mm) H - Ø
Start WPC Bamboo column	S-TONDA-D-CP	1100 - Ø120
Central WPC Bamboo column	S-TONDA-D-CC	1100 - Ø120
Cylindrical interlocking base in galvanized iron for round profile railing model	S-TONDA-BASE	Plate 4 holes 150x150 150 H - Ø int. 125




Available colors for **round railings** *

Dark walnut



Actual colors may differ from those shown, *
color samples may be requested

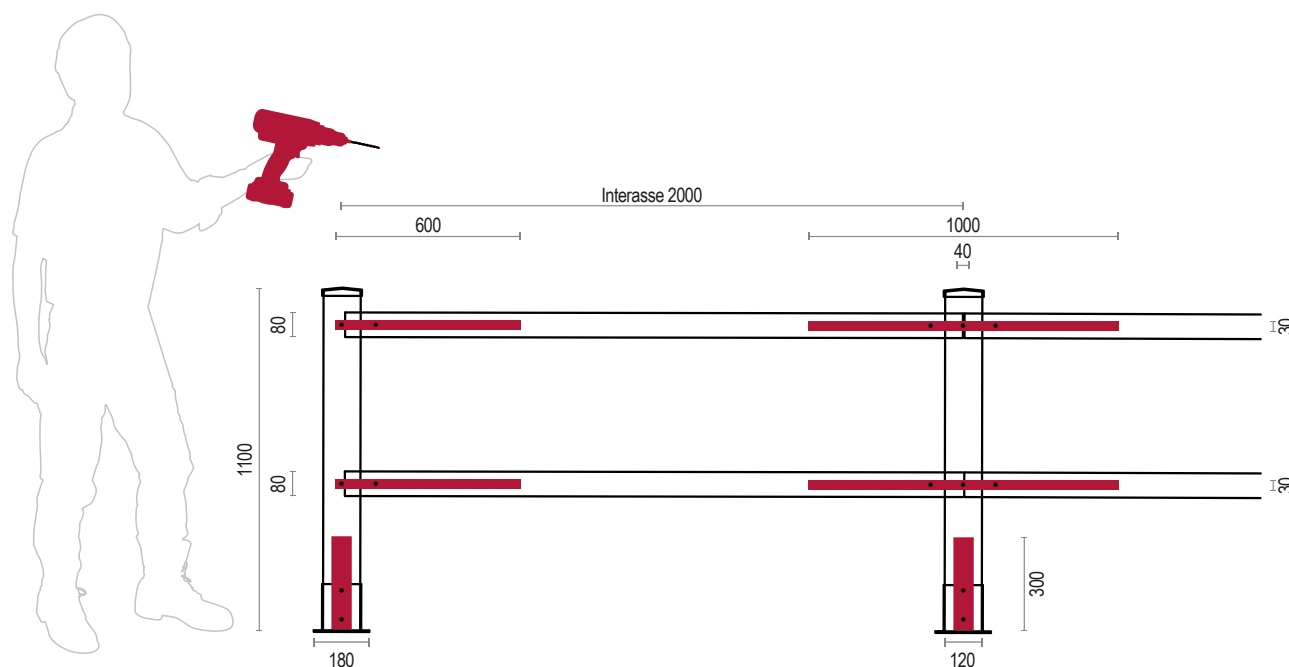

bamboo canes

Bamboo to decorate your home

bamboo canes

PRICE LIST CODES

Features	Price list codes	Dimensions (mm)
BAMBOO CANES		
Bamboo canes (base not included)	AF9010	Base 80x2000
	AF9011	Base 100x2000
	AF9012	Base 110x2000



Product for interior decoration only

* The base is not included in the product

Care and cleaning

Classic Line

Classic Line slats (flooring, fencing and cladding) require no maintenance.

Our composite product (WPC) composed of HDPE and bamboo fibers, could, after installation, release a completely harmless yellowish substance. This substance could appear in certain points, and then disappear.

If you want to speed up the substance removal process, you can use a pressure washer or wait for rain to ease this initial effect.

If mold stains should form, it is necessary to spray the product with liquid bleach, let it act for 5/10 minutes and wash with the pressure washer.


To remove grease and oil stains, use a simple degreaser.

Professional Line

Professional Line slats (flooring, cladding and privacy deluxe fencing, Vedo Non Vedo Deluxe fencing) require no maintenance.

For ordinary cleaning use a simple detergent and rinse with the pressure washer.

To remove grease and oil stains use a simple degreaser and rinse with the pressure washer.

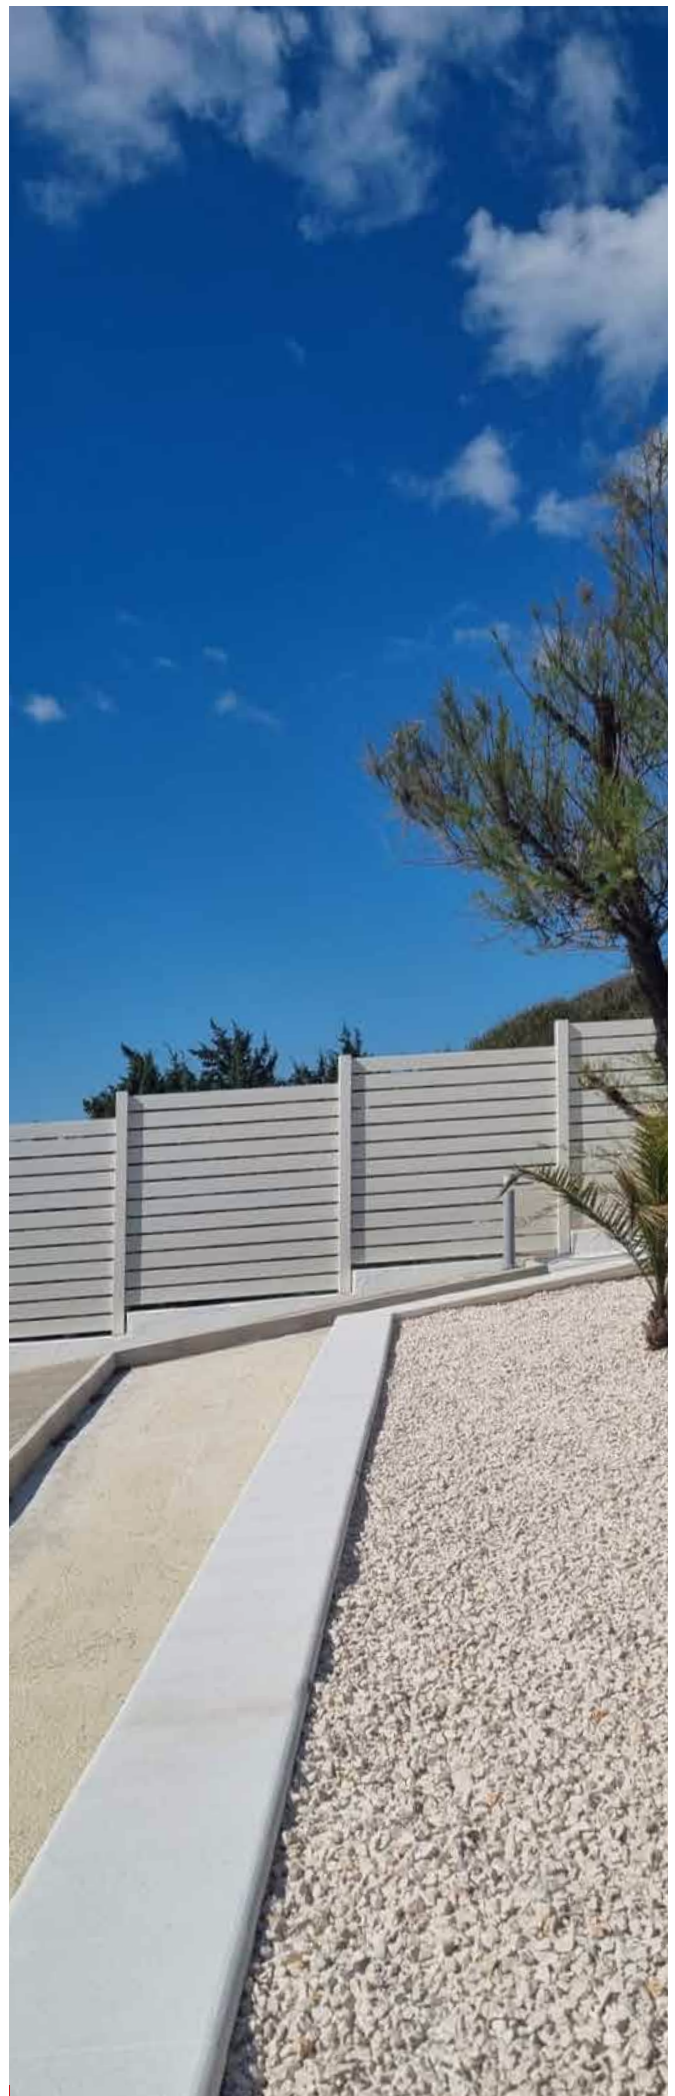

Frequently Asked Questions



DIY installation, stress-free!

This is because the installation is simple and intuitive and can be done comfortably independently.

WHAT TOOLS ARE NEEDED TO INSTALL WPC BAMBOO?

For installation, whether vertical or horizontal, standard equipment is used, which every wood professional has: saw, hammer, screwdriver, measuring tape and level.

DOES IT ALSO RESIST COLOR CHANGES AND SURFACE COMPACTNESS?

Being composed of 60% natural material, WPC Bamboo can, with prolonged exposure to sun and weather, slightly change color, without graying or fading intensely.

DOES WPC BAMBOO SPLINTER OR DETERIORATE LIKE WOOD?

No, our product is subjected to very intense accelerated tests that reproduce the most extreme external climatic changes in the laboratory.

WHAT OTHER USES DOES WPC BAMBOO HAVE?

Planters, pergolas, children's play areas, canopies, gazebos and much more.

HOW LONG DOES THE WARRANTY LAST?

Warranty: all products are covered by warranty that will be issued by the company upon customer request depending on the product purchased.

WHAT TEMPERATURES CAN IT WITHSTAND?

It can withstand temperatures ranging from -40°C to +60°C.

IS THE POLYETHYLENE CONTAINED IN WPC BAMBOO TOXIC OR DOES IT EMIT TOXIC GASES IF BURNED?

No, polyethylene is not toxic, in fact it is also used for food containers. When burned it transforms into carbon dioxide and vapor.

Partner



Via Carlo Marx, 3/5, 25019 Sirmione BS



+39 030 8621022



info@skygreen.it



www.sky-green.it

SKYGREEN, DEALER AND INSTALLER FOR ART WPC BAMBOO.

Fencing (Vedo Non Vedo and Privacy), cladding and outdoor flooring. Durable and maintenance-free material.


SKYGREEN, a company specialized in the supply and installation of synthetic grass, **makes it easy to create an always green space without any more maintenance.**

We design gardens, terraces, flowerbeds, playgrounds, pool edges and sports fields in synthetic grass so that they have a consistent aesthetic result all year round. Skygreen lawns offer a quality product that is **durable over time**, providing **xcellent resistance** to trampling and UV rays.

Skygreen synthetic grass is installed by specialized internal staff, using specific equipment.





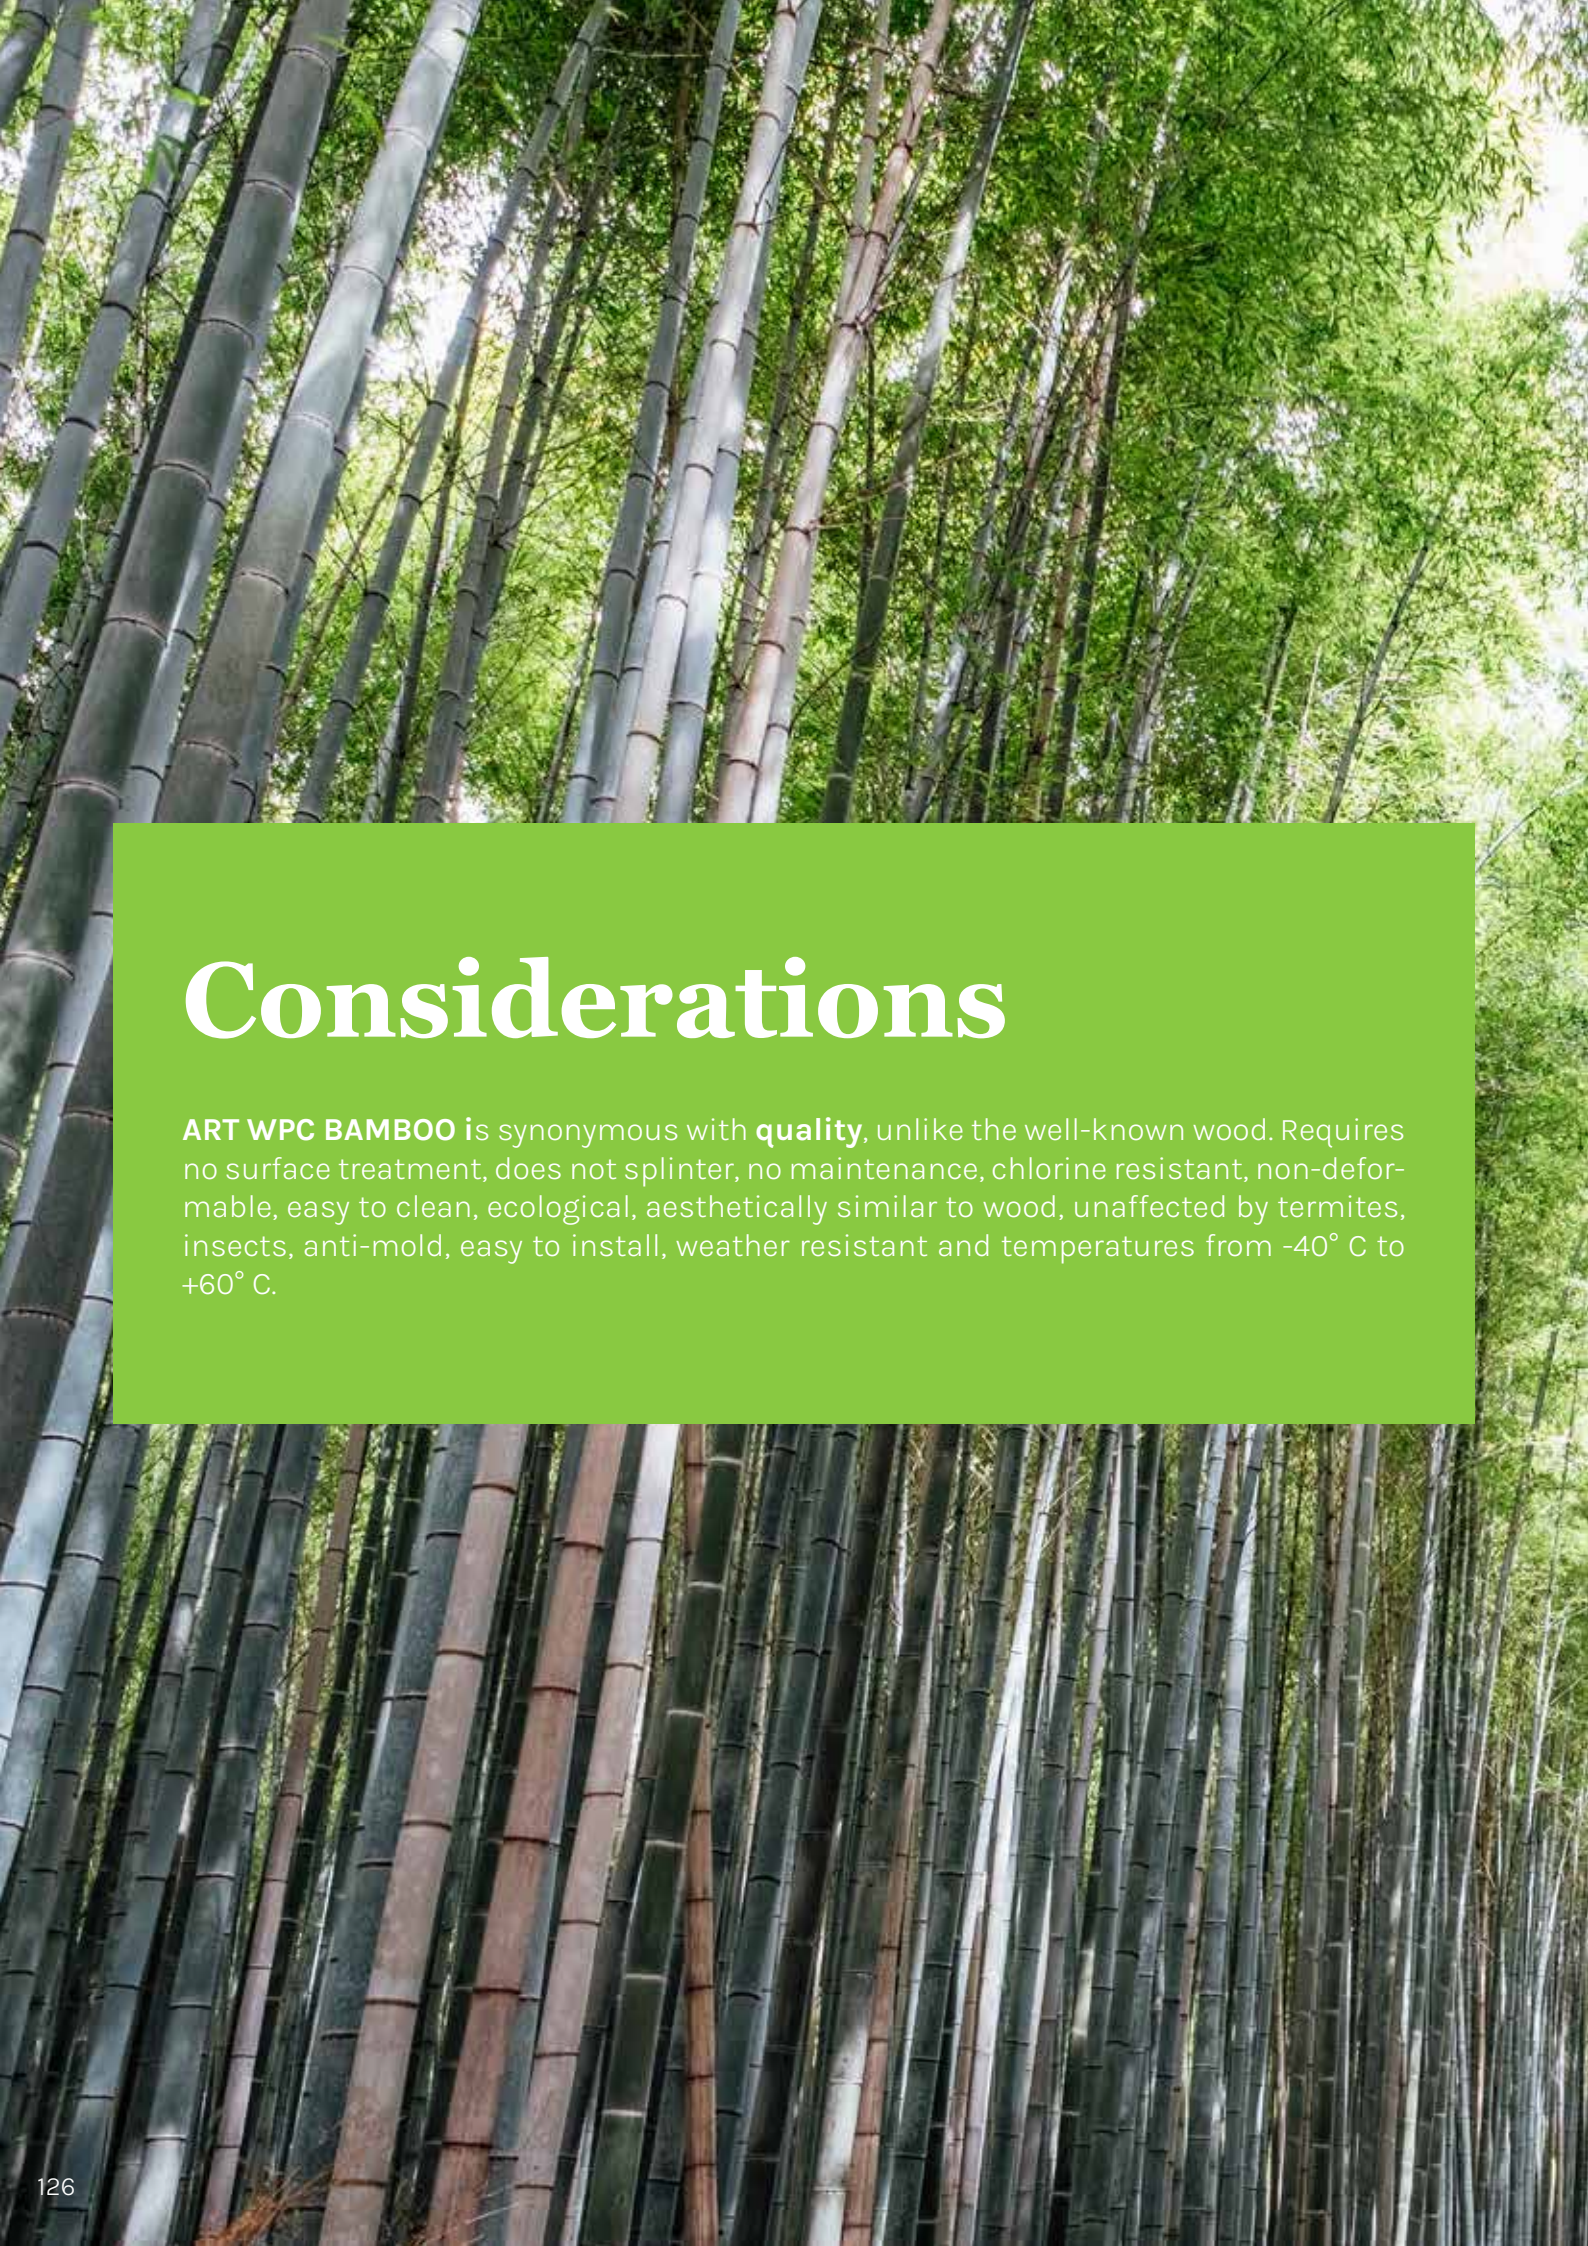

Considerations

ART WPC BAMBOO is synonymous with **quality**, unlike the well-known wood. Requires no surface treatment, does not splinter, no maintenance, chlorine resistant, non-deformable, easy to clean, ecological, aesthetically similar to wood, unaffected by termites, insects, anti-mold, easy to install, weather resistant and temperatures from -40° C to +60° C.





completed projects







GENERAL SALES CONDITIONS

1. Scope of application

The present General Sales Conditions ("General Conditions") govern the offer and sale of products ("products") manufactured and/or marketed by ART WPC BAMBOO s.r.l., VAT 04297490247, with legal headquarters in Via Pedemontana 28 - 36070 Castelgomberto (VI) and operational headquarters in Via Pedemontana 28 - 36070 Castelgomberto (VI) and customers of legal age who are not in conditions of incapacity to act, as regulated by the Consumer Code (Legislative Decree No. 206/2005) and applicable current legislation.

ART WPC BAMBOO s.r.l. reserves the right to modify these General Terms in order to adapt them to current legislation. In any case, the updated version of the General Terms of Sale can be consulted on the website www.wpcbamboo.it

2. Procedure di selezione e acquisto prodotti

The Customer before proceeding with the order must confirm having read and expressly accepted these sales conditions, also pursuant to and for the effects of articles 1341 and 1342 of the Italian Civil Code (current Italian civil code), also containing information on the right of withdrawal and having viewed the privacy policy. The clauses agreed in the purchase contract prevail in case of conflict with these General Terms of Sale.

3. Prezzi

I prezzi dei prodotti indicati nel listino sono validi per il territorio italiano e non sono comprensivi di IVA calcolata sulla base dell'aliquota pro tempore in vigore. ART WPC BAMBOO s.r.l. may adjust the VAT rate in case it has undergone legal changes. Product sales prices do not include shipping costs.

Installation costs are borne by the customer.

ART WPC BAMBOO s.r.l. reserves the right to make multiple partial deliveries for the same order, bearing any additional delivery costs.

4. Payment and Product availability

Payment can be made by bank transfer.

If the products are not available, even temporarily, ART WPC BAMBOO s.r.l. will promptly notify the customer who will have the right to terminate the contract and request a refund of the amounts paid.

Alternatively, the customer, without prejudice to the right to terminate the contract, may accept an extension of the delivery deadline pending restocking or, if restocking is not possible, the supply of a different product of equivalent or higher value, subject to the customer's express acceptance, in the latter case, of payment of the difference.

In case the customer exercises the right to terminate the contract, ART WPC BAMBOO s.r.l. will refund any amount already paid by the customer without delay and in any case within 5 working days from termination.

5. Product characteristics

ART WPC BAMBOO s.r.l. guarantees the high quality of products sold.

Each product is accompanied by an information sheet that illustrates its main characteristics and technical specifications ("product sheet").

The images and descriptions in this catalog reproduce the product characteristics as faithfully as possible.

In any case, such images must be understood as indicative and according to ordinary usage tolerance.

The customer is responsible for the choice of products

purchased and the correspondence and compliance with their needs of the specifications indicated by ART WPC BAMBOO s.r.l. in the product sheet.

ART WPC BAMBOO s.r.l. provides no warranty regarding the compatibility of products with other third-party products not conforming to the "Product Sheet", nor does it provide any warranty regarding the suitability of products for the specific use intended by the customer.

ART WPC BAMBOO s.r.l. reserves the right to modify the technical and aesthetic characteristics of its products, as well as their range.

ART WPC BAMBOO s.r.l. declines all responsibility in case of incorrect use and/or assembly of products and non-compliance with urban planning, static and safety regulations according to the installation locations.

All urban planning, static and safety checks according to the installation location, the suitability of the supports used and the related assembly system must be verified, by the customer, by a qualified technician, according to applicable current legal provisions.

6. Right of withdrawal

If the customer is a consumer, as defined in article 3 of the Consumer Code, they have the right to withdraw from the contract without specifying the reason, within fourteen (14) days from the day of receipt of the products.

The withdrawal may concern all (Total withdrawal) or only part (partial withdrawal) of the products purchased by the Consumer.

The right of withdrawal is exercised within the aforementioned period by sending a written communication addressed to ART WPC BAMBOO s.r.l. at Via Pedemontana 28 - 36070 Castelgomberto (VI) or by certified email to artwpcbamboo@pec.it containing the order references for which the right of withdrawal is exercised.

The direct costs of return will be borne by the customer who may request collection by ART WPC BAMBOO s.r.l..

For the correct exercise of the right of withdrawal, products must be returned intact, therefore complete in all their parts and in their original packaging.

Having ascertained the correct exercise of the right of withdrawal as indicated above, ART WPC BAMBOO s.r.l. will refund the payments made by the customer within 15 days of receiving the customer's withdrawal communication, using the same payment methods used by the customer for the initial transaction.

7. Product conformity warranty

- Legal warranty for Consumer Customer

The consumer customer, as defined in art. 3 of the Consumer Code, has the right to avail themselves of the legal warranty provided for in articles 128 to 132.

ART WPC BAMBOO s.r.l. therefore undertakes to deliver to the customer products conforming to the description and suitable for the use for which they are intended according to the indications on the catalog/website www.wpcbamboo.it, pursuant to art. 129 of the Consumer Code.

The conformity warranty is valid for 24 months from the date of delivery of the Products provided that the Customer i) reports the existence of the defect within and no later than 2 (two) months from the date of discovery of the defect, accompanying the report with photographic documentation and in any case ii) has made correct use of it in compliance with the intended use and what is indicated in the Product Sheet.

ART WPC BAMBOO s.r.l. may always reserve the right to object to the customer the lack of one of the requirements listed above. Upon expiration of the above-mentioned terms, ART WPC BAMBOO s.r.l. will not be responsible for any conformity defects found by the customer.

There is no lack of conformity if, at the time of conclusion of the contract, the customer was aware of the defect and could not ignore it with ordinary diligence or if the lack of conformity derives from instructions or materials provided by the customer.

In case of conformity defects reported within the terms, the customer may ask ART WPC BAMBOO s.r.l., at their choice, to repair the products or replace them, without costs in both cases (with exclusive reference only to the costs essential to make the products conform), unless the requested remedy is objectively impossible or excessively onerous compared to the other.

One of the two remedies is to be considered excessively onerous if it imposes unreasonable expenses on ART WPC BAMBOO s.r.l. compared to the other, taking into account: a) the value that the good would have if there were no lack of conformity; b) the extent of the lack of conformity; c) the possibility that the alternative remedy can be implemented without significant inconvenience to the customer.

The customer may then ask, at their choice, for an appropriate price reduction or termination of the contract in the event that a) repair and replacement are impossible or excessively onerous; b) if ART WPC BAMBOO s.r.l. has not provided the requested repair or replacement within a reasonable time; c) if the previously performed replacement or repair has caused significant inconvenience to the customer.

In any case, having received the report of lack of conformity, ART WPC BAMBOO s.r.l. may offer the customer any other available remedy, with the following effects: a) if the customer has already requested a specific remedy, ART WPC BAMBOO s.r.l. remains obliged to implement it, unless the customer accepts the proposed alternative remedy; b) if the customer has not already requested a specific remedy, they must accept the proposal or reject it by choosing another remedy.

A minor lack of conformity for which it has not been possible or is in any case excessively onerous to implement the remedy of repair or replacement will not give rise to the right to terminate the contract. If, as a result of the remedies indicated above, the defect declared by the customer does not turn out to be a lack of conformity pursuant to applicable regulations, ART WPC BAMBOO s.r.l. reserves the right to request payment of all expenses incurred for the intervention.

In case of product replacement or repair, the warranty terms relating to the replacement product or resulting from the repair are the same as the original product.

Therefore, the overall two-year duration of the legal warranty will in any case run from the delivery of the original product. To be able to benefit from the warranty, the customer must provide the purchase document.

For the regulation of the legal warranty, reference is made, in any case, to articles 128 and following of the Consumer Code.

- Legal warranty for Non-Consumer Customer (Professional)

The professional customer, as defined in art. 3 of the Consumer Code, has the right to avail themselves of the legal warranty according to the ordinary sales regulations provided for in the civil code.

This warranty provides, among other things, that the non-consumer customer, under penalty of forfeiture, reports any defect found in the purchased product within eight (8) days of discovery. The legal warranty mentioned above is valid for a maximum period of 12 (twelve) months from product delivery.

Beyond this term, ART WPC BAMBOO s.r.l. will in no way be responsible for defects found by the non-consumer customer.

The customer must allow ART WPC BAMBOO s.r.l., its couriers or any other person appointed by them, to verify the reported defects or anomalies.

Therefore, the customer must refrain from intervening or having a third party intervene on the products in such a way that they are not altered and/or modified making it impossible for ART WPC BAMBOO s.r.l. to verify the existence of the reported defect and/or anomaly.

8. Product Delivery

Delivery is carried out by carriers.

At the time of delivery, the presence of the customer or a person of their trust is required to check that the packaging is intact and clean and that the products are not damaged and correspond to what is stated on the transport document.

In particular, the customer must verify the condition of the packaging, the number of packages and the products in terms of quantity, codes, condition and characteristics.

Any damage, shortages, defects, other apparent defects or non-conformity of the delivered products with respect to what is stated on the transport document must be contested to the carrier at the time of receipt by means of a specific description, reported on the transport document and reported to ART WPC BAMBOO s.r.l. within [8] days from the delivery date.

The customer must allow ART WPC BAMBOO s.r.l., its couriers or any other person appointed by them, to verify the reported defects or anomalies.

Therefore, the customer must refrain from intervening or having a third party intervene on the products in such a way that they are not altered and/or modified making it impossible for ART WPC BAMBOO s.r.l. to verify the existence of the reported defect and/or anomaly.

9. Force Majeure

ART WPC BAMBOO s.r.l. cannot be held responsible for the total or partial non-fulfillment of its obligations, to the extent that such non-fulfillment is due to unforeseen circumstances or the occurrence of a force majeure event such as, by way of example only, flood, fire, storm, lack of raw materials, transport strike, partial or total strike or lockout, or pandemic.

In this case, ART WPC BAMBOO s.r.l. undertakes to communicate without delay to the customer the occurrence of a force majeure event as soon as possible and at most within five (5) working days of the occurrence of such event.

The parties must agree in order to determine together the methods of execution of the order for the duration of the force majeure case. If the force majeure event should last for more than one month, the customer may withdraw from the contract and ART WPC BAMBOO s.r.l. will refund to the customer the amounts paid in relation to the order.

10. Customer Service and Complaints

It is possible to request information, send communications, ask for assistance and submit complaints by contacting ART WPC BAMBOO s.r.l. by the following methods:


- by telephone
- at email info@wpcbamboo.it and at pec.artwpcbamboo@pec.it

11. Privacy

The customer can obtain all information relating to the processing of their personal data and the rights they can exercise pursuant to current data protection legislation, in particular Regulation EU 2016/679 (hereinafter also: "GDPR") on the website www.wpcbamboo.it, by viewing the privacy policy pursuant to art. 13 of Regulation EU 2016/679 and the cookie policy.

12. Applicable law – out-of-court dispute resolution

The sales contract is governed by Italian law. Exclusive jurisdiction Vicenza.

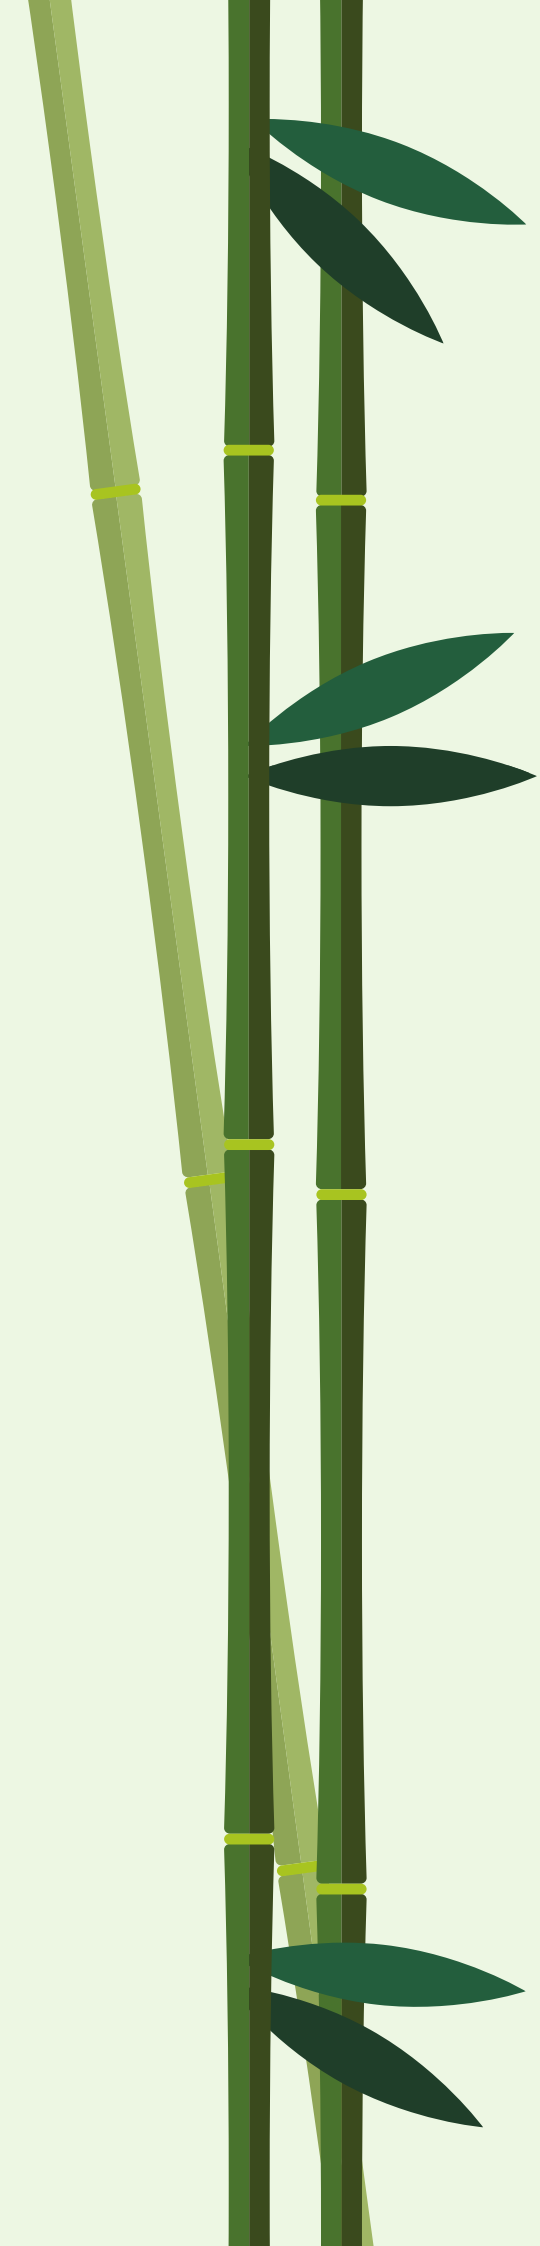

ART WPC BAMBOO

Via Pedemontana 28
36070 Castelgomberto (VI) - Italia

Tel: +39 0445 947870
info@wpcbamboo.it
commerciale@wpcbamboo.it

www.wpcbamboo.it

