# **Posts**

#### **Immersion**

Post

Cold-galvanized tube 40x40 th. 2 mm Heights: 1000 mm 1200 mm 1500 mm


#### **Anchor**

Post

## SQUARE BASE POST

Height 1000 mm **Plate** 100 x 100 Hole 12 mm Hole center 15 mm Hot-dip galvanized **Tube** 40x40 x th. 2,5 mm hot-dip galvanized

Support plate th. 8 mm




**Anchor** Post

> RECTANGULAR BASE POST

> > **Plate** 190 x 110 Hole 12 mm Hole center 20 mm Hot-dip galvanized **Tube** 40x40 x th. 2,5 mm hot-dip galvanized Support plate

Height 1200 mm



#### Side


Height 1000 mm Plate 200x100 mm Hole 12 mm with central reinforcement **Tube** 40x40 th. 2.5 mm hot-dip galvanized Support plate thickness 8 mm Wall plate thickness 5 mm

### **Angular**

Post

#### CONVEX CORNER POST

Height 1000 mm **Plate** 150x100 mm **Tube** 40x40 x th. 2.5 mm hot-dip galvanized Support base 100x100 x th. 8 mm

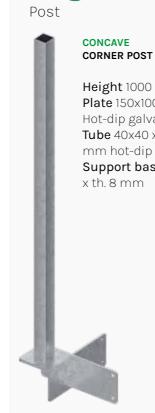

# **Angular**




Galvanized

# **TiltablePost**





Hot-dip galvanized tube 40x40 th. 2,5 mm Hole 12 mm Hole center 15 mm Plate thickness 8 mm




The galvanized tiltable post is used for the **Vedo Non Vedo** Deluxe and Privacy Deluxe.

> Suitable for maximum inclination of 30°.





**N.B.** The WPC column must be cut during installation, based on the necessary inclination.



FIXING DOWELS NOT INCLUDED

FIXING DOWELS NOT INCLUDED